

Y-bearings and Y-bearing units



® SKF is a registered trademark of the SKF Group.

© SKF Group 2009

The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB BU/P1 06001 EN · November 2009

This publication supersedes catalogue 5001 E.

Printed in Sweden on environmentally friendly paper.

Principles of selection and application	15
Y-bearings	79
Y-bearing plummer block units	111
Flanged Y-bearing units	163
Y-bearing take-up units	235
Engineered Y-bearing units	247
Other related SKF products	301
Product index	309

1

2

3

4

5

6

7

8

Contents

Foreword.....	7
SKF – the knowledge engineering company	10
1 Principles of selection and application.....	15
Designs.....	16
Bearing terminology.....	17
Y-bearings (insert bearings/wide inner ring bearings)	18
Y-bearing units (mounted ball bearing, unit ball).....	19
Selection of Y-bearing unit type.....	24
Locating on the shaft	25
Loads	26
Seals	27
Permissible operating temperatures	28
Speeds.....	29
Application note	29
Selection of Y-bearing unit size	30
Load carrying ability and life.....	30
Selecting the bearing unit size using the life equations.....	30
Equivalent dynamic bearing load	32
Dynamic bearing loads	34
Requisite minimum load.....	34
Axial load carrying ability.....	34
Selecting the bearing unit size using the static load carrying capacity	35
Speeds.....	38
Design of Y-bearing arrangements	40
Axial displacement	40
Misalignment	42
Support surfaces	42
Attaching to the support surface.....	43
Shaft tolerances.....	43
Rubber seating rings.....	45
End covers	47
Lubrication and maintenance	48
Grease fills.....	48
Relubrication	48
Relubrication intervals.....	50
Mounting instructions	52
Mounting instructions – general	52

Mounting instructions for Y-bearing plummer block units	
with a composite (Y-TECH) or cast housing and grub screws.....	56
with a cast housing and an eccentric locking collar	57
with a cast housing and an adapter sleeve	58
with a pressed steel housing and grub screws	60
with a pressed steel housing and an eccentric locking collar	62
Mounting instructions for Flanged Y-bearing units	
with a composite (Y-TECH) or cast housing and grub screws.....	64
with a composite (Y-TECH) or cast housing and an eccentric locking collar.....	65
with a cast housing and an adapter sleeve	66
with a pressed steel housing and grub screws	68
with a pressed steel housing and an eccentric locking collar	70
Mounting instructions for Y-bearing take-up units	
with a cast housing and grub screws	72
with a cast housing and an eccentric locking collar	73
Storing Y-bearings and Y-bearing units.....	74
Designation systems	75
2 Y-bearings.....	79
Product tables	
2.1 Y-bearings with grub screws, metric shafts	92
Y-bearings with grub screws, inch shafts.....	94
2.2 Y-bearings with an eccentric locking collar, metric shafts	98
Y-bearings with an eccentric locking collar, inch shafts.....	100
2.3 Y-bearings with a tapered bore on an adapter sleeve, metric shafts.....	102
Y-bearings with a tapered bore on an adapter sleeve, inch shafts.....	104
2.4 Y-bearings with a standard inner ring, metric shafts	106
2.5 Y-bearings with a hexagonal bore, inch shafts	108
3 Y-bearing plummer block units.....	111
Product tables	
3.1 Y-TECH plummer block units with grub screws, metric shafts	120
3.2 Y-bearing plummer block units with a cast housing and grub screws, metric shafts	122
inch shafts	126
3.3 Y-bearing plummer block units with a cast housing and an eccentric locking collar, metric shafts	134
inch shafts	136
3.4 Y-bearing plummer block units with a cast housing and an adapter sleeve, metric shafts	142
inch shafts	144
3.5 Y-bearing plummer block units with a shortened cast housing and grub screws, metric shafts	148
3.6 Y-bearing plummer block units with a shortened cast housing and an eccentric locking collar, metric shafts	150
3.7 Y-bearing plummer block units with a pressed steel housing and grub screws metric shafts	152
inch shafts	156
3.8 Y-bearing plummer block units with a pressed steel housing and an eccentric locking collar metric shafts	158
inch shafts	160

4 Flanged Y-bearing units	163
Product tables	
4.1 Flanged Y-TECH units with a housing with a square flange and grub screws, metric shafts	174
4.2 Flanged Y-TECH units with a housing with an oval flange and grub screws, metric shafts	176
4.3 Flanged Y-bearing units with a cast housing with a square flange and grub screws, metric shafts	178
inch shafts	182
4.4 Flanged Y-bearing units with a cast housing with a square flange and an eccentric locking collar, metric shafts	188
inch shafts	190
4.5 Flanged Y-bearing units with a cast housing with a square flange and an adapter sleeve, metric shafts	194
inch shafts	196
4.6 Flanged Y-bearing units with a cast housing with an oval flange and grub screws, metric shafts	200
inch shafts	202
4.7 Flanged Y-bearing units with a cast housing with an oval flange and an eccentric locking collar, metric shafts	208
inch shafts	210
4.8 Flanged Y-bearing units with a cast housing with an oval flange and an adapter sleeve, metric shafts	214
inch shafts	216
4.9 Flanged Y-bearing units with a cast housing with a round flange and grub screws, metric shafts	218
4.10 Flanged Y-bearing units with a pressed steel housing and grub screws, metric shafts	220
inch shafts	224
4.11 Flanged Y-bearing units with a pressed steel housing and an eccentric locking collar, metric shafts	228
inch shafts	232
5 Y-bearing take-up units	235
Product tables	
5.1 Y-bearing take-up units with a cast housing and grub screws, metric shafts	238
inch shafts	240
5.2 Y-bearing take-up units with a cast housing and an eccentric locking collar, metric shafts	244
6 Engineered Y-bearing units	247
Product tables	
6.1 Y-bearings for extreme temperatures, metric shafts	254
inch shafts	255
6.2 Y-bearing plummer block units for extreme temperatures, metric shafts	256
inch shafts	258

6.3	Flanged Y-bearing units with a cast housing with a square flange, for extreme temperatures,	
	metric shafts	260
	inch shafts	261
6.4	Flanged Y-bearing units with a cast housing with an oval flange, for extreme temperatures,	
	metric shafts	263
	inch shafts	264
6.5	SKF ConCentra ball bearing units with a plummer block housing,	
	metric shafts	270
	inch shafts	272
6.6	Y-bearing plummer block units for the food industry,	
	metric shafts	280
	inch shafts	282
6.7	Y-bearing plummer block units with a short base for the food industry,	
	metric shafts	284
	inch shafts	286
6.8	Flanged Y-bearing units with a housing with a square flange, for the food industry,	
	metric shafts	288
	inch shafts	290
6.9	Flanged Y-bearing units with a housing with an oval flange, for the food industry,	
	metric shafts	292
	inch shafts	294
6.10	Y-bearing take-up units for the food industry,	
	metric shafts	296
	inch shafts	298
7	Other related SKF products	301
8	Product index.....	309



The SKF brand now stands for more than ever before, and means more to you as a valued customer.

While SKF maintains its leadership as the hallmark of quality bearings throughout the world, new dimensions in technical advances, product support and services have evolved SKF into a truly solutions-oriented supplier, creating greater value for customers.

These solutions encompass ways to bring greater productivity to customers, not only with breakthrough application-specific products, but also through leading-edge design simulation tools and consultancy services, plant asset efficiency maintenance programmes, and the industry's most advanced supply management techniques.

The SKF brand still stands for the very best in rolling bearings, but it now stands for much more.

SKF – the knowledge engineering company

Foreword

This catalogue provides a representative overview of the range of Y-bearings and Y-bearing units available from SKF. The data in this catalogue is based on the latest standards and product upgrades. However, SKF reserves the right to make any changes necessary as a result of continuous improvement with respect to materials, design and manufacture.

This catalogue contains all the data relevant to Y-bearings and Y-bearing units. All the data required to select a Y-bearing or Y-bearing unit respectively are listed in the product tables. Descriptions of the Y-bearing and Y-bearing unit types including design features and other information precede each product section. General data regarding selecting a Y-bearing or Y-bearing unit type and size, speeds, bearing arrangement design, lubrication, mounting and designations are included in the catalogue too.

The catalogue is designed so that product information is easy to find and use. Each of the 8 chapters listed in the table of contents is clearly identified by a number and colour.

Unit conversions

Quantity	Unit	Conversion			
Length	inch	1 mm	0,03937 in	1 in	25,40 mm
	foot	1 m	3,281 ft	1 ft	0,3048 m
	yard	1 m	1,094 yd	1 yd	0,9144 m
	mile	1 km	0,6214 mile	1 mile	1,609 km
Area	square inch	1 mm ²	0,00155 sq.in	1 sq.in	645,16 mm ²
	square foot	1 m ²	10,76 sq.ft	1 sq.ft	0,0929 m ²
Volume	cubic inch	1 cm ³	0,061 cub.in	1 cub.in	16,387 cm ³
	cubic foot	1 m ³	35 cub.ft	1 cub.ft	0,02832 m ³
	imperial gallon	1 l	0,22 gallon	1 gallon	4,5461 l
	U.S. gallon	1 l	0,2642 U.S. gallon	1 U.S. gallon	3,7854 l
Velocity, speed	foot per second	1 m/s	3,28 ft/s	1 ft/s	0,30480 m/s
	mile per hour	1 km/h	0,6214 mile/h (mph)	1 mile/h (mph)	1,609 km/h
Mass	ounce	1 g	0,03527 oz	1 oz	28,350 g
	pound	1 kg	2,205 lb	1 lb	0,45359 kg
	short ton	1 tonne	1,1023 short ton	1 short ton	0,90719 tonne
	long ton	1 tonne	0,9842 long ton	1 long ton	1,0161 tonne
Density	pound per cubic inch	1 g/cm ³	0,0361 lb/cub.in	1 lb/cub.in	27,680 g/cm ³
Force	pound-force	1 N	0,225 lbf	1 lbf	4,4482 N
Pressure, stress	pounds per square inch	1 MPa	145 psi	1 psi	$6,8948 \times 10^3$ Pa
Moment	inch pound-force	1 Nm	8,85 in.lbf	1 in.lbf	0,113 Nm
Power	foot-pound per second	1 W	0,7376 ft lbf/s	1 ft lbf/s	1,3558 W
	horsepower	1 kW	1,36 HP	1 HP	0,736 kW
Temperature	degree	Celsius	$t_C = 0,555 (t_F - 32)$	Fahrenheit	$t_F = 1,8 t_C + 32$


SKF – the knowledge engineering company

From the company that invented the self-aligning ball bearing more than 100 years ago, SKF has evolved into a knowledge engineering company that is able to draw on five technology platforms to create unique solutions for its customers. These platforms include bearings, bearing units and seals, of course, but extend to other areas including: lubricants and lubrication systems, critical for long bearing life in many applications; mechatronics that combine mechanical and electronics knowledge into systems for more effective linear motion and sensorized solutions; and a full range of services, from design and logistics support to conditioning monitoring and reliability systems.

Though the scope has broadened, SKF continues to maintain the world's leadership in the design, manufacture and marketing of rolling bearings, as well as complementary products such as radial seals. SKF also holds an increasingly important position in the market for linear motion products, high-precision aerospace bearings, machine tool spindles and plant maintenance services.

The SKF Group is globally certified to ISO 14001, the international standard for environmental management, as well as OHSAS 18001, the health and safety management standard. Individual divisions have been approved for quality certification in accordance with either ISO 9001 or other customer specific requirements.

With over 100 manufacturing sites worldwide and sales companies in 70 countries, SKF is a truly international corporation. In addition, our distributors and dealers in some 15 000 locations around the world, an e-business marketplace and a global distribution system put SKF close to customers for the supply of both products and services. In essence, SKF solutions are available wherever and whenever customers need them. Overall, the SKF brand and the corporation are stronger than ever. As the knowledge engineering company, we stand ready to serve you with world-class product competencies, intellectual resources, and the vision to help you succeed.

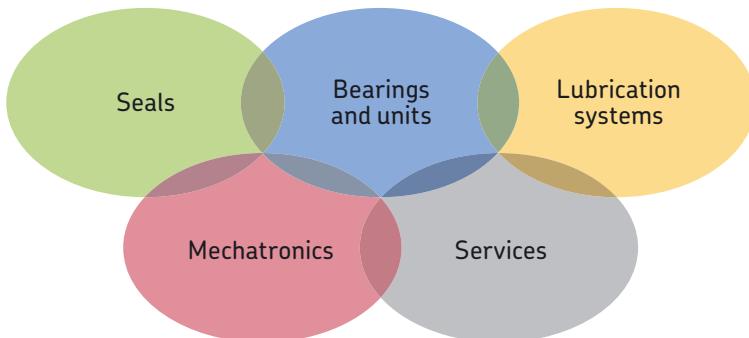



© Airbus – photo: e'm company, H. Goussé

Evolving by-wire technology

SKF has a unique expertise in fast-growing by-wire technology, from fly-by-wire, to drive-by-wire, to work-by-wire. SKF pioneered practical fly-by-wire technology and is a close working partner with all aerospace industry leaders. As an example, virtually all aircraft of the Airbus design use SKF by-wire systems for cockpit flight control.



SKF is also a leader in automotive by-wire technology, and has partnered with automotive engineers to develop two concept cars, which employ SKF mechatronics for steering and braking. Further by-wire development has led SKF to produce an all-electric forklift truck, which uses mechatronics rather than hydraulics for all controls.



Harnessing wind power

The growing industry of wind-generated electric power provides a source of clean, green electricity. SKF is working closely with global industry leaders to develop efficient and trouble-free turbines, providing a wide range of large, highly specialized bearings and condition monitoring systems to extend equipment life of wind farms located in even the most remote and inhospitable environments.



Working in extreme environments

In frigid winters, especially in northern countries, extreme sub-zero temperatures can cause bearings in railway axleboxes to seize due to lubrication starvation. SKF created a new family of synthetic lubricants formulated to retain their lubrication viscosity even at these extreme temperatures. SKF knowledge enables manufacturers and end user customers to overcome the performance issues resulting from extreme temperatures, whether hot or cold. For example, SKF products are at work in diverse environments such as baking ovens and instant freezing in food processing plants



Developing a cleaner cleaner

The electric motor and its bearings are the heart of many household appliances. SKF works closely with appliance manufacturers to improve their products' performance, cut costs, reduce weight, and reduce energy consumption. A recent example of this cooperation is a new generation of vacuum cleaners with substantially more suction. SKF knowledge in the area of small bearing technology is also applied to manufacturers of power tools and office equipment.



Maintaining a 350 km/h R&D lab

In addition to SKF's renowned research and development facilities in Europe and the United States, Formula One car racing provides a unique environment for SKF to push the limits of bearing technology. For over 50 years, SKF products, engineering and knowledge have helped make Scuderia Ferrari a formidable force in F1 racing. (The average racing Ferrari utilizes more than 150 SKF components.) Lessons learned here are applied to the products we provide to automakers and the aftermarket worldwide.




Delivering Asset Efficiency Optimization

Through SKF Reliability Systems, SKF provides a comprehensive range of asset efficiency products and services, from condition monitoring hardware and software to maintenance strategies, engineering assistance and machine reliability programmes. To optimize efficiency and boost productivity, some industrial facilities opt for an Integrated Maintenance Solution, in which SKF delivers all services under one fixed-fee, performance-based contract.



Planning for sustainable growth

By their very nature, bearings make a positive contribution to the natural environment, enabling machinery to operate more efficiently, consume less power, and require less lubrication. By raising the performance bar for our own products, SKF is enabling a new generation of high-efficiency products and equipment. With an eye to the future and the world we will leave to our children, the SKF Group policy on environment, health and safety, as well as the manufacturing techniques, are planned and implemented to help protect and preserve the earth's limited natural resources. We remain committed to sustainable, environmentally responsible growth.

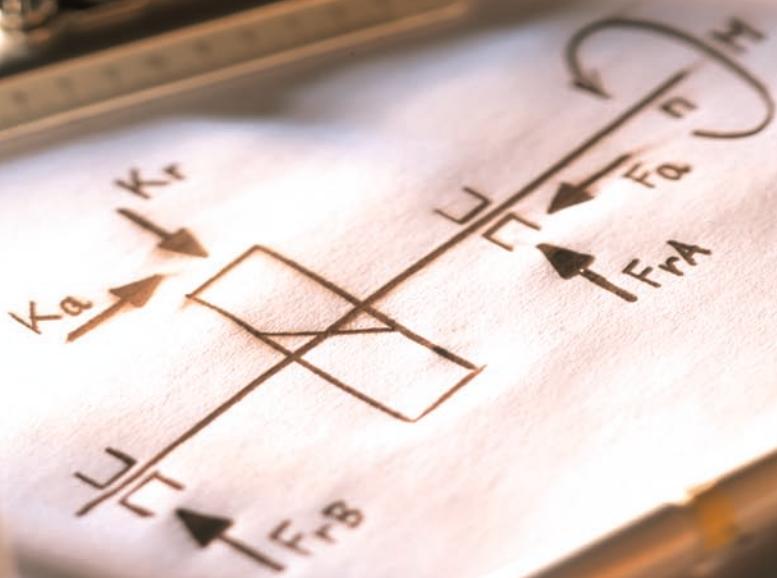

Principles of selection and application

Designs	16
Selection of Y-bearing unit type	24
Selection of Y-bearing unit size	30
Speeds	38
Design of Y-bearing arrangements	40
Lubrication and maintenance	48
Mounting instructions	52
Mounting instructions for Y-bearing plummer block units	
with a composite (Y-TECH) or cast housing and grub screws	56
with a cast housing and an eccentric locking collar.....	57
with a cast housing and an adapter sleeve.....	58
with a pressed steel housing and grub screws.....	60
with a pressed steel housing and an eccentric locking collar	62
Mounting instructions for flanged Y-bearing units	
with a composite (Y-TECH) or cast housing and grub screws	64
with a composite (Y-TECH) or cast housing and an eccentric locking collar.....	65
with a cast housing and an adapter sleeve.....	66
with a pressed steel housing and grub screws.....	68
with a pressed steel housing and an eccentric locking collar	70
Mounting instructions for Y-bearing take-up units	
with a cast housing and grub screws.....	72
with a cast housing and an eccentric locking collar.....	73
Storing Y-bearings and Y-bearing units	74
Designation systems	75

Designs

Conventional SKF ball bearing units are referred to as Y-bearing units. These units consist of:

- an insert bearing (a single row deep groove ball bearing) with a convex spheroid outside diameter
- a housing, which has a correspondingly spheroid but concave bore

Y-bearing units can accommodate moderate initial misalignment, but normally do not permit axial displacement. They are ready-to-mount, ready-to-use units (→ **fig. 1**) and available as:

- Y-bearing plummer block units
- Flanged Y-bearing units
- Y-bearing take-up units

The housings are available in:

- composite material (→ **fig. 2**)
- grey cast iron (→ **fig. 3**)
- sheet steel (→ **fig. 4**)

SKFY-bearing units provide designers with considerable freedom of choice so that compromises can be avoided. Numerous standard series Y-bearing units are available (→ tables on pages 20 to 23). The tables list Y-bearings and Y-bearing housings and their possible combinations to units. For information about more specialized Y-bearing units, refer to the chapter *Engineered Y-bearing units* starting on **page 247**.

Fig. 1



Fig. 2



Because of their versatility and cost effectiveness, Y-bearing units are typically found in the following applications: agricultural machinery, construction equipment, conveyor systems, textile machines and fans as well as in machines for food and beverage processing and packaging.

Bearing terminology

For a better understanding of the information in this catalog, see the next two pages for frequently used bearing terms and their definitions for the following products:

- Y-bearings
- Y-bearing plummer block units
- Flanged Y-bearing units
- Y-bearing take-up units

Essentially, these terms are in accordance with those in the following ISO standards:

- ISO 3228:1993 *Rolling bearings – Cast and pressed housings for insert bearings*
- ISO 9628:2006 *Rolling bearings – Insert bearings and eccentric locking collars*

A detailed collection of bearing specific terms and definitions are also listed in ISO 5593:1997 *Rolling bearings – Vocabulary*.

Fig. 3



Fig. 4




Designs

Y-bearings


Insert bearings, wide inner ring bearings
(→ fig. 5)

- 1 Outer ring
- 2 Sphered outer surface
- 3 Lubrication hole
- 4 Inner ring
- 5 Bore
- 6 Cage
- 7 Ball
- 8 Integral seal
- 9 Flinger
- 10 Eccentric locking collar
- 11 Grub (set) screw


Fig. 5

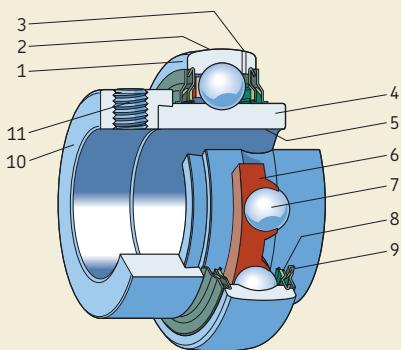


Inner ring with an eccentric locking collar



Inner ring with two grub screws




Inner ring with a tapered bore
(on an adapter sleeve)




Inner ring of a standard deep
groove ball bearing


Fig. 6

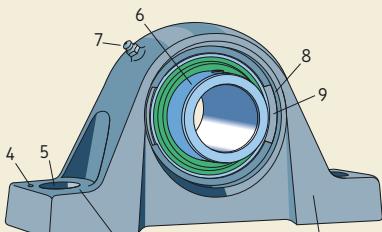

a

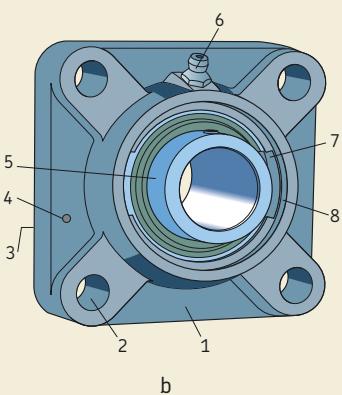

b



c

Y-bearing units

Mounted ball bearing, unit ball

Y-bearing plummer (pillow) block unit (\rightarrow fig. 6a)

- 1 Y-bearing plummer block housing of grey cast iron
- 2 Housing base
- 3 Housing support face
- 4 Cast dimple for dowel pin
- 5 Attachment bolt hole
- 6 Y-bearing
- 7 Grease fitting
- 8 Recess for end cover
- 9 Filling slot for Y-bearing

Flanged Y-bearing unit (\rightarrow fig. 6b)

- 1 Square flanged housing of grey cast iron
- 2 Attachment bolt hole
- 3 Back of flanged housing with or without centring recess
- 4 Cast dimple for dowel pin
- 5 Y-bearing
- 6 Grease fitting
- 7 Filling slot for Y-bearing
- 8 Recess for end cover




Y-bearing take-up unit (\rightarrow fig. 6c)

- 1 Take-up housing of grey cast iron
- 2 Grease fitting
- 3 Y-bearing
- 4 Piloting groove
- 5 Recess for end cover
- 6 Receiving opening for adjustment screw location
- 7 Centre bore for adjustment screw
- 8 Filling slot for Y-bearing

Designs

Y-bearing unit	Composite housings			Cast housings		
	SYK 5(00)	FYK 5(00)	FYTBK 5(00)	SY (500)	SYJ 5(00)	SYH 5(00)
Y-bearings	SYK 5(00)	FYK 5(00)	FYTBK 5(00)	SY (500)	SYJ 5(00)	SYH 5(00)
YAR 2-2F	SYK .. TF 20–40 mm	FYK .. TF 20–40 mm $\frac{3}{4}$ – $1\frac{1}{2}$ in. ¹⁾	FYTBK .. TF 20–35 mm $\frac{3}{4}$ – $1\frac{1}{4}$ in. ¹⁾	SY .. TF 12–65 mm $\frac{1}{2}$ – $2\frac{15}{16}$ in.	SYJ .. TF 20–100 mm $\frac{3}{4}$ – $2\frac{1}{2}$ in.	SYH .. TF $\frac{1}{2}$ – $2\frac{7}{16}$ in.
YAR 2-2RF	SYK .. TR 20–40 mm	FYK .. TR 20–40 mm $\frac{3}{4}$ – $1\frac{1}{2}$ in. ¹⁾	FYTBK .. TR 20–35 mm $\frac{3}{4}$ – $1\frac{1}{4}$ in. ¹⁾	SY .. TR 20–60 mm $\frac{3}{4}$ – $2\frac{1}{2}$ in. ¹⁾	20–65 mm ¹⁾ $\frac{3}{4}$ – $2\frac{1}{2}$ in. ¹⁾	–
YAR 2-2RF/HV	20–40 mm ¹⁾ $\frac{3}{4}$ – $1\frac{1}{2}$ in. ¹⁾	20–40 mm ¹⁾ $\frac{3}{4}$ – $1\frac{1}{2}$ in. ¹⁾	20–35 mm ¹⁾ $\frac{3}{4}$ – $1\frac{7}{16}$ in. ¹⁾	20–40 mm ¹⁾ $\frac{3}{4}$ – $1\frac{1}{2}$ in. ¹⁾	20–40 mm ¹⁾ $\frac{3}{4}$ – $1\frac{1}{2}$ in. ¹⁾	–
YAR 2-2RF/VE495	20–40 mm ¹⁾	20–40 mm ¹⁾	20–35 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾	–
YAT 2	20–40 mm ¹⁾	20–40 mm ¹⁾	20–35 mm ¹⁾	17–50 mm ¹⁾	20–50 mm ¹⁾	–
YEL 2-2F	20–40 mm ¹⁾	20–40 mm ¹⁾	20–35 mm ¹⁾	SY .. WF 20–60 mm $\frac{17}{16}$ – $1\frac{15}{16}$ in.	20–60 mm ¹⁾	SYH .. WF $\frac{3}{4}$ – $2\frac{7}{16}$ in.
YEL 2-2RF/VL065	20–40 mm ¹⁾	20–40 mm ¹⁾	20–35 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾	–
YET 2	20–40 mm ¹⁾	20–40 mm ¹⁾ $\frac{3}{4}$ – $1\frac{1}{2}$ in. ¹⁾	20–35 mm ¹⁾ $\frac{3}{4}$ – $1\frac{7}{16}$ in. ¹⁾	SY .. FM 15–60 mm $\frac{3}{4}$ – $1\frac{1}{2}$ in. ¹⁾	20–60 mm ¹⁾ $\frac{3}{4}$ – $1\frac{1}{2}$ in. ¹⁾	SYH .. FM 1–2 in.
YSA 2-2FK on adapter sleeve	20–35 mm ¹⁾ $\frac{3}{4}$ – $1\frac{1}{4}$ in. ¹⁾	20–35 mm ¹⁾ $\frac{3}{4}$ – $1\frac{1}{4}$ in. ¹⁾	20–30 mm ¹⁾ $\frac{3}{4}$ – $1\frac{3}{16}$ in. ¹⁾	20–60 mm ¹⁾ $\frac{3}{4}$ – $2\frac{3}{8}$ in. ¹⁾	SYJ .. KF 20–60 mm $\frac{3}{4}$ – $2\frac{3}{8}$ in. ¹⁾	–
17262(00)	20–40 mm ¹⁾	20–40 mm ¹⁾	20–35 mm ¹⁾	17–60 mm ¹⁾	20–60 mm ¹⁾	–

1) Parts must be ordered separately.




	Cast housings				
					
Y-bearings	SYM 5(00)	SYF 5(00)	SYFJ 5(00)	FY (500)	FYJ 5(00)
YAR 2-2F 	SYM .. TF 1 7/16–3 in.	SYF .. TF 20–50 mm 3/4–1 3/4 in. ¹⁾	SYFJ .. TF 20–50 mm 3/4–1 3/4 in. ¹⁾	FY .. TF 12–65 mm 1 1/2–2 7/16 in.	FYJ .. TF 20–100 mm 3/4–2 1/2 in. ¹⁾
YAR 2-2RF 	–	20–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	FY .. TR 20–60 mm 3/4–2 1/2 in. ¹⁾	20–60 mm ¹⁾ 3/4–2 1/2 in. ¹⁾
YAR 2-2RF/HV 	–	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in.	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YAR 2-2RF/VE495 	–	20–40 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾
YAT 2 	–	20–50 mm ¹⁾	20–50 mm ¹⁾	17–50 mm ¹⁾	20–50 mm ¹⁾
YEL 2-2F 	–	20–50 mm ¹⁾	20–50 mm ¹⁾	FY .. WF 20–60 mm 1–2 7/16 in.	20–50 mm ¹⁾
YEL 2-2RF/VL065 	–	20–40 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾
YET 2 	–	SYF .. FM 20–50 mm 3/4–1 1/2 in. ¹⁾	SYFJ .. FM 20–50 mm 3/4–1 1/2 in. ¹⁾	FY .. FM 15–60 mm 3/4–2 3/16 in. ¹⁾	20–60 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YSA 2-2FK on adapter sleeve 	–	20–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	12–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–60 mm ¹⁾ 3/4–2 3/8 in. ¹⁾	FYJ .. KF 20–60 mm 3/4–2 3/8 in. ¹⁾
17262(00) 	–	20–50 mm ¹⁾	20–50 mm ¹⁾	17–60 mm ¹⁾	20–60 mm ¹⁾

1) Parts must be ordered separately.

Designs

Y-bearing flanged unit	Cast housings				
	FYM 5(00)	FYT 5(00)	FYTB 5(00)	FYTJ (500)	FYC 5(00)
YAR 2-2F	FYM .. TF 1 7/16–3 in.	FYT .. TF 1/2–2 3/16 in.	FYTB .. TF 12–50 mm 3/4–1 3/4 in. ¹⁾	FYTJ .. TF 20–50 mm 3/4–1 3/4 in.	FYC .. TF 20–65 mm 3/4–2 1/2 in. ¹⁾
YAR 2-2RF	–	–	FYTB .. TR 20–50 mm 3/4–1 3/4 in. ¹⁾	20–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–65 mm ¹⁾ 3/4–2 1/2 in. ¹⁾
YAR 2-2RF/HV	–	–	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YAR 2-2RF/VE495	–	–	20–40 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾
YAT 2	–	FYT .. RM 1/2–2 3/16 in.	17–50 mm ¹⁾	20–50 mm ¹⁾	20–50 mm ¹⁾
YEL 2-2F	–	–	FYTB .. WF 20–50 mm	20–50 mm ¹⁾	20–60 mm ¹⁾
YEL 2-2RF/VL065	–	–	20–40 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾
YET 2	–	FYT .. FM 1/2–2 3/16 in.	FYTB .. FM 15–50 mm 3/4–1 1/2 in. ¹⁾	20–50 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YSA 2-2FK on adapter sleeve	–	–	20–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	FYTJ .. KF 20–45 mm 3/4–1 3/4 in.	20–60 mm ¹⁾ 3/4–2 3/8 in. ¹⁾
17262(00)	–	–	17–50 mm ¹⁾	20–50 mm ¹⁾	20–60 mm ¹⁾

1) Parts must be ordered separately.

	Cast housings		Pressed steel housings			
						
Y-bearings	TU 5(00)	TUJ 5(00)	P 40-P 85	PF 40-90	PFD 40-80	PFT 40-80
YAR 2-2F 	TU .. TF 20–55 mm 3/4–2 3/16 in. ¹⁾	TUJ .. TF 20–60 mm 3/4–2 in. ¹⁾	12–45 mm ¹⁾ 1/2–1 3/4 in. ¹⁾	12–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	12–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	12–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YAR 2-2RF 	20–55 mm ¹⁾ 3/4–2 in. ¹⁾	20–60 mm ¹⁾ 3/4–2 in. ¹⁾	12–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–35 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YAR 2-2RF/HV 	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾					
YAR 2-2RF/VE495 	20–40 mm ¹⁾					
YAT 2 	20–50 mm ¹⁾	20–50 mm ¹⁾	17–45 mm ¹⁾ 5/8–1 3/4 in. ¹⁾	17–50 mm ¹⁾ 5/8–1 15/16 in. ¹⁾	17–40 mm ¹⁾ 5/8–1 1/2 in. ¹⁾	17–40 mm ¹⁾ 5/8–1 1/2 in. ¹⁾
YEL 2-2F 	20–55 mm ¹⁾	20–60 mm ¹⁾	12–45 mm ¹⁾ 1/2–1 3/4 in. ¹⁾	20–50 mm ¹⁾ 1/2–1 15/16 in. ¹⁾	20–40 mm ¹⁾ 1/2–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 1/2–1 1/2 in. ¹⁾
YEL 2-2RF/VL065 	20–40 mm ¹⁾					
YET 2 	TU .. FM 20–55 mm 3/4–1 1/2 in. ¹⁾	20–60 mm ¹⁾ 3/4–1 3/2 in. ¹⁾	15–45 mm ¹⁾ 1/2–1 3/4 in. ¹⁾	15–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	15–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	15–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YSA 2-2FK on adapter sleeve 	20–50 mm ¹⁾ 3/4–2 in. ¹⁾	20–55 mm ¹⁾ 3/4–2 1/8 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–35 mm ¹⁾ 3/4–1 1/4 in. ¹⁾	20–35 mm ¹⁾ 3/4–1 3/4 in. ¹⁾
17262(00) 	20–55 mm ¹⁾	20–60 mm ¹⁾	17–45 mm ¹⁾	17–50 mm ¹⁾	17–40 mm ¹⁾	17–40 mm ¹⁾

¹⁾ Parts must be ordered separately.

Selection of Y-bearing unit type

The SKF Y-bearing unit assortment is extensive. It includes three designs with a choice of three different materials for the housing and a variety of Y-bearings that can be locked onto the shaft in very different ways. Because of their design, each Y-bearing unit exhibits characteristic features that make it more or less suitable for a specific application.

For example, Y-bearing units with a pressed steel housing are not capable of supporting heavy loads, can only run at moderate speeds and can not be relubricated. However, they are economical and easy to mount. On the other hand, housings made of grey cast iron can withstand significantly heavier radial, axial and shock loads. In addition, cast housings have a grease fitting for relubrication, making them a good choice for applications with somewhat higher speeds.


Since, in many cases, several factors have to be considered when selecting a suitable Y-bearing unit, there is no way to provide a list of general rules. However, important factors that should be considered include:

- location on the shaft
- loads
- seals
- permissible operating temperatures
- speeds

Keep in mind that the total cost of a bearing arrangement and inventory considerations could also influence the final choice.

Other important criteria for designing a bearing arrangement, such as load carrying capacity and rating life, lubrication, etc., will be dealt with in detail in the corresponding chapters.

Fig. 1

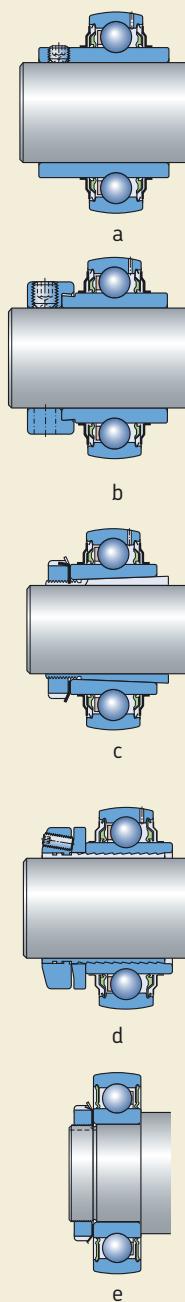

Locating on the shaft

There is a choice of five different methods (→ fig. 1) by which an SKF Y-bearing unit can be located onto the shaft:

- **Grub screws (a).** This method enables very easy mounting and dismounting, even if space is limited. This locking method is typically used in applications where the shaft alternates direction of rotation.
- **Eccentric locking collar (b).** This locking method is typically used for applications where the shaft rotates in one direction only. It can be used for alternating directions when loads and speeds are low.
- **Adapter sleeve locking (c).** This method enables a concentric locking of the Y-bearing unit on the shaft and is appropriate for alternating as well as constant direction of rotation.
- **SKF ConCentra locking (d).** This method enables true concentric locking on the shaft. It is appropriate for alternating, as well as constant direction of rotation.
- **Interference fit (e).** The use of an interference fit is only available for Y-bearings in the 17262(00)-2RS1 and 17263(00)-2RS1 series. These bearings and the required housings have to be ordered separately.

Loads

The magnitude of the load is the factor that usually determines the size of the Y-bearing unit to be used. Generally, units with housings made from grey cast iron or composite material can withstand heavier loads than units with pressed sheet steel housings. Magnitude of load is defined as:

- $P \leq 0,02 C$ – very light load
- $0,02 C < P \leq 0,035 C$ – light load
- $0,035 C < P \leq 0,05 C$ – moderate load
- $0,05 C < P \leq 0,1 C$ – normal load
- $P > 0,1 C$ – heavy load

Radial loads

In applications where normal to heavy loads occur, only Y-bearing units with housings made from grey cast iron or composite material should be used. These units are able to withstand the same dynamic and static loads as their insert bearings and are less sensitive to shock loads (\rightarrow fig. 2a).

Y-bearing units with a pressed steel housing are designed to withstand light to moderate loads and are not able to accommodate shock loads (\rightarrow fig. 2b).

Axial loads

The axial load carrying capacity of a Y-bearing depends not as much on its internal design as on the way it is locked onto the shaft (\rightarrow fig. 2c) as described in the chapter *Axial load carrying ability, page 34*. In general, Y-bearing units with housings made from grey cast iron or composite material are more suitable for heavier or alternating axial loads.

Y-bearing units with a pressed sheet steel housing are only intended for light axial loads, in particular the plummer block units incorporating a rubber seating ring (\rightarrow fig. 2d).

Fig. 2

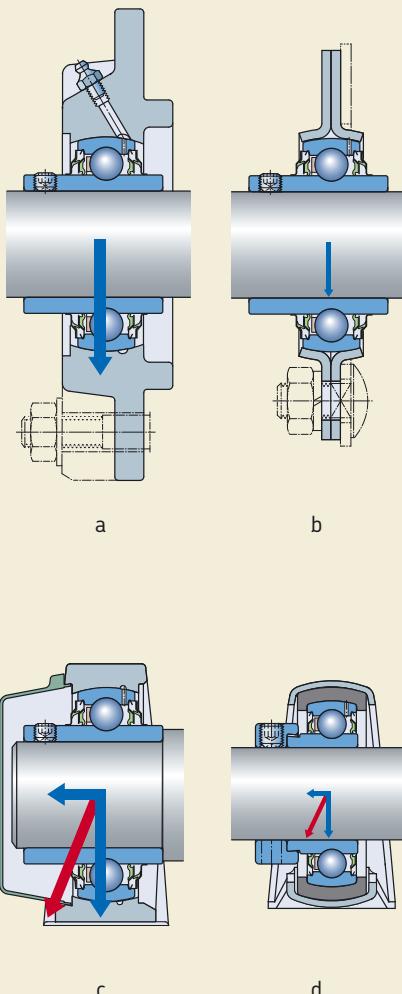


Fig. 3

Seals


The factors that influence the choice of the most appropriate sealing method include:

- the peripheral speed at the sealing counterface
- the friction in the seal and the resulting temperature increase
- the operating environment, e.g. moisture, dust or coarse contaminants
- the requirements regarding efficiency


The standard integral seal used in SKF Y-bearing units provides good protection against moisture and contaminants and also provides reliable retention of the lubricant (→ fig. 3a). The same applies to RS1 contact seals that are integral to Y-bearings with a normal inner ring in the 17262(00)-2RS1 and 17263(00)-2RS1 series (→ fig. 3b).

For more contaminated conditions, Y-bearing units fitted with plain steel flingers outside the integral seal should be used (→ fig. 3c). The flingers have an interference fit on the inner ring and considerably enhance the sealing effect without increasing friction.


Where operating conditions are extremely contaminated and long service life is required, Y-bearing units with the highly efficient multiple seal are recommended. Here, the sealing efficiency of the standard integral seal is reinforced by a steel flinger with a vulcanized sealing lip (→ fig. 3d).




a



b



c



d

Permissible operating temperatures

The permissible operating temperatures for a Y-bearing unit are determined primarily by the bearing, the cage material, the seal material(s) and the grease with which it is lubricated.

The temperature ranges for the greases are:

- -30 to +120 °C for all standard Y-bearings and Y-bearing units that are filled with a grease that has a lithium-calcium thickener¹⁾
- -45 to +150 °C for HV and VE495 Y-bearing variants and for NTH and NTR unit variants that are filled with a food-grade grease²⁾
- -20 to +140 °C for Y-bearings with a hexagonal bore in the YHB 2 and YHC 2 series that are filled with a grease that has a lithium-complex soap thickener³⁾ (designation suffix VT357)
- 40 to 55 °C for maintenance-free operation at moderate loads ($P \leq 0,05 C$) and speeds

All standard Y-bearings are fitted with an injection moulded snap-type cage of glass fibre reinforced polyamide 6,6. These cages exhibit excellent performance characteristics in a variety of applications where operating temperatures do not exceed 120 °C.

Contact seals can be used at operating temperatures between -30 and +100 °C. Temperatures up to 120 °C are also possible for brief periods.

For operating temperatures exceeding the limits stated above, Y-bearing units for high temperatures are available from SKF. For additional information about these units, refer to the section *Y-bearing units for extreme temperatures*, starting on **page 250**.

¹⁾ The temperature range for reliable operation in accordance with the "SKF traffic light concept" is between 10 and 120 °C.

²⁾ The temperature range for reliable operation in accordance with the "SKF traffic light concept" is between 20 and 150 °C.

³⁾ The temperature range for reliable operation in accordance with the "SKF traffic light concept" is between 50 and 140 °C.

Speeds


The speed at which a Y-bearing or a Y-bearing unit can operate depends mainly on:

- the method used to attach it to the shaft
- the sealing arrangement

For Y-bearings that are locked onto a shaft with grub screws or an eccentric locking collar, the permissible speed of the bearing is determined by its fit on the shaft. The looser the fit, the lower the speed.

If a Y-bearing is mounted on an adapter sleeve, with an interference fit (bearings in the 17262(00) or 17263(00) series), or with SKF ConCentra locking, the permissible speed is much higher than if another locating method is used. Their concentric fit also provides a low vibration level and quiet running (→ chapter *Speeds*, starting on [page 38](#)).

Because of the relubrication requirements in applications with relatively high speeds (→ chapter *Lubrication and maintenance*, starting on [page 48](#)), SKF recommends using Y-bearing units that can be relubricated.

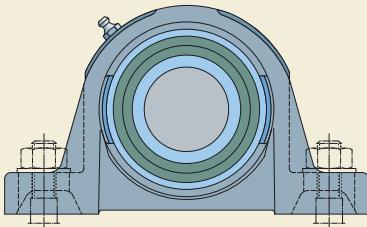

Application note

Because of their special properties, SKF Y-bearing units are used in applications in virtually every industry. If however, they are to be used in an application where health, safety, or the environment is at risk, the SKF application engineering service should be contacted during the design phase.

This is also true for applications with relatively high speeds and where machine downtime can cause significant problems.



Selection of Y-bearing unit size

Load carrying ability and life

The size of a Y-bearing or Y-bearing unit required for a specific arrangement is determined by the loads that will occur in the application and the required life needed for the application. Variables known as load ratings are used in bearing calculations as a measure of the load carrying ability: the basic dynamic load rating C and the basic static load rating C_0 . The basic dynamic load rating is based on specifications determined in ISO 281:2007 while the basic static load rating is based on specifications determined in ISO 76:2006.

Selecting the bearing unit size using life equations

To select a Y-bearing or a Y-bearing unit size, the basic rating life is typically calculated in accordance with ISO 281:2007. The equation for ball bearings is

$$L_{10} = \left(\frac{C}{P} \right)^3$$

If speed is constant, the basic rating life expressed in operating hours can be obtained using

$$L_{10h} = \frac{1\,000\,000}{60n} \left(\frac{C}{P} \right)^3$$

or

$$L_{10h} = \frac{1\,000\,000}{60n} L_{10}$$

where

L_{10} = basic rating life (at 90% reliability),
millions of revolutions

L_{10h} = basic rating life (at 90% reliability),
operating hours

C = basic dynamic load rating, kN

P = equivalent dynamic bearing load, kN

n = rotational speed, r/min

This method is usually adequate for selecting the size of Y-bearings or Y-bearing units, as it is based on experience. If reference experience regarding requisite life and operational reliability is not available, the values provided in **table 1** for the basic rating life L_{10h} can be used as guidelines.

To fully exploit the life of a Y-bearing or a Y-bearing unit, the modified life equation in accordance with ISO 281:2007 should be used to calculate the SKF rating life.

SKF rating life

In the SKF rating life equation, the stresses resulting from external loads are considered, together with the stresses caused by the surface topography, lubrication and kinematics of the rolling contact surfaces. Taking the influence of this combined stress system into account provides a better prediction of the actual performance of the Y-bearing or Y-bearing unit in a particular application.

For additional information about the SKF rating life and its calculation refer to the:

- *SKF General Catalogue*
- *SKF Interactive Engineering Catalogue*
available online at www.skf.com

The SKF Interactive Engineering Catalogue allows different bearing lives to be calculated online.

Table 1

Type of machine	Requisite basic rating life L_{10h} operating hours
Machines used for short periods or intermittently	
Agricultural and ancillary transport equipment	1 000 to 2 000
Other agricultural equipment	4 000 to 8 000
Machines used 8 hours per day but not always fully utilized	
Belt conveyors	12 000 to 20 000
Machines used 8 hours per day and fully utilized	
Light duty fans, textile machinery	20 000 to 30 000

Equivalent dynamic bearing load

The equivalent dynamic bearing load is defined as that hypothetical radial load, constant in magnitude and direction, which, if applied, would have the same influence on bearing life as the actual load to which the bearing is subjected (→ fig. 1).

If the bearing load F is constant in magnitude and direction and acts radially, then $P = F$ and the load can be inserted directly into the life equation. In all other cases, the equivalent dynamic bearing load must be calculated.

Constant bearing load

Y-bearings and Y-bearing units are often subjected to simultaneously acting radial and axial loads. If the resultant load is constant in magnitude and direction, the equivalent dynamic bearing load P can be obtained from the general equations

$$\begin{aligned} P &= F_r && \text{when } F_a/F_r \leq e \\ P &= X F_r + Y F_a && \text{when } F_a/F_r > e \end{aligned}$$

where

P = equivalent dynamic bearing load, kN

F_r = actual radial bearing load, kN

F_a = actual axial bearing load, kN

X = radial load factor for the bearing

Y = axial load factor for the bearing

e = limiting value for F_a/F_r

and with reference to tables 2 and 3

C_0 = basic static load rating, kN

f_0 = bearing-dependent calculation factor

The limiting value e and the load factors X and Y required to calculate the equivalent bearing load for Y-bearings and Y-bearing units can be found in table 2. As for deep groove ball bearings, it depends on the value of the relative thrust load $f_0 F_a/C_0$.

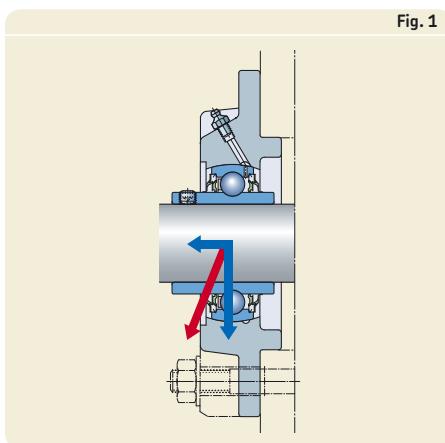


Fig. 1

Table 2

Calculation factors

Relative load $f_0 F_a/C_0$	Y-bearing series			17262(00), 17263(00)		
	e	X	Y	e	X	Y
0,172	0,29	0,46	1,88	0,19	0,56	2,30
0,345	0,32	0,46	1,71	0,22	0,56	1,99
0,689	0,36	0,46	1,52	0,26	0,56	1,71
1,03	0,38	0,46	1,41	0,28	0,56	1,55
1,38	0,40	0,46	1,34	0,30	0,56	1,45
2,07	0,44	0,46	1,23	0,34	0,56	1,31
3,45	0,49	0,46	1,10	0,38	0,56	1,15
5,17	0,54	0,46	1,01	0,42	0,56	1,04
6,89	0,54	0,46	1,00	0,44	0,56	1,00


Table 3

Calculation factor f_0

Y-bearing series (sizes)	Factor f_0
YAT, YAR, YET, YEL, YSA, YSP	
203 – 204	13
205 – 212	14
213 – 218	15
220	14
17262(00)	
03 – 04	13
05 – 12	14
17263(00)	
05	12
06 – 10	13

Diagram 1

Mean load within a duty interval

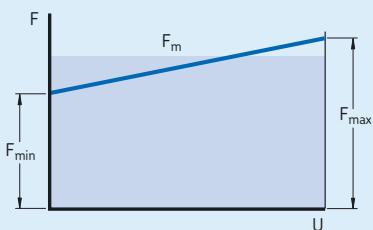

Fluctuating bearing load

In applications where the load varies over time, both in magnitude and direction, bearing life cannot be calculated without first calculating the equivalent load related to the variable (or fluctuating) load conditions. To do this, refer to the section *Life calculation with variable operating conditions* in the *SKF General Catalogue* or online in the *SKF Interactive Engineering Catalogue* at www.skf.com.


Mean load within a duty interval

Within each loading interval, the operating conditions can vary slightly from the nominal value. Assuming that the operating conditions, e.g. speed and load direction, are fairly constant and the magnitude of the load constantly varies between a minimum value F_{\min} and a maximum value F_{\max} (→ **diagram 1**), the mean load can be obtained from

$$F_m = \frac{F_{\min} + 2 F_{\max}}{3}$$

Diagram 2

Rotating load




Rotating load

If, as illustrated in **diagram 2**, the load on the bearing consists of a load F_1 which is constant in magnitude and direction (e.g. the weight of a rotor) and a rotating constant load F_2 (e.g. an unbalanced load), the mean load can be obtained from

$$F_m = f_m (F_1 + F_2)$$

Diagram 3

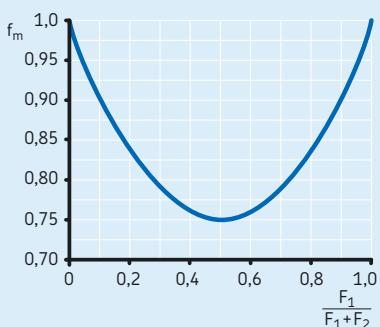

Values for the factor f_m can be obtained from **diagram 3**.

Dynamic bearing loads

When determining additional, external dynamic forces, e.g. an unbalanced condition, it might be necessary to rely on estimates based on experience gained with similar machines or bearing arrangements.

In belt-driven applications, the effective belt pull (circumferential force), which is dependent on the transmitted torque, must be taken into account. To do this, the belt pull must be multiplied by a factor that is dependent on the type of belt, its preload, tension and any additional dynamic forces. Values are usually published by belt manufacturers. However, should information not be available, the following values can be applied:

- Toothed belts 1,1 to 1,3
- V-belts 1,2 to 2,5
- Flat belts 1,5 to 4,5

The larger values apply when the arc of contact is small, for heavy or shock-type duty, or where belt tension is high.


Requisite minimum load

If Y-bearings or Y-bearing units are to operate satisfactorily, they must always be subjected to a minimum radial load. A rule of thumb indicates that this load should correspond to $0,01 C_0$.

The importance of imposing this load increases where accelerations in the bearing are high, and where speeds are in the region of 75% or more of the limiting speed quoted in the product tables.

The weight of the components supported by the Y-bearing unit, together with external forces, normally exceed the requisite minimum load.

Fig. 2



Axial load carrying ability

The axial load carrying ability of a Y-bearing or Y-bearing unit depends not so much on its internal design as on the way it is locked onto the shaft.

For Y-bearings and Y-bearing units with grub screws or an eccentric locking collar, the maximum axial load that they can support is approximately 20% of the basic dynamic load rating if an unhardened shaft is used and the grub screws are properly tightened.

When a Y-bearing is mounted on an adapter sleeve, its axial load carrying ability depends on the amount of torque used to tighten the lock nut. If the torque prescribed in **table 2** on **page 55**, is used, the axial load carrying ability will be between 15 and 20% of the basic dynamic load rating.

Where the inner rings are supported by an abutment on the shaft (→ **fig. 2**), the axial load carrying ability depends on the nature of this abutment. Generally, however, the axial load on the bearing should not exceed $0,25 C_0$.

Additional information about the axial load carrying ability of Y-bearing units is provided in the appropriate chapters of this catalog.

Selecting the bearing unit size using the static load carrying capacity

AY-bearing or Y-bearing unit size should be determined on the basis of the static load rating C_0 , instead of bearing life, when one of the following conditions exists:

- The bearing is stationary and subjected to continuous or intermittent (shock) loads.
- The bearing makes slow oscillating or alignment movements under load.
- The bearing rotates under load at a very slow speed ($n < 10 \text{ r/min}$) and is not required to have a long service life. In this case, the life equation for a given equivalent load P would give such a low requisite basic dynamic load rating C that the bearing selected on a life basis would be seriously overloaded in service.
- The bearing rotates and, in addition to the normal operating loads, has to sustain heavy shock loads that act during a fraction of a revolution.

In all these cases, the permissible load for a Y-bearing is determined by the load that will cause permanent deformations to the ball/raceway contacts and is not determined by material fatigue. Heavy loads acting on a stationary or slowly oscillating bearing, or shock loads on a rotating bearing, produce flattened areas on the balls and indentations on the raceways. The indentations may be irregularly spaced around the raceway, or may be evenly spaced at positions corresponding to the spacing of the balls. If the load acts for several revolutions, the deformation will be evenly distributed over the whole raceway.

The extent to which this damage is detrimental to bearing performance depends on the application and the demands placed on the bearing. To prevent or minimize this type of damage, Y-bearing units with a sufficiently high static load carrying capacity should be selected.

When determining the Y-bearing or Y-bearing unit size based on static load carrying capacity, a given safety factor s_0 , which represents the relationship between the basic static load rating C_0 and the equivalent static bearing load P_0 , is used to calculate the requisite basic static load rating.

Selection of Y-bearing unit size

Equivalent static bearing load

An equivalent static bearing load is defined as the hypothetical load which, if applied, would cause the same maximum rolling element load in the bearing as the actual loads. The equivalent static bearing load for Y-bearings and Y-bearing units is obtained from the general equation

$$P_0 = 0,6 F_r + 0,5 F_a$$

where

P_0 = equivalent static bearing load, kN

F_r = actual radial bearing load, kN

F_a = actual axial bearing load, kN

If $P_0 < F_r$ calculate with $P_0 = F_r$

NOTE: When calculating P_0 , the maximum load that can occur should be used and its radial and axial components inserted in the equation above. If a static load acts in different directions on a bearing, the magnitude of these components will change. In these cases, the components of the load giving the largest value of the equivalent static bearing load P_0 should be used.

Requisite static load rating

The requisite basic static load rating C_0 can be determined from

$$C_0 = s_0 P_0$$

where

C_0 = basic static load rating, kN

P_0 = equivalent static bearing load, kN

s_0 = static safety factor

Experience based guideline values of the static safety factor s_0 for Y-bearings and Y-bearing units are provided in **table 4**.

Table 4

Type of operation	Required static safety factor s_0
Normal loads and smooth, vibration-free operation, where noise levels are not specified, and speeds are very low	$\geq 0,5$
Normal loads and smooth, vibration-free operation, where noise levels are normal	≥ 1
Normal loads and high degree of running accuracy, where low noise levels are specified	≥ 2
Pronounced shock loads, very slow or non-rotating bearings	≥ 2

Checking the static load carrying capacity

For dynamically loaded bearings that have been selected based on requisite life, it is advisable, where the equivalent static bearing load P_0 is known, to check that the static load carrying capacity is adequate using

$$s_0 = C_0/P_0$$

If the s_0 value obtained is less than the recommended guideline value (→ **table 4**), then a larger Y-bearing or Y-bearing unit should be selected.

Speeds

The speed at which a Y-bearing or Y-bearing unit can operate depends mainly on the type of seal that is used and the method used to lock the bearing onto the shaft. The permissible operating speed also depends on the shaft tolerance in applications with:

- Y-bearings with grub screws, YAT 2 and YAR 2-2F series
- Y-bearings with an eccentric locking collar, YET 2 and YEL 2-2F series

The higher the figure following the tolerance symbol h, the lower the permissible speed. Guideline values for the limiting speeds are provided in **table 1**.

For bearings with multiple seals (2RF design), the limiting speed is about 60% of the values quoted in **table 1** for bearings mounted on an h6 tolerance shaft. For the following bearings, the limiting speed depends on the seals:


- Y-bearings with a tapered bore on an adapter sleeve, YSA 2-2FK + H 23 series
- Y-bearings with a standard inner ring, 17262(00)-2RS1 and 17263(00)-2RS1 series
- Y-bearings with SKF ConCentra locking, used in SKF ConCentra ball bearing units only

The values for the limiting speed are provided in the product tables and in **table 1** to enable easy comparison.


The limiting speeds for Y-bearings and Y-bearing units for inch shafts are the same as those for the corresponding metric bearing.

Table 1


Limiting speeds for Y-bearings



YAT, YAR



YET, YEL



YSA + H 23



1726...

Bearing size ¹⁾	Limiting speed for Y-bearings in the series YAT 2, YAR 2, YET 2, YEL 2 for shafts machined to tolerance h6 h7 h8 h9 h11					YSA 2 K + H 23	17262(00)	17263(00)	Limiting speed for SKF ConCentra ball bearing units
	—	r/min	—	—	—				
03	9 500	6 000	4 300	1 500	950	—	12 000	—	—
04	8 500	5 300	3 800	1 300	850	—	10 000	—	—
05	7 000	4 500	3 200	1 000	700	7 000	8 500	7 500	7 000
06	6 300	4 000	2 800	900	630	6 300	7 500	6 300	6 300
07	5 300	3 400	2 200	750	530	5 300	6 300	6 000	5 300
08	4 800	3 000	1 900	670	480	4 800	5 600	5 000	4 800
09	4 300	2 600	1 700	600	430	4 300	5 000	4 500	4 300
10	4 000	2 400	1 600	560	400	4 000	4 800	4 300	4 000
11	3 600	2 000	1 400	500	360	3 600	4 300	—	3 600
12	3 400	1 900	1 300	480	340	3 400	4 000	—	3 400
13	3 000	1 700	1 100	430	300	3 000	—	—	3 000
14	2 800	1 600	1 000	400	280	—	—	—	—
15	2 600	1 500	950	380	260	—	—	—	2 600
16	2 400	1 400	900	360	240	—	—	—	—
17	2 200	1 300	850	340	220	—	—	—	—
18	2 000	1 200	800	320	200	—	—	—	—
20	1 900	1 100	750	300	190	—	—	—	—

¹⁾ For example: bearing size 06 includes all bearings based on a Y 206 bearing, such as YAR 206-2F, YAR 206-101-2F, YAR 206-102-2F, YAR 206-103-2F, YAR 206-104-2F

Design of Y-bearing arrangements

Axial displacement

Y-bearing units do not accommodate axial displacement of the shaft and are therefore not normally suitable for non-locating bearing (free unit) arrangements. The distance between bearing positions should therefore be short or the units should be supported by resilient sheet metal support surfaces or walls to prevent them from being subjected to excessive stresses as a result of thermal elongation of the shaft (**→ fig. 1**).

In applications where there are low speeds, light loads, and the distance between the bearing positions is too long or the operating temperatures too high and one bearing position has to accommodate thermal elongation of the shaft, the following arrangement is recommended.

The shaft on the non-locating side should be provided with one or two grooves 120° apart, to engage one of the following:

- grub screws with a finger, e.g. in accordance with ISO 4028:2003, but with fine thread according to **table 1**, secured by a nut and spring washer or star lock washer (**→ fig. 2**)
- flat head screws in accordance with ISO 1580:1994, but with fine thread according to **table 1**, locked with a spring or star lock washer (**→ fig. 3**)

The finger(s) and groove(s) accommodate changes in shaft length and prevent relative rotational movements between the shaft and bearing bore. To help provide trouble-free operation, the ends of the grub screws should be ground and the sliding surfaces in the shaft grooves coated with a lubricant paste.

Fig. 1

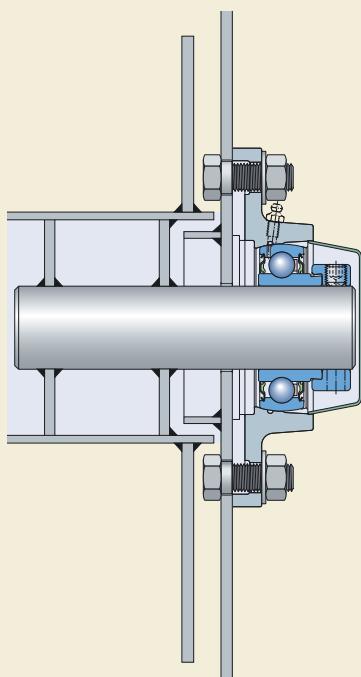


Fig. 3




Fig. 2





Table 1

Threaded holes in the inner ring of YAR and YAT bearings



Bearing size ¹⁾	Outer diameter of inner ring d ₁	Threaded holes YAR bearing with metric bore G ₂	YAR bearing with inch bore G ₂	YAT bearing with metric bore G ₂	YAT bearing with inch bore G ₂
–	mm	–	–	–	–
03	24,2	M 6 × 0,75	#10-32 UNF	M 6 × 0,75	#10-32 UNF
04	28,2	M 6 × 0,75	1/4"-28 UNF	M 6 × 0,75	1/4"-28 UNF
05	33,7	M 6 × 0,75	1/4"-28 UNF	M 6 × 0,75	1/4"-28 UNF
06	39,7	M 6 × 0,75	1/4"-28 UNF	M 6 × 0,75	5/16"-24 UNF
07	46,1	M 6 × 0,75	5/16"-24 UNF	M 6 × 0,75	5/16"-24 UNF
08	51,8	M 8 × 1	5/16"-24 UNF	M 6 × 0,75	5/16"-24 UNF
09	56,8	M 8 × 1	5/16"-24 UNF	M 6 × 0,75	5/16"-24 UNF
10	62,5	M 10 × 1	3/8"-24 UNF	M 8 × 1	3/8"-24 UNF
11	69,1	M 10 × 1	3/8"-24 UNF	–	3/8"-24 UNF
12	75,6	M 10 × 1	3/8"-24 UNF	–	3/8"-24 UNF
13	82,5	M 10 × 1	3/8"-24 UNF	–	–
14	87	M 10 × 1	7/16"-20 UNF	–	–
15	92	M 10 × 1	7/16"-20 UNF	–	3/8"-24 UNF
16	97,4	M 10 × 1	7/16"-20 UNF	–	3/8"-24 UNF
17	105	M 12 × 1,5	–	–	–
18	112,5	M 12 × 1,5	–	–	–
20	124,8	M 12 × 1,5	–	–	–

¹⁾ For example: bearing size 06 includes all bearings based on a Y 206 bearing, such as YAR 206-101-2F, YAR 206-102-2F, YAR 206-2F, YAR 206-103-2F, YAR 206-104-2F

Misalignment

Y-bearing units can accommodate initial misalignment (→ **fig. 4**) of up to:

- 5° when relubrication is not required
- 2° when relubrication is required

Additionally, operational shaft deflections of a few minutes of arc can be permitted.

Y-bearing units with pressed steel housings cannot accommodate misalignment once the attachment bolts have been fully tightened, unless they are equipped with a rubber seating ring (→ **page 45**).

Support surfaces

To maximize the service life of Y-bearing units, the support surfaces must be manufactured with:

- a roughness of $R_a \leq 12,5 \mu\text{m}$
- a flatness (planicity) tolerance to IT7 or IT8

When a heavy load, parallel to the housing base, acts on a Y-bearing unit (→ **fig. 5**) SKF recommends doweling the housing to the support surface. The position and size of the holes for the dowel pins are listed in the relevant product sections.

Fig. 5


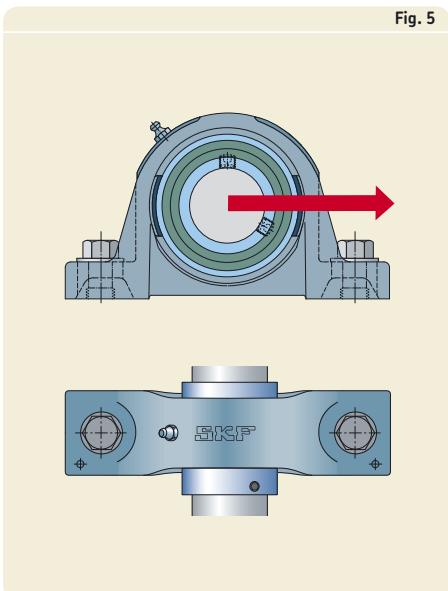


Fig. 4

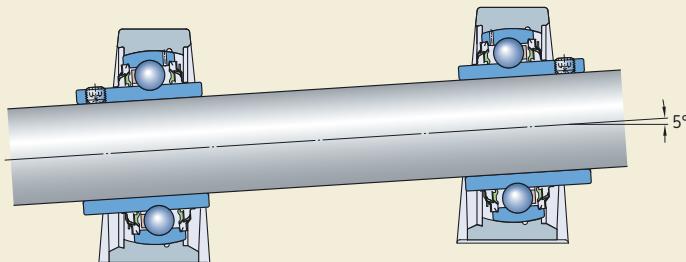

Attaching to the support surface

To attach Y-bearing units to the support surface, SKF recommends using 8.8 class bolts or studs and a washer to ISO 7089:2000 or 7090:2000 and a spring washer. Hexagonal head bolts in accordance with ISO 4014:1999 are appropriate. Alternatively, hexagonal socket head cap screws in accordance with ISO 4762:1988 can be used.

Appropriate fastener sizes are listed in the product tables.

Shaft tolerances

Recommended fits for Y-bearings are listed in **table 2**.

For moderate loads ($0,035 \text{ C} < P \leq 0,05 \text{ C}$) the shaft seats for Y-bearings with grub screws or an eccentric locking collar should be machined to an h7 tolerance. For light loads and low speeds, an h8 shaft tolerance is sufficient and, for very simple applications, h9 to h11 shaft tolerances may be used. **Fig. 6** illustrates the location of the most commonly used ISO shaft tolerance grades for Y-bearings with grub screws or an eccentric locking collar. The values of these ISO tolerances are listed in **table 3a**, page 44.




Table 2

Recommended fits	Operating conditions	Tolerance
Y-bearings with grub screws or an eccentric locking collar $P > 0,05 \text{ C}$ and/or high speeds		h6
$0,035 \text{ C} < P \leq 0,05 \text{ C}$		h7
$0,02 \text{ C} < P \leq 0,035 \text{ C}$ and/or low speeds		h8
Simple bearing arrangements or $P \leq 0,02 \text{ C}$		h9 – h11
Y-bearings with a tapered bore on an adapter sleeve or Y-bearings with SKF ConCentra locking All loads and speeds		h9/IT5
Y-bearings with a standard inner ring $P > 0,035 \text{ C}$ Shaft diameter $\leq 17 \text{ mm}$ Shaft diameter $\geq 20 \text{ mm}$		j5 k5
$P \leq 0,035 \text{ C}$ Shaft diameter $\geq 20 \text{ mm}$		j6

Design of Y-bearing arrangements

Table 3b

ISO shaft tolerances for Y-bearings with a standard inner ring

Shaft diameter		Deviations of shaft diameter						
d		j5		j6		k5		
over	incl.	Deviation	high	low	high	low	high	low
mm		μm						
10	18	+5	-3	+8	-3	+9	+1	
18	30	+5	-4	+9	-4	+11	+2	
30	50	+6	-5	+11	-5	+13	+2	
50	80	+6	-7	+12	-7	+15	+2	

For Y-bearings on an adapter sleeve or Y-bearings with SKF ConCentra locking, a shaft seat machined to h9/IT5 tolerance is adequate. The values for h9 ISO tolerances are listed in **table 3a**.

For Y-bearings with a standard inner ring, the same recommendations apply as for standard deep groove ball bearings (→ **table 2, page 43**). The values of these ISO tolerances are listed in **table 3b**.

Table 3a

ISO shaft tolerances for Y-bearings, except for Y-bearings with a standard inner ring

Shaft diameter		Deviations of shaft diameter												
d		h6		h7		h8		h9		h10		h11		
over	incl.	Deviation	high	low										
mm		μm												
10	18	0	-11	0	-18	0	-27	0	-43	0	-70	0	-110	
18	30	0	-13	0	-21	0	-33	0	-52	0	-84	0	-130	
30	50	0	-16	0	-25	0	-39	0	-62	0	-100	0	-160	
50	80	0	-19	0	-30	0	-46	0	-74	0	-120	0	-190	
80	120	0	-22	0	-35	0	-54	0	-87	0	-140	0	-220	

Rubber seating rings

Rubber seating rings in the RIS 2 series (→ fig. 7) are primarily intended to “cushion” Y-bearings in pressed steel plummer block housings. Located between the bearing outer ring and housing bore, they dampen vibration and noise (→ fig. 8) and enable the bearings to be displaced slightly in their housings to accommodate small shaft elongation or misalignment.

For some applications, rubber seating rings may be fitted to the Y-bearing outer rings to convert Y-bearings to support rollers, and serve as tyres, and to run quietly and protect the counter surfaces (→ fig. 9).

The seating rings in the RIS 2 series are made from acrylonitrile-butadiene rubber (NBR) and have a convex spheroid outside diameter. The rings can operate at temperatures from –30 to +100 °C.

The product tables for Y-bearing units with a pressed steel plummer block housing are listed with their individual components, e.g. housing, Y-bearing and rubber seating ring.

The designation and the dimensions of rubber seating rings are listed in **table 4**.

Fig. 7



Fig. 8


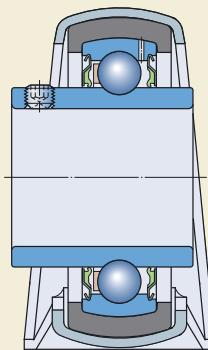



Fig. 9



Design of Y-bearing arrangements

Table 4

Rubber seating rings



Y-bearing Outside diameter D	Rubber seating ring Dimensions					Mass	Designation	Suitable Y-bearing Size
mm	mm	mm	mm	mm	mm	g	-	-
40	47,3	35,5	39,8	12	18	12	RIS 203	03
47	52,3	41,2	46,8	14	19	11,5	RIS 204	04
52	62,3	46,4	51,8	15	20,5	26,5	RIS 205	05
62	72,3	54,6	61,8	18	21,5	31	RIS 206 A	06
72	80,3	63,7	71,8	19	23	32	RIS 207 A	07
80	85,3	70,7	79,7	21	24	26	RIS 208 A	08

End covers

To protect the bearing arrangement at the end of a shaft, and to avoid the possibility of an accident caused by an exposed shaft end, end covers are available for all composite Y-bearing units and for most cast Y-bearing units. The end covers are made from polypropylene (PP), have good resistance to most chemicals and can withstand operating temperatures up to 100 °C. They can be snapped into the recesses provided in the housing bore.

Three different end cover designs are available:


- ECY, a black end cover for shaft ends (**→ fig. 10**)
- ECL, a light-grey end cover for shaft ends for Y-bearing units for the food industry
- ECL B, a cover with a bore for the shaft for Y-bearing units for the food industry

In the product tables, the end covers are listed together with those units that can accommodate them. The designation of the end cover is listed together with the distance A_5 that the end cover protrudes from the housing (**→ fig. 11**).

Fig. 10



Fig. 11



Lubrication and maintenance

Grease fills

Standard SKF Y-bearings and Y-bearing units are filled with a high-quality, long-lasting mineral oil based grease that has a lithium-calcium thickener. This grease has a consistency of 2 on the NLGI scale. This grease is extremely water resistant and will provide long service life even under heavy loads. The properties of this grease are listed in **table 1**.

YAR 2-2RF/HV series Y-bearings made of stainless steel and YAR 2-2RF/VE495 series Y-bearings with zinc coated rings and stainless steel flingers are filled with a special food-grade grease. This grease fulfills the requirements listed in the *Guidelines of section 21 CFR 178.3570* of the FDA (US Food and Drug Administration) regulations. It is approved by the USDA (United States Department of Agriculture) for Category H1 use (occasional contact with food stuffs). This food-grade grease shows very good rust inhibiting properties, good water resistance and anti-wear characteristics as well as high ageing and oxidation resistance. The properties of this grease are listed in **table 1**.

Y-bearings with a square or hexagonal bore are filled with a premium quality grease, which has good water and corrosion resistant properties and provides excellent lubrication at high operating temperatures (designation suffix VT357). The properties of this grease are listed in **table 1**.

Relubrication

Relubrication of Y-bearing units is not required if:

- loads and speeds are moderate
- vibration does not occur
- operating temperatures are between 40 and 55 °C

Y-bearing units with a pressed steel housing are not equipped with a grease fitting and therefore cannot be relubricated.

Relubrication will enable the bearing to realize maximum service life in cases and applications where Y-bearings or Y-bearing units:

- are exposed to high humidity or severe contamination
- have to accommodate heavy loads
- have to operate at high speeds or at temperatures above 55 °C for extended periods

When relubricating, grease should be pumped slowly into the running bearing until fresh grease starts to escape from the seal.

NOTE: Excessive pressure from pumping too quickly may damage the seals.

Detailed information about SKF bearing greases can be found in the catalogue MP3000 *SKF Maintenance and Lubrication Products* or online at www.skf.com.

Relubricating Y-bearing units with cast housings

To relubricate Y-bearing units with cast housings, SKF LGWA 2, LGMT 2 or LGMT 3 greases can be used. Each of these greases is fully compatible with the original grease fill from the factory.

Y-bearing units with a cast housing for inch shafts larger than 1 inch (i.e. units comprising a housings with designation suffix U) are equipped with a grease fitting with a 1/8 NPT thread. All other Y-bearing units with a cast housing are equipped with a grease fitting with a 1/4-28 SAE-LT thread. The hole for the grease fitting has a 1/4-28 UNF thread, which can be changed to G 1/4, using an LAPN 1/4 UNF adapter.

Relubricating Y-bearing units with composite housings

To relubricate Y-bearing units for the food industry, SKF recommends using the food-grade SKF grease LGFP 2.

KC design Y-bearing units are equipped with a stainless steel grease fitting. The grease fitting should not be exchanged.

L design Y-bearing units are equipped with a stainless steel grease fitting with a 1/4-28 UNF thread. The 1/4-28 UNF thread can be changed to G 1/4, using an LAPN 1/4 UNF adapter.

Table 1

Lubricating greases			
Technical specification	Grease fills in standard Y-bearings, standard Y-bearing units	YAR 2-2RF/HV and YAR 2-2RF/VE495 series Y-bearings, Y-bearing units for the food industry	YHB 2-2LS8W/VT357 and YHC 2-2LS8W/VT357 series Y-bearings
Thickener	Lithium-calcium soap	Aluminium-complex soap	Lithium-complex soap
Base oil	Mineral oil	Synthetic hydrocarbon oil	Mineral oil
Colour	Yellowish brown	White	Amber
Temperature range [°C] (continuous operation)	-30 to +120 ¹⁾	-45 to +150 ²⁾	-20 to +140 ³⁾
Kinematic viscosity [mm²/s] of base oil at 40 °C/100 °C	190/15	100/14,4	110/13
Consistency (to NLGI scale)	2	2	3
Other	Long life grease	Fulfils the requirements of the <i>Guidelines of section</i> 21 CFR 178.3570 of the FDA (US Food and Drug Administration) regulations	-

¹⁾ The temperature range for reliable operation in accordance with the SKF traffic light concept is between 10 and 120 °C.

²⁾ The temperature range for reliable operation in accordance with the SKF traffic light concept is between 20 and 150 °C.

³⁾ The temperature range for reliable operation in accordance with the SKF traffic light concept is between 50 and 140 °C.

Relubrication intervals

The relubrication interval t_f can be estimated from **diagram 1** as a function of the rotational speed n (r/min), the bearing mean diameter d_m (\rightarrow **table 2**) and the operating temperature ($^{\circ}\text{C}$).

The recommended intervals correspond to a time when 90% of the bearings are still reliably lubricated, and represent L_{10} grease life. When the L_{10} grease life is equivalent to or higher than the rating life of the Y-bearing, the bearing is considered to be lubricated for life and relubrication is not required.

The intervals obtained from **diagram 1** are valid for Y-bearings and Y-bearing units filled with the standard high quality long lasting mineral oil based grease, as well as for food-grade grease:

- on horizontal shafts
- in stationary machines
- $P \leq 0,05 \text{ C}$

If operating conditions differ, reduce the relubrication intervals obtained from **diagram 1** as follows:

- on vertical shafts by 50%
- at heavier loads, e.g. at $P > 0,10 \text{ C}$, by roughly 50%


In severe, very dirty or damp environments, more frequent relubrication might be necessary. When the operating temperatures are constantly below $40 \text{ }^{\circ}\text{C}$, the grease life is shortened because oil separation is reduced.

Vibration can have a negative influence on grease life too. The extent cannot be quantified exactly, but it can be noticeable if the normal operating temperature increases.

The values for reducing the relubrication intervals are estimates. If in doubt, contact the SKF application engineering service.

In cases where machines and equipment are used for a limited period of time, SKF recommends relubricating each bearing at the end of the operational period, i.e. immediately before being laid up.


Table 2

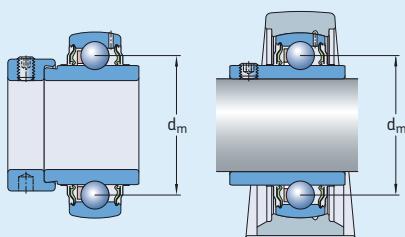Bearing mean diameter d_m Bearing size¹⁾ Bearing mean diameter
 d_m

	mm
03	28,5
04	33,5
05	39
06	46
07	53,5
08	60
09	65
10	70
11	77,5
12	85
13	92,5
14	97,5
15	102,5
16	110
17	117,5
18	126
20	141

¹⁾ For example: bearing size 06 includes all bearings based on a Y 206 bearing, such as YAR 206-101-2F, YAR 206-102-2F, YAR 206-2F, YAR 206-103-2F, YAR 206 104-2F

Diagram 1

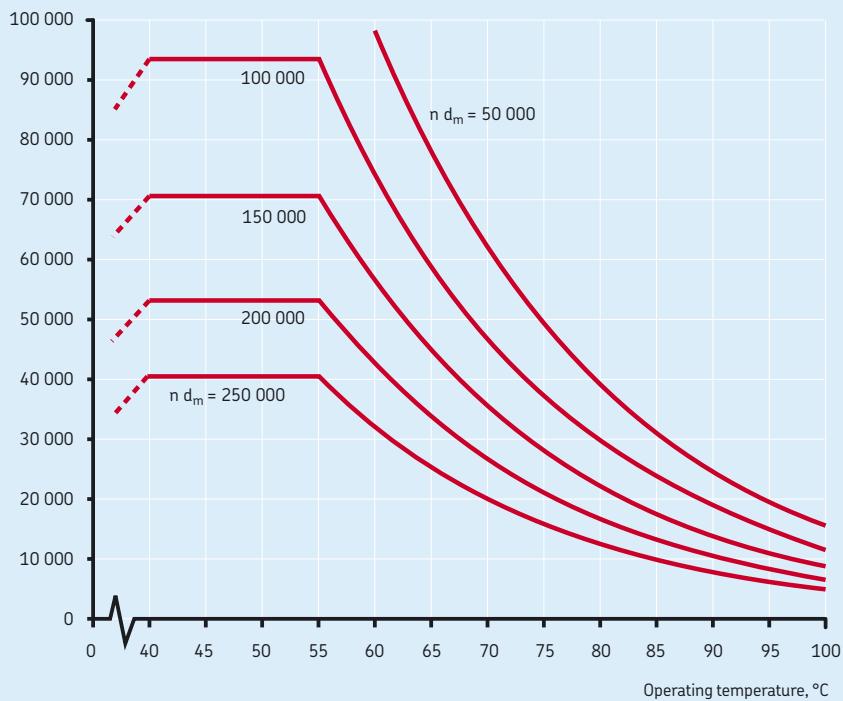Relubrication interval t_r , h

Mounting instructions

Mounting instructions – general

To provide proper bearing performance and prevent premature failure, skill and cleanliness when mounting Y-bearings or Y-bearing units are necessary. As precision components, they should be handled carefully when mounting. It is also important to choose the appropriate method of mounting and to use the correct tools.

The method used for mounting a Y-bearing unit depends on:

- the overall machine design
- the Y-bearing housing design
- the method used to attach the unit to the shaft

NOTE: Failure to carefully follow applicable mounting instructions can result in premature bearing failure or improper performance. For further information, contact the SKF application engineering service.

Detailed mounting instructions can be found on the following pages.

Y-bearings, Y-housings or Y-bearing units should not be removed from their original packaging until immediately before they are mounted.

Before installing a Y-bearing unit, check that the shaft is clean and free of any burrs and that the shaft seat is within tolerance. Also be sure that the support surfaces are clean and free of burrs and that the flatness is within the IT7 tolerance grade and that the roughness $R_a \leq 12,5 \mu\text{m}$.

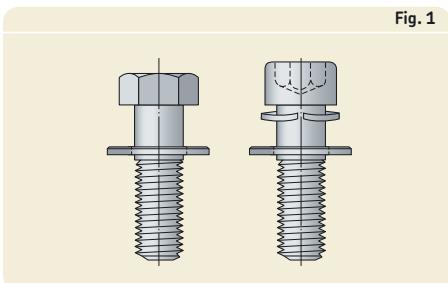


Fig. 1

Tools

To mount or dismount Y-bearing units, the following tools are required:

- a hexagonal key (hex wrench) to tighten or loosen grub (set) screws (\rightarrow **table 1, page 54**)
- a hook spanner to tighten or loosen the lock nut on an adapter sleeve (\rightarrow **table 2, page 55**)
- a hook spanner with a stud to tighten or loosen the eccentric locking collar
- a spanner or hexagonal key to tighten or loosen the fasteners

The hook spanners are part of the comprehensive SKF range of maintenance products. Detailed information can be found in the printed catalogue *SKF Maintenance and Lubrication Products* or online at www.skf.com.

Attaching Y-bearing units to the support base

To reduce vibration and enable heat to dissipate from the unit, the housing must be firmly attached to the support base. To attach Y-bearing units to the support surface, SKF recommends using 8.8 class bolts or studs and a washer to ISO 7089:2000 or 7090:2000 and a spring

washer. Hexagonal head bolts in accordance with ISO 4014:1999 are appropriate. Alternatively, hexagonal socket head cap screws in accordance with ISO 4762:1988 can be used (→ fig. 1).

Assembling units

In cases where the Y-bearing and composite or cast Y-housing are not supplied as a unit, the first step is to assemble the bearing into the housing. To do this, start by removing the locking collar if the bearing has one. Then insert the bearing into the filling slot in the housing bore (→ fig. 2) and with a round piece of wood or pipe, swivel the bearing into position so that the locking device is facing in the same direction as the filling slots (→ fig. 3). When installing standard bearings, make sure that the relubrication hole in the bearing on the side of the locking device does not coincide with the filling slot in the housing, otherwise grease leakage may result (→ fig. 4). When installing stainless steel bearings in KC series housings, make sure that the lubrication groove in the bearing outer ring coincides with the relubrication facility in the housing.


Fig. 2



Fig. 3




Fig. 4

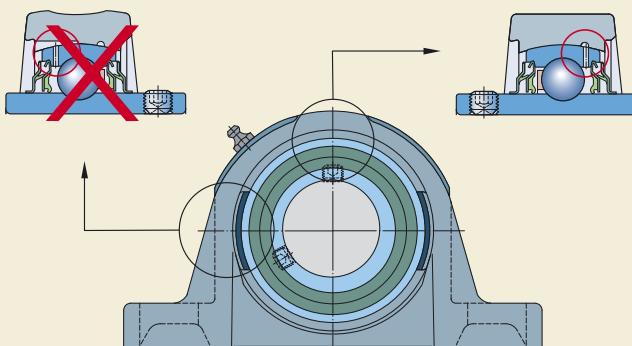

Mounting instructions

Table 1

Hexagonal keys to tighten grub screws in inner rings or eccentric locking collars – sizes and tightening torques

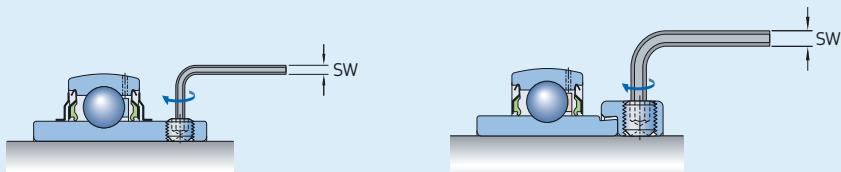

Bearing size ¹⁾	Bearing or unit with metric bore		Bearing or unit with inch bore	
	Hexagonal key size SW	Tightening torque Nm	Hexagonal key size SW	Tightening torque Nm
–	mm	Nm	inch	Nm

Bearings in the YAR series, unit with designation suffix TF, TR, TH, THR, NTH, TR/VE495, NTR/VE495

03	3	4	3/32	4
04	3	4	1/8	4
05	3	4	1/8	4
06	3	4	1/8	4
07	3	4	5/32	6,5
08	4	6,5	5/32	6,5
09	4	6,5	5/32	6,5
10	5	16,5	3/16	16,5
11	5	16,5	3/16	16,5
12	5	16,5	3/16	16,5
13	5	16,5	3/16	16,5
14	5	16,5	7/32	28,5
15	5	16,5	7/32	28,5
16	5	16,5	7/32	28,5
17	6	28,5	–	–
18	6	28,5	–	–
20	6	28,5	–	–

Bearing size ¹⁾	Bearing or unit with metric bore		Bearing or unit with inch bore	
	Hexagonal key size SW	Tightening torque Nm	Hexagonal key size SW	Tightening torque Nm
–	mm	Nm	inch	Nm


Bearings in the YAT series, units with designation suffix RM

03	3	4	3/32	4
04	3	4	1/8	4
05	3	4	1/8	4
06	3	4	5/32	6,5
07	3	4	5/32	6,5
08	3	4	5/32	6,5
09	3	4	5/32	6,5
10	4	6,5	5/32	6,5
11	–	–	3/16	16,5
12	–	–	3/16	16,5
13	–	–	3/16	16,5
14	–	–	3/16	16,5

Bearings in the YET or YEL series, units with designation suffix FM or WF

03	3	4	1/8	4
04	3	4	1/8	4
05	3	4	1/8	4
06	4	6,5	5/32	6,5
07	5	16,5	3/16	16,5
08	5	16,5	3/16	16,5
09	5	16,5	3/16	16,5
10	5	16,5	3/16	16,5
11	5	16,5	7/32	28,5
12	5	16,5	7/32	28,5

¹⁾ For example: bearing size 06 includes all bearings based on a Y 206 bearing, such as YAR 206-101-2F, YAR 206-102-2F, YAR 206-2F, YAR 206-103-2F, YAR 206-104-2F

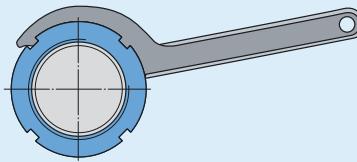Hook spanner size and tightening torque for Y-bearings and Y-bearing units on an adapter sleeve


Designation Y-bearing + adapter sleeve	Shaft diameter <i>d</i>	Hook spanner	Tightening torque min	max
–	mm in	–	Nm	
Bearings in the YSA series				
Units with designation suffix KF				
YSA 205-2FK + HE 2305	–	3/4	HN 5	13
YSA 205-2FK + H 2305	20	–	HN 5	13 17
YSA 206-2FK + HA 2306	–	15/16	HN 6	22
YSA 206-2FK + H 2306	25	–	HN 6	22 28
YSA 206-2FK + HE 2306	–	1	HN 6	22 28
YSA 207-2FK + H 2307	30	–	HN 7	27
YSA 207-2FK + HA 2307	–	1 3/16	HN 7	27 33
YSA 208-2FK + HE 2308	–	1 1/4	HN 8	35
YSA 208-2FK + H 2308	35	–	HN 8	35 45
YSA 209-2FK + HA 2309	–	1 7/16	HN 9	45
YSA 209-2FK + HE 2309	–	1 1/2	HN 9	45 55
YSA 209-2FK + H 2309	40	–	HN 9	45 55
YSA 210-2FK + HS 2310	–	1 5/8	HN 10	55
YSA 210-2FK + HA 2310	–	1 11/16	HN 10	55
YSA 210-2FK + HE 2310	–	1 3/4	HN 10	55
YSA 210-2FK + H 2310	45	–	HN 10	55 65
YSA 211-2FK + HA 2311 B	–	1 15/16	HN 11	65
YSA 211-2FK + H 2311	50	–	HN 11	65
YSA 211-2FK + HE 2311	–	2	HN 11	65 85
YSA 212-2FK + HS 2312	–	2 1/8	HN 12	85
YSA 212-2FK + H 2312	55	–	HN 12	85 115
YSA 213-2FK + HA 2313	–	2 3/16	HN 13	110
YSA 213-2FK + HE 2313	–	2 1/4	HN 13	110 150
YSA 213-2FK + H 2313	60	–	HN 13	110 150
YSA 213-2FK + HS 2313	–	2 3/8	HN 13	110 150

Mounting instructions for Y-bearing plummer block units

with a composite or cast housing and grub
screws

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 Slide the Y-bearing plummer (pillow) block unit onto the shaft with its locking device facing outwards.
- 3 Position the Y-bearing unit on the support surface. Fit the attachment bolts or nuts but do not tighten them.
- 4 Mount the other Y-bearing plummer block unit on the other end of the shaft, following steps 2 and 3.
- 5 Carefully align both Y-bearing units, using the shaft. Fully tighten the attachment bolts or nuts in the housing base.
- 6 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 7 Tighten the grub screws in the inner rings of both units to the tightening torque indicated in **table 1 on page 54** (→ **fig. 1**).
- 8 If applicable, snap the end cover(s) into place.

Fig. 1



Mounting instructions for Y-bearing plummer block units

with a cast housing and an eccentric locking collar



- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 With the eccentric locking collar removed, slide the Y-bearing plummer block unit onto the shaft with the locking device facing outwards.
- 3 Position the Y-bearing unit on the support surface. Fit the attachment bolts or nuts but do not tighten them.
- 4 Mount the other Y-bearing plummer block unit on the other end of the shaft, following steps 2 and 3.
- 5 Carefully align both Y-bearing units, using the shaft. Fully tighten the attachment bolts or nuts in the housing base.
- 6 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 7 Place the eccentric locking collars on the inner ring extension of both Y-bearing units and snug tighten them in the main direction of rotation (→ **fig. 1**).
- 8 Tighten the locking collars to their final position, using a hook spanner with a stud engaging the hole in the circumference of the collar (→ **fig. 2**).
- 9 Tighten the grub screw in the eccentric locking collar of both Y-bearing units (→ **fig. 3**) to the tightening torque indicated in **table 1** on **page 54**.
- 10 If applicable, snap the end cover(s) into place.



Mounting instructions for Y-bearing plummer block units

with a cast housing and an adapter sleeve

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 Determine the position of the adapter sleeve on the shaft (→ **fig. 1**).
- 3 Remove the nut and the locking washer from the adapter sleeve (→ **fig. 2**).
- 4 Wipe the preservative from the bore and outside surface of the sleeve.
- 5 Expand the adapter sleeve slightly by inserting a screwdriver in the slot of the sleeve and slide the adapter sleeve into position on the shaft (→ **fig. 3**).
- 6 Slide the Y-bearing plummer block unit up onto the adapter sleeve with the large end of the tapered bore leading, but do not push it.
- 7 Install the locking washer and screw the lock nut onto the adapter sleeve until the Y-bearing unit is firmly in position on the sleeve.
- 8 Further tighten the lock nut using one of the following:
 - a hook spanner in the HN series to a tightening angle of about 70° (→ **fig. 4**)
 - a TMHN lock nut spanner to a tightening angle of about 70°
 - a torque wrench to the tightening torque indicated in **table 2 on page 55**Make sure that while tightening the nut, the sleeve does not rotate on the shaft.
- 9 Lock the nut in position by bending down a tab on the locking washer in one of the slots provided around the circumference of the nut (→ **fig. 5**).
- 10 Mount the other Y-bearing plummer block unit on the other end of the shaft, following steps 2 through 9.
- 11 Position the Y-bearing units on their support surfaces. Fit the attachment bolts or nuts but do not tighten them.
- 12 Carefully align both Y-bearing units, using the shaft and, if possible, turn it a few times. Then tighten the attachment bolts or nuts.
- 13 If applicable, snap the end cover(s) into place.

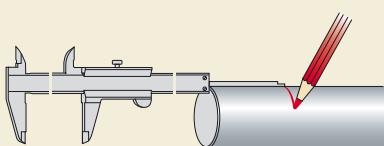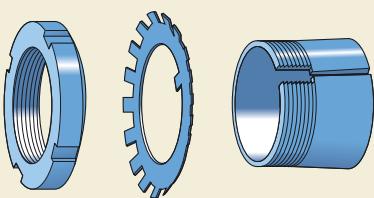Fig. 1**Fig. 2****Fig. 3****Fig. 4****Fig. 5**

Mounting instructions for Y-bearing plummer block units

with a pressed steel housing and grub
screws

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 Slide the Y-bearings with the locking device facing outward onto the shaft – at both ends. Install the rubber seating ring on the outside diameter of the bearing (optional).
- 3 Place the base of each housing on its support surface.
- 4 Place the shaft and Y-bearings into position in each housing base. Then, place the housing caps over the bearings (→ **fig. 1**) and install the attachment bolts or nuts.
- 5 Carefully align both Y-bearing units, using the shaft. Then, tighten the attachment bolts or nuts.
- 6 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 7 Tighten the grub screws in the inner ring of both bearings (→ **fig. 2**) to the tightening torque indicated in **table 1** on **page 54**.

Fig. 1



Fig. 2



Mounting instructions for Y-bearing plummer block units

with a pressed steel housing and
an eccentric locking collar

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 With the eccentric locking collar removed, slide the Y-bearings onto both shaft ends with the locking device facing outwards. Install the rubber seating ring on the outside diameter of the bearing (optional).
- 3 Place the base of each housing on its support surface.
- 4 Place the shaft and Y-bearings into position in each housing base. Then, place the housing caps over the bearings (→ **fig. 1**) and install the attachment bolts or nuts.
- 5 Carefully align both Y-bearing units, using the shaft. Then, tighten the attachment bolts or nuts.
- 6 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 7 Place the eccentric locking collars on the inner ring extension of both Y-bearings and snug tighten them in the main direction of rotation (→ **fig. 2**).
- 8 Tighten the locking collars to their final position, using a hook spanner with a stud engaging the hole in the circumference of the collar (→ **fig. 3**).
- 9 Tighten the grub screw in the eccentric locking collar of both Y-bearings (→ **fig. 4**) to the tightening torque indicated in **table 1** on **page 54**.

Fig. 1



Fig. 2



Fig. 3



Fig. 4



Mounting instructions for flanged Y-bearing units

with a composite (Y-TECH) or cast housing
and grub screws

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 Slide the flanged Y-bearing unit onto the shaft.
- 3 Fasten the Y-bearing unit securely to the machine wall.
- 4 Mount the other flanged Y-bearing unit to the opposite end of the shaft, following steps 2 and 3.
- 5 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 6 Tighten the grub screws on the inner ring of both units (→ **fig. 1**) to the tightening torque indicated in **table 1** on **page 54**.
- 7 If applicable, snap the end cover(s) into place.

Fig. 1



Mounting instructions for flanged Y-bearing units

with a composite (Y-TECH) or cast housing and an eccentric locking collar

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 With the eccentric locking collar removed, slide the flanged Y-bearing unit onto the shaft with the locking device facing outwards.
- 3 Fasten the Y-bearing unit securely to the machine wall.
- 4 Mount the other flanged Y-bearing unit to the opposite end of the shaft, following steps 2 and 3.
- 5 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 6 Place the eccentric locking collars on the inner ring of both Y-bearings and snug tighten them in the main direction of rotation (→ fig. 1).
- 7 Tighten the locking collars to their final position using a hook spanner with a stud engaging the hole in the circumference of the collar (→ fig. 2).
- 8 Tighten the grub screw in the eccentric locking collar of both units (→ fig. 3) to the tightening torque indicated in **table 1** on **page 54**.
- 9 If applicable, snap the end cover(s) into place.



Fig. 2



Fig. 3



Mounting instructions for flanged Y-bearing units

with a cast housing and an adapter sleeve

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 Determine the position of the adapter sleeve on the shaft (→ **fig. 1**). Take into consideration that later during mounting
 - the Y-bearing unit will move axially on the sleeve or vice versa
 - the shaft will move axially against the Y-bearing unit.This is particularly important when mounting the second Y-bearing unit.
- 3 Remove the nut and locking washer from the adapter sleeve (→ **fig. 2**).
- 4 Wipe the preservative from the bore and outside surface.
- 5 Expand the adapter sleeve slightly by inserting a screwdriver in the slot of the sleeve and slide the adapter sleeve into position on the shaft (→ **fig. 3**).
- 6 Slide the Y-bearing unit up onto the adapter sleeve with the large end of the tapered bore leading, but do not push it.
- 7 Fasten the Y-bearing unit securely to the machine wall.
- 8 Install the locking washer and screw the lock nut onto the adapter sleeve until the Y-bearing unit is firmly in position on the sleeve.
- 9 Further tighten the lock nut using one of the following:
 - a hook spanner in the HN series to a tightening angle of about 70° (→ **fig. 4**)
 - a TMHN lock nut spanner to a tightening angle of about 70°
 - a torque wrench to the tightening torque indicated in **table 2 on page 55**Make sure that while tightening the nut, the sleeve does not rotate on the shaft.
- 10 Lock the nut in position by bending down a tab on the locking washer into one of the slots provided around the circumference of the nut (→ **fig. 5**).
- 11 Mount the second Y-bearing unit at the other end of the shaft, following steps 2 through 9.

- 12 Make sure the shaft turns smoothly and the bearings are not jammed in place. If necessary, remove the last Y-bearing unit to be mounted, determine a new installation position for the adapter sleeve on the shaft and mount the Y-bearing unit again.
- 13 If the shaft turns smoothly, secure the Y-bearing unit on the adapter sleeve by bending down a tab on the locking washer into one of the slots provided around the circumference of the nut (→ **fig. 5**).
- 14 If applicable, snap the end cover(s) into place.

Fig. 1

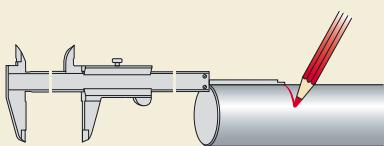


Fig. 2

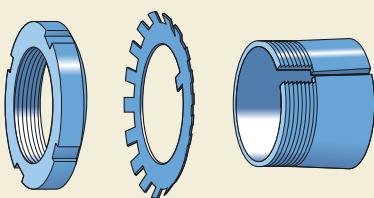


Fig. 3



Fig. 4



Fig. 5



Mounting instructions for flanged Y-bearing units

with a pressed steel housing and grub
screws

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 Place one housing half into position on the machine wall with threaded fasteners (**→ fig. 1**).
- 3 With the locking device facing outward, slide the Y-bearing onto the shaft and into the housing half.
- 4 Place the second housing half into position over the Y-bearing (**→ fig. 2**).
- 5 Fit the threaded fasteners (nuts or bolts), but do not tighten them.
- 6 Mount the Y-bearing unit at the other end of the shaft, following steps 2 through 5.
- 7 Tighten the threaded fasteners holding the flanged units in place.
- 8 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 9 Tighten the grub screws on both units (**→ fig. 3**) to the tightening torque indicated in **table 1 on page 54**.

Fig. 1



Fig. 2



Fig. 3



Mounting instructions for flanged Y-bearing units

with a pressed steel housing and
an eccentric locking collar

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 Place one housing half into position on the machine wall with threaded fasteners (→ fig. 1).
- 3 With the eccentric locking collar removed, slide the Y-bearing onto the shaft and into the housing half with the locking device facing outwards.
- 4 Place the second housing half into position over the Y-bearing (→ fig. 2).
- 5 Fit the threaded fasteners (nuts or bolts), but do not tighten them.
- 6 Mount the other Y-bearing unit at the other end of the shaft, following steps 2 through 5.
- 7 Tighten the threaded fasteners holding the flanged units in place.
- 8 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 9 Place the eccentric locking collars on the inner ring extension of both Y-bearings and snug tighten them in the main direction of rotation (→ fig. 3).
- 10 Tighten the locking collars to their final position using a hook spanner with a stud engaging the hole in the circumference of the collar (→ fig. 4).
- 11 Tighten the grub screw in the eccentric locking collar of both units (→ fig. 5) to the tightening torque indicated in **table 1** on page 54.

Fig. 1**Fig. 2****Fig. 3****Fig. 4****Fig. 5**

Mounting instructions for Y-bearing take-up units

with a cast housing and grub screws

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 Slide the Y-bearing take-up units onto both shaft ends with the locking device facing outward.
- 3 Install the shaft and Y-bearing take-up units into the take-up frames and connect the adjustment screws via the cast hole in the units.
- 4 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 5 Tighten the grub screws on both Y-bearing take-up units to the tightening torque indicated in **table 1 on page 54**.
- 6 If applicable, snap the end cover(s) into place.

Mounting instructions for Y-bearing take-up units

with a cast housing and an eccentric locking collar

- 1 Mount any components that are on the shaft between the two Y-bearing units.
- 2 With the eccentric locking collar removed, slide the Y-bearing take-up units onto both shaft ends with the locking device facing outwards.
- 3 Install the shaft with the Y-bearing take-up units into the take-up frames and connect the adjustment screws via the cast hole in the units.
- 4 Align the shaft in the bearing arrangement axially and – if possible – turn it a few times.
- 5 Place the eccentric locking collars on the inner ring extension of both Y-bearing units and snug tighten them in the main direction of rotation.
- 6 Tighten the locking collars to their final position using a hook spanner with a stud engaging the hole in the circumference of the collar.
- 7 Tighten the grub screw in the eccentric locking collar of both Y-bearing units to the tightening torque indicated in **table 1** on **page 54**.
- 8 If applicable, snap the end cover(s) into place.

Storing Y-bearings and Y-bearing units

Y-bearings and Y-bearing units are normally treated with a rust preventive compound and can be stored in their original unopened package for a number of years. However, they should be kept in a vibration-free, dry environment where the relative humidity does not exceed 60% and the temperature is reasonably constant.

When Y-bearings and Y-bearing units are stored for long periods, they may have a higher initial starting torque than Y-bearings or units recently delivered from the factory. Also, the lubricating properties of the grease may have deteriorated after long periods of storage.

Y-bearings and Y-bearing units, which are no longer in their original packages, must be adequately protected against corrosion and contamination and should also be identified in some way by their complete designation.



Designation systems

The complete designation for a Y-bearing or a Y-bearing unit consists of:

- prefixes, identifying the Y-bearing or Y-bearing unit series
- figures, identifying the size
- suffixes, identifying designs and variants

More details about the basic designations and the supplementary designations can be obtained from the designation charts:

- Y-bearing designation system
(→ **table 1, page 76**)
- Y-bearing unit designation system
(→ **table 2, page 77**)



Designation systems

Table 1

Y-bearing designation system

Examples YAR 208-2RF/HV
 YEL 203/15-2FW

YAR	2	08	2RF/HV
YEL	2	03/15	2FW

Bearing series

YAR	Inner ring extended on both sides, with grub screws
YAT	Inner ring extended on one side, with grub screws
YEL	Inner ring extended on both sides, with an eccentric locking collar
YET	Inner ring extended on one side, with an eccentric locking collar
YHB	Inner ring extended on both sides, hexagonal bore
YHC	Inner ring extended on both sides, hexagonal bore
YQC	Inner ring extended on both sides, square bore
YSA	Inner ring symmetrically extended on both sides

Dimension series

2	Bearing to ISO 9628:2006
17262	Bearing to ISO 15:1998, Dimension Series 02, spherded outside diameter
17263	Bearing to ISO 15:1998, Dimension Series 03, spherded outside diameter

Bore diameter

Bearings for metric shafts	
03/12	12 mm bore diameter
03/15	15 mm bore diameter
03	17 mm bore diameter
04	20 mm bore diameter
	to
20	100 mm bore diameter

Bearings for inch shafts	
	Three-figure combination that follows the designation of the basic metric bearing and is separated from this by a hyphen; the first figure is the number of whole inches and the second and third figures are the number of sixteenths of an inch, e.g. 204-012
-012	$\frac{3}{4}$ in = 19,050 mm bore diameter
-100	1 in = 25,400 mm bore diameter
	to
-208	$2\frac{1}{2}$ in = 63,500 mm bore diameter

Suffixes

Seals	
-	Contact standard integral seal on both sides of the bearing
2F	Contact standard integral seal with an additional plain flinger on both sides of the bearing
2LS8	Contact seal of synthetic rubber with sheet steel reinforcement on both sides of the bearing
2RF	Contact standard integral seal with an additional rubberized flinger on both sides of the bearing
2RS1	Contact seal of synthetic rubber with sheet steel reinforcement on both sides of the bearing
VP076	Pressed sheet steel shield on both sides of the bearing

Material

HV	Bearing components of stainless steel and food-grade grease
VA201	Bearing with pressed steel cage for high temperatures
VA228	Bearing with "coronet" cage of graphite for temperatures -150 to +350 °C
VE495	Zinc-coated inner and outer ring and stainless steel flingers, food-grade grease
VL065	Zinc-coated inner ring bore and side faces

Other features

AH	Bearing for air-handling applications
C	Cylindrical outside diameter
G	Lubrication groove in the outside diameter, located at the side opposite the locking device
GR	Lubrication groove in the outside diameter, located at the side of the locking device
K	Tapered bore, taper 1:12
U	Bearing without an eccentric locking collar
VT357	Bearing filled with a special grease
W	Bearing without lubrication hole(s)
W64	Solid Oil fill

Table 2

Y-bearing unit designation system

Examples	FYTAKC 30 NTR/VE495
	SY 1.1/2 TF
	TUJ 50 TF
	PFD 40

FY	TB	KC	30	NTR	/VE495
SY			1.1/2	TF	
TUJ			50	TF	
PF	D		40		

Identification of housing type

FY(J)	J stands for dimensions to standard JIS 1559-1995
P	Flanged housing
PF	Plummer block housing, pressed steel
SV(J)	Flanged housing, pressed steel
TU(J)	Plummer block housing
	Take-up housing

Identification of unit design

-	Base version; when flanged: square flange
C	Flanged unit, round flange
D	Flanged unit, triangular flange
F	Plummer block unit, short base
H	Plummer block unit, lower centre height
M	Plummer block unit, higher load carrying capacity
T	Flanged unit, oval flange
TB	Flanged unit, oval flange
TF	Flanged unit, oval flange, no relubrication facility

Identification of housing material

-	Grey cast iron
K	Composite material, black coloured, with zinc-coated sheet steel inserts
KC	Composite material, light-grey coloured, with stainless steel inserts and embedded steel coil
L	Composite material, light-grey coloured, with stainless steel inserts

Identification of size

12	Bearing units for metric shafts: in millimetres uncoded 12 mm bore diameter
100	to 100 mm bore diameter
3/4	Bearing units for inch shafts: in inches uncoded 3/4 in = 19,05 mm bore diameter
2 1/2	to 2 1/2 in = 63,5 mm bore diameter
503	Housings from grey cast iron or composite material for Y-bearings of sizes 203, 203/12 and 203/15
520	to for Y-bearings of size 220
40	Housings from sheet steel (not supplied as bearing unit) 40 mm housing bore diameter
90	to 90 mm housing bore diameter

Identification of inserted Y-bearing

FM	Y-bearing with an eccentric locking collar, YET 2 series
KF	Y-bearing with a tapered bore, YSA 2-2FK series
NTH	Y-bearing with grub screws, YAR-2RF/HV series
NTR	Y-bearing with grub screws, YAR-2RF/VE495 series
PF	Y-bearing with SKF ConCentra locking
RM	Y-bearing with grub screws, YAT 2 series
TF	Y-bearing with grub screws, YAR 2-2F series
TR	Y-bearing with grub screws, YAR 2-2RF series
WF	Y-bearing with an eccentric locking collar, YEL 2-2F series

Other features

See **table 1** "Y-bearing designation system"



Y-bearings

2

Designs	80
Special designs	81
Y-bearings with grub screws	82
Bearings made of rolling bearing steel	82
Bearings with zinc-coated rings	83
Stainless steel bearings	83
Y-bearings with an eccentric locking collar	84
Y-bearings with a tapered bore	85
Y-bearings with a standard inner ring	85
Y-bearings with a hexagonal or square bore	86
Seals	87
Standard seals	87
Standard seals with an additional flinger	87
Multiple seals	87
RS1 seals	88
LS8 seals.....	88
Shields	88
Permissible operating temperatures for seals	88
Data – general	89
Dimensions	89
Tolerances	89
Radial internal clearance	90
Cages	91
Grease fills	91
Mounting	91
Product tables	92
2.1 Y-bearings with grub screws,	
metric shafts	92
inch shafts.....	94
2.2 Y-bearings with an eccentric locking collar,	
metric shafts	98
inch shafts.....	100
2.3 Y-bearings with a tapered bore on an adapter sleeve,	
metric shafts	102
inch shafts.....	104
2.4 Y-bearings with a standard inner ring, metric shafts.....	106
2.5 Y-bearings with a hexagonal bore, inch shafts	108

Designs

SKFY-bearings, which are usually referred to as insert bearings, are basically sealed deep groove ball bearings in the 62 and 63 series, with a convex outer ring. These bearings are manufactured in a number of different series and sizes and are available with a standard inner ring or an inner ring that is extended on one or both sides (→ fig. 1).

The various insert bearing series differ in the way the bearing is located onto the shaft. The most common methods use any one of the following:

- grub (set) screws (→ fig. 2)
- eccentric locking collar (→ fig. 3)
- adapter sleeve (→ fig. 4)
- interference fit (→ fig. 5)

The standard SKF assortment includes Y-bearings made of rolling bearing steel as well as stainless steel and Y-bearings with zinc-coated components.




Fig. 1




Fig. 2




Fig. 3




Fig. 4

Special designs

In addition to the standard range, the following special insert bearings are available:


- Y-bearings for extreme temperature applications ([→ page 249](#))
- Y-bearings for the food industry ([→ page 274](#))
- Y-bearings with Solid Oil ([→ SKF Interactive Engineering Catalogue](#), available online at www.skf.com)

Other variants include Y-bearings with:

- special coatings
- non-contacting seals
- special grease fills

These special bearings are designed for applications where operating temperatures may exceed the range for standard bearings, where conventional lubrication methods or materials can not be used, or where smooth running is a key operational parameter.

Fig. 5



Y-bearings with grub screws

Y-bearings with grub screws in the inner ring are locked in position on the shaft by tightening the two cup point hexagonal grub screws, positioned 120° apart. These bearings are suitable for applications where the direction of rotation is constant or alternating. Two different standard designs are available.

Y-bearings in the YAT 2 series have an extended inner ring on one side, and are sealed with the rugged standard integral seal (→ fig. 6). The outer ring has two lubrication holes as standard.

Y-bearings in the YAR 2 series have an extended inner ring on both sides (→ fig. 7). This reduces the extent to which the inner ring can tilt on the shaft, which enables the bearing to run more smoothly. These bearings are fitted with the rugged standard integral seal and one of the following flinger options:

- plain sheet steel flingers, designation suffix 2F
- rubberized sheet steel flingers (multiple seal), designation suffix 2RF

The outer ring has two lubrication holes as standard.

Bearings without lubrication holes can be supplied on request. They are identified by the suffix W.

Bearings made of rolling bearing steel

Y-bearings in the YAT 2 and YAR 2 standard series are manufactured from high-grade carbon chromium steel. The SKF range comprises bearings for metric shafts from 12 to 100 mm and inch shafts from 1/2 to 3 inch (→ product table on pages 92 to 97).

Fig. 6





Fig. 7



Bearings with zinc-coated rings

Y-bearings with an extended inner ring on both sides (YAR 2 series) are also available with zinc-coated rings for use in corrosive environments. These bearings, series designation YAR 2-2RF/VE495:

- use highly efficient multiple seals made of food-compatible rubber and stainless steel flingers
- are fitted with grub screws made of stainless steel
- are filled with a food-grade grease
- can be relubricated through the lubrication holes in the outer ring

The SKF range of Y-bearings with zinc-coated rings covers bearings for metric shafts from 20 to 40 mm (→ product table on [page 92](#)).

Stainless steel bearings

All steel components of stainless steel Y-bearings are made of stainless steel. This includes the rings, balls, sheet metal parts of the seal and the grub screws. The inner ring is extended on both sides. These bearings, series designation YAR 2-2RF/HV:

- use highly efficient multiple seals made of food-compatible rubber
- are filled with a food-grade grease
- can be relubricated through one lubrication hole in the outer ring

The SKF range covers bearings for metric shafts from 20 to 40 mm as well as inch shafts from $\frac{3}{4}$ to $1\frac{1}{2}$ inch (→ product table on [page 92](#) to [96](#)).

The dynamic load carrying capacity of a stainless steel bearing is less than that of a similarly sized standard steel bearing.

Y-bearings with an eccentric locking collar

Y-bearings with an eccentric locking collar are intended primarily for use in applications where the direction of rotation is constant. On one side of the bearing inner ring is an eccentric extension that fits the locking collar. Turning the locking collar on the inner ring extension in the direction of rotation locks the collar and bearing on the shaft. A single grub screw further secures the collar to the shaft. There are two standard series available from SKF.

Y-bearings in the YET 2 series have an extended inner ring on one side and are fitted with the rugged standard integral seal (→ **fig. 8**). The eccentric collar is coated (zinc-coated for bearings with a metric bore, black oxidized for bearings with an inch bore). The outer ring has two lubrication holes as standard.

Y-bearings in the YEL 2 series have an extended inner ring on both sides (→ **fig. 9**). This reduces the extent to which the inner ring can tilt on the shaft, which enables the bearing to run more smoothly. These bearings are fitted with the rugged standard integral seal and one of the following flinger options:

- plain sheet steel flingers, designation suffix 2F
- rubberized sheet steel flingers (multiple seal), designation suffix 2RF/VL065

The outer ring has two lubrication holes as standard.

Bearings without lubrication holes can be supplied on request. They are identified by the suffix W.

The SKF range comprises bearings for metric shafts from 15 to 60 mm and inch shafts from $\frac{1}{2}$ to $2\frac{7}{16}$ inch (→ product table on **pages 98 to 101**).

Fig. 8




Fig. 9





Fig. 10



Y-bearings with a tapered bore


Y-bearings in the YSA 2-2FK series (→ fig. 10) have a symmetrically extended inner ring on both sides and a tapered bore (taper 1:12) enabling them to be mounted on a standard adapter sleeve in the H 23 series. The appropriate adapter sleeve is not part of the bearing and must be ordered separately.

Y-bearings with a tapered bore are equipped with the rugged standard integral seal, fitted with additional plain sheet steel flingers. The outer ring has two lubrication holes as standard.

Mounting onto an adapter sleeve enables the bearings to operate at higher speeds and run more smoothly in applications where the direction of rotation is constant or alternating.

The SKF range, which comprises bearings with bore diameters ranging from 25 to 65 mm, fits adapter sleeves in the H 23 series for metric shafts ranging from 20 to 60 mm (→ product table on [page 102](#)). These bearings can also be used on adapter sleeves in the HA 23, HE 23 and HS 23 series for inch shafts ranging from $\frac{3}{4}$ to $2\frac{3}{8}$ inch (→ product table on [page 104](#)).

Fig. 11




Y-bearings with a standard inner ring

Y-bearings in the 17262(00)-2RS1 and 17263(00)-2RS1 series (→ fig. 11) with a standard inner ring have normal tolerances for the bearing bore diameter and are located on the shaft using an appropriate interference fit. They do not have any lubrication holes in the outer ring. The only difference between these Y-bearings and deep groove ball bearings in the 62 and 63 series is the spherized outside surface of the outer ring.

These Y-bearings are suitable for applications where the direction of the load alternates and where smooth running is a key operational parameter. These bearings can accommodate heavier axial loads than Y-bearings of any other design. They can also operate at the same speeds as the corresponding sealed deep groove ball bearings.

The SKF range comprises bearings for metric shafts from 17 to 60 mm (→ product table on [page 106](#)).

Fig. 12



Y-bearings with a hexagonal or square bore


Y-bearings with a hexagonal or square bore are intended primarily for high torque applications. The bore is produced to a plus tolerance and enables easy mounting and dismounting. These bearings should be axially located on the shaft using adjacent components.

The bearings have a standard outer ring without lubrication holes (designation suffix W).

Bearings in the YHB 2 and YHC 2 series have a hexagonal bore (→ **fig. 12**). They are equipped with rugged contact seals (designation suffix LS8). The SKF assortment comprises bearings for shafts with width flats from $1\frac{1}{8}$ to $1\frac{1}{2}$ inch across (→ product table on **page 108**).

For more information, contact the SKF application engineering service.

Fig. 13



Seals

Since Y-bearings were originally developed for use in agricultural applications, sealing has always been very important. Therefore, SKF Y-bearings are available with different sealing configurations to suit the operating conditions.

Fig. 14





Fig. 15



Standard seals

The standard seal for SKF Y-bearings is the rugged integral seal. It consists of a pressed sheet steel washer with a sealing lip made of acrylonitrile-butadiene rubber (NBR) vulcanized to its inner surface (→ fig. 13). The non-contact sheet steel washer forms a narrow gap with the cylindrical surface of the inner ring shoulder and protects the land-riding seal against coarse contaminants.

Standard seals with an additional flinger

For more contaminated environments, a Y-bearing with an inner ring extended on both sides should be used. These bearings are equipped with seals that have an additional plain, sheet steel flinger on the outboard side of the integral standard seal (→ fig. 14) and are identified by the designation suffix 2F. The flingers are made of sheet steel or stainless sheet steel respectively, have an interference fit on the inner ring and considerably enhance the seals' effectiveness without increasing friction.

Multiple seals

For Y-bearing arrangements requiring a high degree of reliability, even in extremely contaminated environments, a bearing with an inner ring extended on both sides should be used with the highly efficient multiple seal arrangement.


In this sealing arrangement (→ fig. 15), a flinger with a vulcanized rubber lip is fitted outside the standard integral seal. This acrylonitrile-butadiene rubber lip seals axially against the integral seal. The space between the integral seal and the rubberized flinger is filled with grease to provide additional protection.

Y-bearings

RS1 seals

Y-bearings with a standard inner ring, 17262(00)-2RS1 and 17263(00)-2RS1 series, are equipped with the RS1 contact seal developed for standard SKF deep groove ball bearings (→ fig. 16). These seals, which are made from oil and wear resistant acrylonitrile-butadiene rubber (NBR), are reinforced with a pressed sheet steel insert and seal against the cylindrical surface of the inner ring shoulder.


Fig. 16



LS8 seals

Y-bearings with a hexagonal bore, series YHB 2 and YHC 2, are equipped with LS8 contact seals (→ fig. 17). These seals, which are made from acrylonitrile-butadiene rubber (NBR), are reinforced with a pressed sheet steel insert and seal against the cylindrical surface of the inner ring shoulder.

Fig. 17




Shields

Y-bearings are also available with shields (→ fig. 18), which are identified by the designation suffix VP076.

Pressed steel shields are used in temperature or speed sensitive applications where additional friction is not desirable. In applications where shielded bearings are used, contamination should not be severe and water, steam or moisture should not be able to enter the bearing.

Fig. 18



Permissible operating temperatures for seals

Contact seals can be used at operating temperatures between –30 and +100 °C. Temperatures up to 120 °C are also possible for brief periods, but might have a negative effect on the service life of the grease.

Data – general

Dimensions

- The boundary dimensions of Y-bearings in the YAR 2, YET 2 and YEL 2 series are in accordance with ISO 9628:2006.
- The boundary dimensions of Y-bearings in the 17262(00)-2RS1 and 17263(00)-2RS1 series are in accordance with those of deep groove ball bearings in the 62 and 63 series and are in accordance with ISO 15:1998, except that the bearings have a spheroidized outside diameter
- The boundary dimensions of Y-bearings in the YSA 2-2FK series are in accordance with JIS 1558-1995
- Y-bearings in the YAT 2, YHB 2, YHC 2 and YQC 2 series have not been standardized either nationally or internationally, but are common in the marketplace.

The dimensions of the adapter sleeves in the H 23 series, which are normally used to locate YSA 2-2FK bearings onto the shaft, are in accordance with ISO 2982-1:1995.

Tolerances

The bore and outside diameter of Y-bearings are produced to tolerances indicated in **table 1**. Symbols used are explained in the following.

The values specified for the tolerance zone of the bore diameter of bearings in the YAT 2, YAR 2, YET 2 and YEL 2 series are slightly tighter than Normal tolerances listed in ISO 9628:2006.

The values specified for bearings in the 17262(00)-2RS1 and 17263(00)-2RS1 series are in accordance with ISO 492:2002.

SKF manufactures bearings in the YSA 2-2FK series with a tapered bore, taper 1:12. They are designed to fit adapter sleeves in the H 23 series, for metric and inch shafts.

The hexagonal or square bore of bearings in the YHB 2, YHC 2 and YQC 2 series is produced to a 0/+0,25 mm tolerance.

Symbols

d	Nominal bore diameter
Δ_{dmp}	Deviation of the mean bore diameter from the nominal
D	Nominal outside diameter
Δ_{Dmp}	Deviation of the mean outside diameter from the nominal

Table 1

Tolerances for SKF Y-bearings

Nominal diameter		Inner ring Bearings in the series YAT 2, YAR 2, YET 2, YEL 2				Outer ring All bearings			
		Δ_{dmp}		Δ_{dmp}		Δ_{Dmp}			
Over	Incl.	High	Low	High	Low	High	Low		
mm		μm				μm			
10 18	18 31,75	+15 +18	+5 +5	0 0	-8 -10	- -	- -		
31,75 50,8	50,8 80,962	+19 +21	+5 +5	0 0	-12 -15	0 0	-10 -10		
80,962 120	120 150	+25 -	+5 -	- -	- -	0 0	-15 -15		
150	180	-	-	-	-	0	-20		

Y-bearings

Radial internal clearance

Y-bearings are manufactured as standard with the radial internal clearance indicated in **table 2**. The values specified there for bearings in the:

- YAT, YAR, YET, YEL, YHB, YHC and YQC series are in accordance with Group N radial internal clearances as listed ISO 9628:2006
- YSA 2 K series are in accordance with Group 3 radial internal clearances as listed in ISO 9628:2006
- 17262(00)-2RS1 and 17263(00)-2RS1 series are manufactured with Normal radial internal clearances for deep groove ball bearings as standard. The values are in accordance with ISO 5753:1991

Table 2

Radial internal clearance for Y-bearings

Bearing size ¹⁾		Radial internal clearance of Y-bearings in the series			
from	to	YAT 2, YAR 2, YET 2, YEL 2 YHC 2	YSA 2 K	17262 (00) 17263(00)	
min	max	min	max	min	max
– μm					
03	03	10	25	–	–
04	04	12	28	–	5
05	06	12	28	23	41
07	08	13	33	28	46
09	10	14	36	30	51
11	13	18	43	38	61
14	16	20	51	–	–
17	20	24	58	–	–

¹⁾ For example: bearing size 06 includes all bearings based on a Y 206 bearing, such as YAR 206-101-2F, YAR 206-102-2F, YAR 206-2F, YAR 206-103-2F, YAR 206-104-2F



Cages

All standard Y-bearings are fitted with an injection moulded snap-type cage of glass fibre reinforced polyamide 66 (→ fig. 19). These cages exhibit excellent performance characteristics in a variety of applications where operating temperatures do not exceed 120 °C.

The lubricants generally used for Y-bearings do not have any detrimental effect on cage properties.

Grease fills

All standard design SKF Y-bearings and Y-bearings with a square bore are filled with a high quality, long lasting grease containing a lithium-calcium thickener with a consistency of 2 on the NLGI scale.

Y-bearings made of stainless steel, in the YAR 2-2RF/HV series, and Y-bearings with zinc-coated rings, in the YAR 2-2RF/VE495 series, meet the demands of food-processing machinery in a corrosive environment. They are filled with a non-toxic, food-grade grease based on a synthetic hydrocarbon oil using an aluminium-complex soap as a thickener.

Y-bearings with a hexagonal bore are filled with a premium quality, mineral oil based grease using a lithium-complex soap (designation suffix VT357). The grease, which has a consistency of 3 on the NLGI scale, has good water and corrosion resistant properties and provides excellent lubrication at high operating temperatures.


For additional information about lubrication and different lubricants, refer to the section *Lubrication and maintenance*, starting on **page 48**.

Mounting

The mounting procedures for Y-bearings depend on the method used to attach the unit to the shaft. The procedures are described in detail in the section *Mounting instructions*, starting on **page 52**.

Y-bearings with a standard inner ring are mounted on the shaft with an interference fit.

Y-bearings with grub screws, metric shafts
d 12 – 100 mm

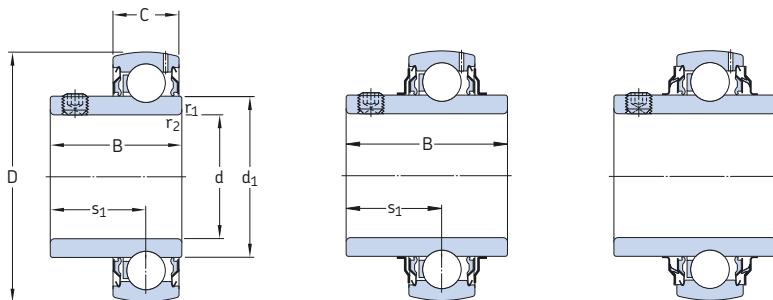

YAT


YAR-2F

YAR-2RF

Dimensions							Basic load ratings dynamic static		Fatigue load limit P_u	Limiting speed with shaft tolerance h6	Mass	Designation	
d	D	B	C	d_1	s_1	$r_{1,2}$ min	C	C_0	kN	kN	r/min	kg	–
12	40	27,4	12	24,2	15,9	0,3	9,56	4,75	0,2	9 500	0,11	YAR 203/12-2F	
15	40	27,4	12	24,2	15,9	0,3	9,56	4,75	0,2	9 500	0,10	YAR 203/15-2F	
17	40	22,1	12	24,2	15,9	0,3	9,56	4,75	0,2	9 500	0,07	YAT 203	
	40	27,4	12	24,2	15,9	0,3	9,56	4,75	0,2	9 500	0,09	YAR 203-2F	
20	47	25,5	14	28,2	18,3	0,6	12,7	6,55	0,28	8 500	0,11	YAT 204	
	47	31	14	28,2	18,3	0,6	12,7	6,55	0,28	8 500	0,14	YAR 204-2F	
	47	31	14	28,2	18,3	0,6	12,7	6,55	0,28	5 000	0,14	YAR 204-2RF	
	47	31	14	28,2	18,3	0,6	10,8	6,55	0,28	5 000	0,14	YAR 204-2RF/HV	
	47	31	14	28,2	18,3	0,6	12,7	6,55	0,28	5 000	0,14	YAR 204-2RF/VE495	
25	52	27,2	15	33,7	19,5	0,6	14	7,8	0,335	7 000	0,14	YAT 205	
	52	34,1	15	33,7	19,8	0,6	14	7,8	0,335	7 000	0,17	YAR 205-2F	
	52	34,1	15	33,7	19,8	0,6	14	7,8	0,335	4 300	0,17	YAR 205-2RF	
	52	34,1	15	33,7	19,8	0,6	11,9	7,8	0,335	4 300	0,18	YAR 205-2RF/HV	
	52	34,1	15	33,7	19,8	0,6	14	7,8	0,335	4 300	0,18	YAR 205-2RF/VE495	
30	62	30,2	18	39,7	21	0,6	19,5	11,2	0,475	6 300	0,23	YAT 206	
	62	38,1	18	39,7	22,2	0,6	19,5	11,2	0,475	6 300	0,28	YAR 206-2F	
	62	38,1	18	39,7	22,2	0,6	19,5	11,2	0,475	3 800	0,28	YAR 206-2RF	
	62	38,1	18	39,7	22,2	0,6	16,3	11,2	0,475	3 800	0,29	YAR 206-2RF/HV	
	62	38,1	18	39,7	22,2	0,6	19,5	11,2	0,475	3 800	0,29	YAR 206-2RF/VE495	
35	72	33	19	46,1	23,3	1	25,5	15,3	0,655	5 300	0,31	YAT 207	
	72	42,9	19	46,1	25,4	1	25,5	15,3	0,655	5 300	0,41	YAR 207-2F	
	72	42,9	19	46,1	25,4	1	25,5	15,3	0,655	3 200	0,41	YAR 207-2RF	
	72	42,9	19	46,1	25,4	1	21,6	15,3	0,655	3 800	0,42	YAR 207-2RF/HV	
	72	42,9	19	46,1	25,4	1	25,5	15,3	0,655	3 800	0,42	YAR 207-2RF/VE495	
40	80	36	21	51,8	25,3	1	30,7	19	0,8	4 800	0,43	YAT 208	
	80	49,2	21	51,8	30,2	1	30,7	19	0,8	4 800	0,55	YAR 208-2F	
	80	49,2	21	51,8	30,2	1	30,7	19	0,8	2 800	0,55	YAR 208-2RF	
	80	49,2	21	51,8	30,2	1	24,7	19	0,8	2 800	0,56	YAR 208-2RF/HV	
	80	49,2	21	51,8	30,2	1	30,7	19	0,8	2 800	0,56	YAR 208-2RF/VE495	
45	85	37	22	56,8	25,8	1	33,2	21,6	0,915	4 300	0,48	YAT 209	
	85	49,2	22	56,8	30,2	1	33,2	21,6	0,915	4 300	0,60	YAR 209-2F	
	85	49,2	22	56,8	30,2	1	33,2	21,6	0,915	2 400	0,60	YAR 209-2RF	

Dimensions							Basic load ratings dynamic static		Fatigue load limit P_u	Limiting speed with shaft tolerance h6	Mass	Designation
d	D	B	C	d_1	s_1	$r_{1,2}$ min	C	C_0				
mm							kN		kN	r/min	kg	-
50	90	38,8	22	62,5	27,6	1	35,1	23,2	0,98	4 000	0,54	YAT 210
	90	51,6	22	62,5	32,6	1	35,1	23,2	0,98	4 000	0,69	YAR 210-2F
	90	51,6	22	62,5	32,6	1	35,1	23,2	0,98	2 200	0,69	YAR 210-2RF
55	100	55,6	25	69,1	33,4	1	43,6	29	1,25	3 600	0,94	YAR 211-2F
	100	55,6	25	69,1	33,4	1	43,6	29	1,25	1 900	0,94	YAR 211-2RF
60	110	65,1	26	75,6	39,7	1,5	52,7	36	1,53	3 400	1,30	YAR 212-2F
	110	65,1	26	75,6	39,7	1,5	52,7	36	1,53	1 800	1,30	YAR 212-2RF
65	120	68,3	27	82,5	42,9	1,5	57,2	40	1,7	3 000	1,70	YAR 213-2F
	120	68,3	27	82,5	42,9	1,5	57,2	40	1,7	1 600	1,70	YAR 213-2RF
70	125	69,9	28	87	39,7	1,5	62,4	45	1,86	2 800	1,85	YAR 214-2F
75	130	73,1	29	92	46,1	1,5	66,3	49	2,04	2 600	2,05	YAR 215-2F
80	140	77,9	30	97,4	47,7	2	72,8	53	2,16	2 400	2,45	YAR 216-2F
85	150	81	34	105	50,8	2	83,2	62	2,4	2 200	3,20	YAR 217-2F
90	160	89	36	112,5	54	2	95,6	72	2,7	2 000	4,00	YAR 218-2F
100	180	98,4	40	124,5	63,4	2	124	93	3,35	1 900	5,25	YAR 220-2F

Y-bearings with grub screws, inch shafts
d 1/2 – 1 7/16 in

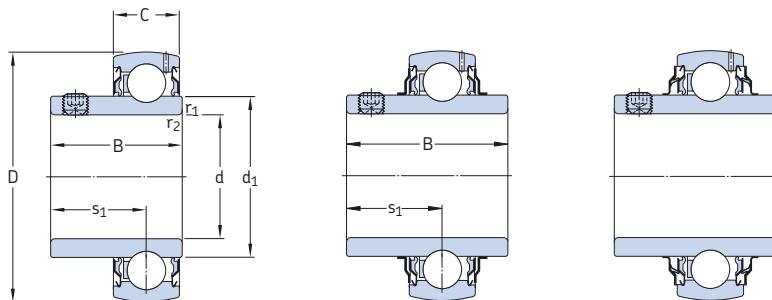

YAT


YAR-2F

YAR-2RF

Dimensions							Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass	Designation
d	D	B	C	d ₁	s ₁	r _{1,2} min	C	C ₀	P _u	r/min	lb/kg	–
1/2 12,7	1.5748 40	1.08 27,4	0.47 12	0.95 24,2	0.63 15,9	0.01 0,3	2 150 9,56	1 070 4,75	50 0,2	9 500	0.27 0,12	YAR 203-008-2F
5/8 15,875	1.5748 40	1.08 27,4	0.47 12	0.95 24,2	0.63 15,9	0.01 0,3	2 150 9,56	1 070 4,75	50 0,2	9 500	0.23 0,11	YAR 203-010-2F
5/8 15,875	1.5748 40	0.89 22,5	0.47 12	0.95 24,2	0.63 16	0.01 0,3	2 150 9,56	1 070 4,75	50 0,2	9 500	0.21 0,10	YAT 203-010
3/4 19,05	1.8504 47	1.22 31	0.55 14	1.11 28,2	0.72 18,3	0.02 0,6	2 860 12,7	1 470 6,55	60 0,28	8 500	0.36 0,17	YAR 204-012-2F
3/4 19,05	1.8504 47	1.22 31	0.55 14	1.11 28,2	0.72 18,3	0.02 0,6	2 860 12,7	1 470 6,55	60 0,28	5 000	0.36 0,16	YAR 204-012-2RF
3/4 19,05	1.8504 47	1.22 31	0.55 14	1.11 28,2	0.72 18,3	0.02 0,6	2 860 12,7	1 470 6,55	60 0,28	8 500	0.34 0,16	YAR 204-012-2F/AH
3/4 19,05	1.8504 47	1.22 31	0.55 14	1.11 28,2	0.72 18,3	0.02 0,6	2 430 10,8	1 470 6,55	60 0,28	5 000	0.36 0,16	YAR 204-012-2RF/HV
3/4 19,05	1.8504 47	1.00 25,5	0.55 14	1.11 28,2	0.72 18,3	0.02 0,6	2 860 12,7	1 470 6,55	60 0,28	8 500	0.31 0,14	YAT 204-012
7/8 22,225	2.0472 52	1.07 27,2	0.59 15	1.33 33,7	0.77 19,5	0.02 0,6	3 150 14	1 760 7,8	80 0,335	7 000	0.37 0,17	YAT 205-014
15/16 23,813	2.0472 52	1.34 34,1	0.59 15	1.33 33,7	0.78 19,8	0.02 0,6	3 150 14	1 760 7,8	80 0,335	7 000	0.47 0,21	YAR 205-015-2F
15/16 23,813	2.0472 52	1.07 27,2	0.59 15	1.33 33,7	0.77 19,5	0.02 0,6	3 150 14	1 760 7,8	80 0,335	7 000	0.40 0,18	YAT 205-015
1 25,4	2.0472 52	1.34 34,1	0.59 15	1.33 33,7	0.78 19,8	0.02 0,6	3 150 14	1 760 7,8	80 0,335	7 000	0.43 0,19	YAR 205-100-2F
1 25,4	2.0472 52	1.34 34,1	0.59 15	1.33 33,7	0.78 19,8	0.02 0,6	3 150 14	1 760 7,8	80 0,335	4 300	0.43 0,19	YAR 205-100-2RF
1 25,4	2.0472 52	1.34 34,1	0.59 15	1.33 33,7	0.78 19,8	0.02 0,6	3 150 14	1 760 7,8	80 0,335	7 000	0.43 0,19	YAR 205-100-2F/AH
1 25,4	2.0472 52	1.34 34,1	0.59 15	1.33 33,7	0.78 19,8	0.02 0,6	2 680 14	1 760 7,8	80 0,335	4 300	0.43 0,19	YAR 205-100-2RF/HV
1 25,4	2.0472 52	1.07 27,2	0.59 15	1.33 33,7	0.77 19,5	0.02 0,6	3 150 14	1 760 7,8	80 0,335	7 000	0.36 0,16	YAT 205-100
1 1/16 26,988	2.4409 62	1.50 38,1	0.71 18	1.56 39,7	0.87 22,2	0.02 0,6	4 390 19,5	2 520 11,2	110 0,475	6 300	0.76 0,34	YAR 206-101-2F

Dimensions							Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass	Designation
d	D	B	C	d ₁	s ₁	r _{1,2} min	C	C ₀	P _u	r/min	lb/kg	-
in/mm							lbf/kN		lbf/kN		r/min	
1 1/8 28,575	2,4409 62	1.50 38,1	0.71 18	1.56 39,7	0.87 22,2	0.02 0.6	4 390 19,5	2 520 11,2	110 0,475	6 300	0.76 0,34	YAR 206-102-2F
1 3/16 30,163	2,4409 62 2,4409 62 2,4409 62 2,4409 62 2,4409 62	1.50 38,1 1.50 38,1 1.22 31 1.5 38,1	0.71 18 0.71 18 0.71 18 0.71 18	1.56 39,7 1.56 39,7 1.56 39,7 1.56 39,7	0.87 22,2 0.87 22,2 0.87 22 0.87 22,2	0.02 0.6 0.02 0.6 0.04 1 0.02 0.6	4 390 19,5 4 390 19,5 4 390 19,5 3 670 16,3	2 520 11,2 2 520 11,2 2 520 11,2 2 520 11,2	110 0,475 110 0,475 110 0,475 110 0,475	6 300 6 300 6 300 6 300 3 800	0.68 0,31 0.68 0,31 0.62 0,28 0.64 0,29	YAR 206-103-2F YAR 206-103-2F/AH YAT 206-103 YAR 206-103-2RF/HV
1 1/4 31,75	2,4409 62 2,8346 72 2,8346 72 2,8346 72 2,8346 72 2,4409 62	1.50 38,1 1.69 42,9 1.69 42,9 1.69 42,9 1.22 31	0.71 18 0.75 19 1.00 25,4 0.04 1 1.00 0.04 1.00 0.04 1.00 0.04 1.00 0.04	1.56 39,7 1.82 46,1 1.82 46,1 1.82 46,1 1.56 39,7	0.87 22,2 0.6 25,4 1 25,4 1 25,4 0.87 22 1	0.02 0.6 0.04 1 0.04 0.04 0.04 0.04 0.04 0.04 0.04 0.04 0.04 0.04 0.04	4 390 19,5 5 740 25,5 5 740 25,5 5 740 25,5 4 860 21,6 4 390 19,5	2 520 11,2 3 440 15,3 3 440 15,3 3 440 15,3 3 440 15,3 2 520 11,2 3 440 15,3	110 0,475 110 0,655 110 0,655 110 0,655 110 0,655 110 0,475 110 0,475	6 300 5 300 5 300 5 300 3 200 3 800 3 800 6 300 0,61 0,28	0.62 0,28 1.15 0,52 1.00 0,46 1.15 0,52 0,61 0,28	YAR 206-104-2F YAR 207-104-2F YAR 207-104-2RF YAR 207-104-2RF/HV YAT 206-104
1 5/16 33,338	2,8346 72	1.69 42,9	0.75 19	1.82 46,1	1.00 25,4	0.04 1	5 740 25,5	3 440 15,3	150 0,655	5 300	1.05 0,48	YAR 207-105-2F
1 3/8 34,925	2,8346 72 2,8346 72	1.69 42,9 1.69 42,9	0.75 19 0.75 19	1.82 46,1 1.81 46,1	1.00 25,4 1 25,4	0.04 0.04 0.04 0.04	5 740 25,5 4 860 21,6	3 440 15,3 3 440 15,3	150 0,655 150 0,655	5 300 3 800	1.00 0,46 0,93 0,42	YAR 207-106-2F YAR 207-106-2RF/HV
1 7/16 36,513	2,8346 72 2,8346 72 3,1496 80 2,8346 72	1.69 42,9 1.69 42,9 1.94 49,2 1.38 35	0.75 19 0.75 19 0.83 21 0.75 19	1.82 46,1 1.82 46,1 2,04 51,8 1.82 46,1	1.00 25,4 1.00 25,4 1,19 30,2 1.00 25,5	0.04 0.04 0.04 0.04 0.04 0.04 0.04 0.04	5 740 25,5 4 860 21,6 6 910 30,7 5 740 25,5	3 440 15,3 3 440 15,3 4 280 19 3 440 15,3	150 0,655 150 0,655 180 0,8 150 0,655	5 300 3 800 4 800 5 300	0.93 0,42 0.95 0,43 1.55 0,70 0,83 0,38	YAR 207-107-2F YAR 207-107-2RF/HV YAR 208-107-2F YAT 207-107

Y-bearings with grub screws, inch shafts
d 1 1/2 – 3 in

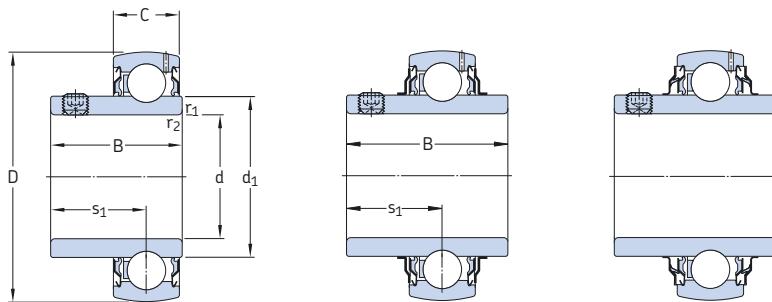

YAT


YAR-2F

YAR-2RF

Dimensions							Basic load ratings dynamic C static C ₀	Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Mass	Designation
d	D	B	C	d ₁	s ₁	r _{1,2} min	lbf/kN	lbf/kN	r/min	lb/kg	–
<i>in/mm</i>											
1 1/2 38,1	3,1496	1,94	0,83	2,04	1,19	0,04	6 910	4 280	180	4 800	1,30
80	49,2	21	51,8	30,2	1		30,7	19	0,8		0,59
3,1496	1,94	0,83	2,04	1,19	0,04		6 910	4 280	180	2 800	1,30
80	49,2	21	51,8	30,2	1		30,7	19	0,8		0,59
3,3465	1,94	0,87	2,24	1,19	0,04		7 470	4 860	210	4 300	1,89
85	49,2	22	56,8	30,2	1		33,2	21,6	0,915		0,86
3,1496	1,57	0,83	2,04	1,12	0,04		6 910	4 280	180	4 800	1,29
80	40	21	51,8	28,5	1		30,7	19	0,8		0,58
3,1496	1,94	0,83	2,04	1,19	0,04		5 560	4 280	180	2 800	1,25
80	49,2	21	51,8	30,2	1		24,7	19	0,8		0,56
1 9/16 39,688											
3,1496	1,94	0,83	2,04	1,19	0,04		6 910	4 280	180	4 300	1,40
80	49,2	21	51,8	30,2	1		30,7	19	0,8		0,64
1 5/8 41,275											
3,3465	1,94	0,87	2,24	1,19	0,04		7 470	4 860	210	4 300	1,75
85	49,2	22	56,8	30,2	1		33,2	21,6	0,915		0,79
1 11/16 42,863											
3,3465	1,94	0,87	2,24	1,19	0,04		7 470	4 860	210	4 300	1,65
85	49,2	22	56,8	30,2	1		33,2	21,6	0,915		0,75
3,3465	1,63	0,87	2,24	1,20	0,04		7 470	4 860	210	4 300	1,40
85	41,5	22	56,8	30,5	1		33,2	21,6	0,915		0,65
1 3/4 44,45											
3,3465	1,94	0,87	2,24	1,19	0,04		7 470	4 860	210	4 300	1,35
85	49,2	22	56,8	30,2	1		33,2	21,6	0,915		0,62
3,3465	1,94	0,87	2,24	1,19	0,04		7 470	4 860	210	2 400	1,35
85	49,2	22	56,8	30,2	1		33,2	21,6	0,915		0,62
3,3465	1,63	0,87	2,24	1,20	0,04		7 470	4 860	210	4 300	1,35
85	41,5	22	56,8	30,5	1		33,2	21,6	0,915		0,60
1 15/16 49,213											
3,5433	2,03	0,87	2,46	1,28	0,04		7 900	5 220	220	4 000	1,70
90	51,6	22	62,5	32,6	1		35,1	23,2	0,98		0,78
3,5433	2,03	0,87	2,46	1,28	0,04		7 900	5 220	220	2 200	1,70
90	51,6	22	62,5	32,6	1		35,1	23,2	0,98		0,78
3,5433	1,69	0,87	2,46	1,26	0,04		7 900	5 220	220	4 000	1,50
90	43	22	62,5	32	1		35,1	23,2	0,98		0,67
2 50,8											
3,9370	2,19	0,98	2,72	1,32	0,04		9 810	6 530	280	3 600	2,45
100	55,6	25	69,1	33,4	1		43,6	29	1,25		1,10
3,9370	2,19	0,98	2,72	1,32	0,04		9 810	6 530	280	3 600	2,45
100	55,6	25	69,1	33,4	1		43,6	29	1,25		1,10
3,9370	1,77	0,98	2,72	1,28	0,04		9 810	6 530	280	3 600	2,30
100	45	25	69,1	32,5	1		43,6	29	1,25		1,05

Dimensions							Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass	Designation
d	D	B	C	d ₁	s ₁	r _{1,2} min	dynamic C	static C ₀	P _u	r/min	lb/kg	-
in/mm							lbf/kN	lbf/kN				
2 3/16 55,563	3,9370	2,19	0,98	2,72	1,32	0,04	9 810	6 530	280	3 600	2,30	YAR 211-203-2F
	100	55,6	25	69,1	33,4	1	43,6	29	1,25		1,05	
	3,9370	2,19	0,98	2,72	1,32	0,04	9 810	6 530	280	3 600	2,30	YAR 211-203-2F/AH
	100	55,6	25	69,1	33,4	1	43,6	29	1,25		1,05	
	4,3307	2,56	1,02	2,98	1,56	0,06	11 860	8 100	340	3 400	3,75	YAR 212-203-2F
	110	65,1	26	75,6	39,7	1,5	52,7	36	1,53		1,70	
2 1/4 57,15	4,3307	2,56	1,02	2,98	1,56	0,06	11 860	8 100	340	3 400	3,55	YAR 212-204-2F
	110	65,1	26	75,6	39,7	1,5	52,7	36	1,53		1,60	
	4,3307	1,91	1,02	2,98	1,38	0,06	11 860	8 100	340	3 400	2,75	YAT 212-204
	110	48,5	26	75,6	35	1,5	52,7	36	1,53		1,25	
2 7/16 61,913	4,3307	2,56	1,02	2,98	1,56	0,06	11 860	8 100	340	3 400	3,00	YAR 212-207-2F
	110	65,1	26	75,6	39,7	1,5	52,7	36	1,53		1,35	
	4,3307	1,91	1,02	2,98	1,38	0,06	11 860	8 100	340	3 400	2,75	YAT 212-207
	110	48,5	26	75,6	35	1,5	52,7	36	1,53		1,25	
	4,9213	2,75	1,10	3,43	1,56	0,06	14 040	9 900	420	2 800	5,40	YAR 214-207-2F
	125	69,93	28	87	39,7	1,5	62,4	44	1,86		2,45	
2 1/2 63,5	4,7244	2,69	1,06	3,25	1,69	0,06	12 870	9 000	380	3 000	4,20	YAR 213-208-2F
	120	68,3	27	82,5	42,9	1,5	57,2	40	1,7		1,90	
	4,7244	2,69	1,06	3,25	1,69	0,06	12 870	9 000	380	3 000	4,20	YAR 213-208-2RF
	120	68,3	27	82,5	42,9	1,5	57,2	40	1,7		1,90	
	4,9213	2,75	1,10	3,43	1,56	0,06	14 040	9 900	420	2 800	5,30	YAR 214-208-2F
	125	69,93	28	87	39,7	1,5	62,4	44	1,86		2,40	
2 11/16 68,263	4,7244	2,69	1,06	3,25	1,69	0,06	12 870	9 000	380	3 000	3,75	YAR 213-211-2F
	120	68,3	27	82,5	42,9	1,5	57,2	40	1,7		1,70	
2 15/16 74,613	5,1181	2,88	1,14	3,62	1,82	0,06	14 920	11 030	460	2 600	4,85	YAR 215-215-2F
	130	73,1	29	92	46,1	1,5	66,3	49	2,04		2,20	
	5,1181	2,11	1,14	3,62	1,54	0,06	14 920	11 030	460	2 600	4,65	YAT 215-215
	130	53,5	29	92	39	1,5	66,3	49	2,04		2,10	
3 76,2	5,5118	3,07	1,18	3,83	1,88	0,08	16 400	11 900	486	2 400	6,30	YAR 216-300-2F
	140	77,9	30	97,4	47,7	2	72,8	53	2,16		2,85	
	5,5118	2,19	1,18	3,83	1,54	0,08	16 370	11 920	490	2 400	5,20	YAT 216-300
	140	55,5	30	97,4	39	2	72,8	53	2,16		2,35	

Y-bearings with an eccentric locking collar, metric shafts
d 15 – 60 mm

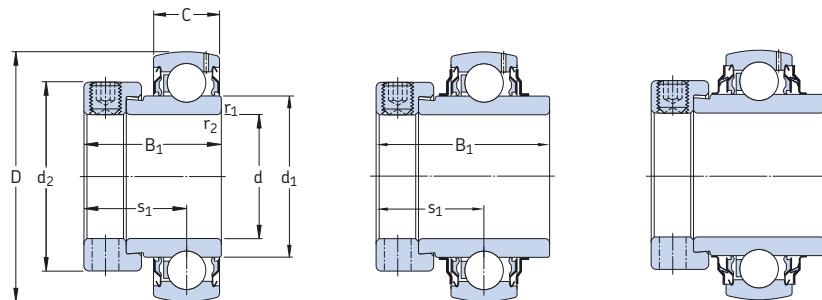


YET

YEL-2F

YEL-2RF/VL065

Dimensions							Basic load ratings dynamic static		Fatigue load limit P_u	Limiting speed with shaft tolerance $h6$	Mass	Designation
d	D	B ₁	C	d ₁	d ₂	s ₁	C	C ₀				
mm							kN	kN	r/min	kg	–	
15	40	28,6	12	24,2	27,2	22,1	0,3	9,56	4,75	0,2	9 500	0,12 YET 203/15
17	40	28,6	12	24,2	27,2	22,1	0,3	9,56	4,75	0,2	9 500	0,10 YET 203
20	47	31	14	28,2	32,4	23,5	0,6	12,7	6,55	0,28	8 500	0,18 YET 204
	47	31	14	28,2	32,4	23,5	0,6	12,7	6,55	0,28	8 500	0,18 YET 204/VL065
	47	43,7	14	28,2	32,4	26,6	0,6	12,7	6,55	0,28	8 500	0,19 YEL 204-2F
	47	43,7	14	28,2	32,4	26,6	0,6	12,7	6,55	0,28	5 000	0,19 YEL 204-2RF/VL065
25	52	31	15	33,7	37,4	23,5	0,6	14	7,8	0,335	7 000	0,18 YET 205
	52	31	15	33,7	37,4	23,5	0,6	14	7,8	0,335	7 000	0,18 YET 205/VL065
	52	44,4	15	33,7	37,4	26,9	0,6	14	7,8	0,335	7 000	0,24 YEL 205-2F
	52	44,4	15	33,7	37,4	26,9	0,6	14	7,8	0,335	4 300	0,24 YEL 205-2RF/VL065
30	62	35,7	18	39,7	44,1	26,7	0,6	19,5	11,2	0,475	6 300	0,30 YET 206
	62	35,7	18	39,7	44,1	26,7	0,6	19,5	11,2	0,475	6 300	0,30 YET 206/VL065
	62	48,4	18	39,7	44,1	30,1	0,6	19,5	11,2	0,475	6 300	0,36 YEL 206-2F
	62	48,4	18	39,7	44,1	30,1	0,6	19,5	11,2	0,475	3 900	0,36 YEL 206-2RF/VL065
35	72	38,9	19	46,1	51,1	29,4	1	25,5	15,3	0,655	5 300	0,44 YET 207
	72	38,9	19	46,1	51,1	29,4	1	25,5	15,3	0,655	5 300	0,44 YET 207/VL065
	72	51,1	19	46,1	51,1	32,3	1	25,5	15,3	0,655	5 300	0,55 YEL 207-2F
	72	51,1	19	46,1	51,1	32,3	1	25,5	15,3	0,655	3 200	0,55 YEL 207-2RF/VL065
40	80	43,7	21	51,8	56,5	32,7	1	30,7	19	0,8	4 800	0,59 YET 208
	80	43,7	21	51,8	56,5	32,7	1	30,7	19	0,8	4 800	0,59 YET 208/VL065
	80	56,3	21	51,8	56,5	34,9	1	30,7	19	0,8	4 800	0,67 YEL 208-2F
	80	56,3	21	51,8	56,5	34,9	1	30,7	19	0,8	2 800	0,67 YEL 208-2RF/VL065
45	85	43,7	22	56,8	62	32,7	1	33,2	21,6	0,915	4 300	0,65 YET 209
	85	56,3	22	56,8	62	34,9	1	33,2	21,6	0,915	4 300	0,74 YEL 209-2F
50	90	43,7	22	62,5	67,2	32,7	1	35,1	23,2	0,98	4 000	0,70 YET 210
	90	62,7	22	62,5	67,2	38,1	1	35,1	23,2	0,98	4 000	0,89 YEL 210-2F
55	100	48,4	25	69,1	74,5	36,4	1	43,6	29	1,25	3 600	0,90 YET 211
	100	71,4	25	69,1	74,5	43,6	1	43,6	29	1,25	3 600	1,20 YEL 211-2F
60	110	53,1	26	75,6	82	39,6	1,5	52,7	36	1,53	3 400	1,30 YET 212
	110	77,8	26	75,6	82	46,8	1,5	52,7	36	1,53	3 400	1,60 YEL 212-2F

Y-bearings with an eccentric locking collar, inch shafts
d 1/2 – 2 7/16 in

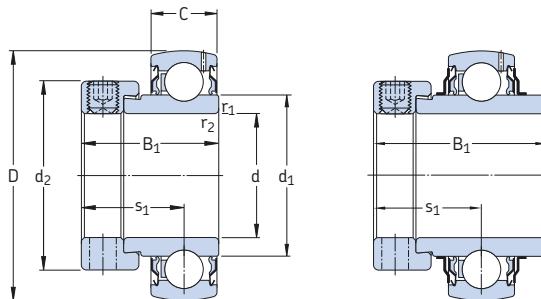


YET

YEL-2F

Dimensions							Basic load ratings	Fatigue load limit	Limiting speed with shaft tolerance h6	Mass	Designation		
d	D	B ₁	C	d ₁	d ₂	s ₁	dynamic C	static C ₀	P _u	r/min	lb/kg	-	
<i>in/mm</i>													
1/2 12,7	1.5748 40	1.47 37,3	0.47 12	0.95 24,2	1.07 27,2	0.92 23,4	0.01 0,3	2 150 9,56	1 070 4,75	45 0,2	9 500 50	0.33 0,15	YEL 203-008-2F
	1.5748 40	1.13 28,6	0.47 12	0.95 24,2	1.07 27,2	0.87 22,1	0.01 0,3	2 150 9,56	1 070 4,75	50 0,2	9 500 50	0.29 0,13	YET 203-008
3/4 19,05	1.8504 47	1.72 43,7	0.55 14	1.11 28,2	1.28 32,4	1.05 26,6	0.02 0,6	2 860 12,7	1 470 6,55	60 0,28	8 500 50	0.44 0,20	YEL 204-012-2F
	1.8504 47	1.22 31	0.55 15	1.11 33,7	1.28 37,4	0.93 23,5	0.02 0,6	2 860 12,7	1 470 6,55	60 0,28	8 500 50	0.38 0,17	YET 204-012
1 25,4	2.0472 52	1.22 31	0.59 15	1.33 33,7	1.47 37,4	0.93 23,5	0.02 0,6	3 150 14	1 760 7,8	80 0,335	7 000 50	0.40 0,18	YET 205-100
	2.0472 52	1.75 44,4	0.59 15	1.33 33,7	1.47 37,4	1.06 26,9	0.02 0,6	3 150 14	1 760 7,8	80 0,335	7 000 50	0.53 0,24	YEL 205-100-2F
1 1/8 28,575	2.4409 62	1.91 48,4	0.71 18	1.56 39,7	1.74 44,1	1.19 30,1	0.02 0,6	4 390 19,5	2 520 11,2	110 0,475	6 300 50	0.86 0,39	YEL 206-102-2F
	2.4409 62	1.41 35,7	0.71 18	1.56 39,7	1.74 44,1	1.05 26,7	0.02 0,6	4 390 19,5	2 520 11,2	110 0,475	6 300 50	0.73 0,33	YET 206-102
1 3/16 30,163	2.4409 62	1.91 48,4	0.71 18	1.56 39,7	1.74 44,1	1.19 30,1	0.02 0,6	4 390 19,5	2 520 11,2	110 0,475	6 300 50	0.82 0,37	YEL 206-103-2F
	2.4409 62	1.41 35,7	0.71 18	1.56 39,7	1.74 44,1	1.05 26,7	0.02 0,6	4 390 19,5	2 520 11,2	110 0,475	6 300 50	0.68 0,31	YET 206-103
1 1/4 31,75	2.8346 72	2.01 51,1	0.75 19	1.82 46,1	2.01 51,1	1.27 32,3	0.04 1	5 740 25,5	3 440 15,3	150 0,655	5 300 50	1.30 0,60	YEL 207-104-2F
	2.4409 62	1.41 35,7	0.71 18	1.56 39,7	1.74 44,1	1.05 26,7	0.02 0,6	4 390 19,5	2 520 11,2	110 0,475	6 300 50	0.64 0,29	YET 206-104
	2.8346 72	1.53 38,9	0.75 19	1.82 46,1	2.01 51,1	1.16 29,4	0.04 1	5 740 25,5	3 440 15,3	150 0,655	5 300 50	1.10 0,51	YET 207-104
1 5/16 33,338	2.8346 72	1.53 38,9	0.75 19	1.82 46,1	2.01 51,1	1.16 29,4	0.04 1	5 740 25,5	3 440 15,3	150 0,655	5 300 50	1.25 0,56	YET 207-105
1 3/8 34,925	2.8346 72	2.01 51,1	0.75 19	1.82 46,1	2.01 51,1	1.27 32,3	0.04 1	5 740 25,5	3 440 15,3	150 0,655	5 300 50	1.20 0,55	YEL 207-106-2F
	2.8346 72	1.53 38,9	0.75 19	1.82 46,1	2.01 51,1	1.16 29,4	0.04 1	5 740 25,5	3 440 15,3	150 0,655	5 300 50	1.05 0,47	YET 207-106


Dimensions								Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass	Designation
d	D	B ₁	C	d ₁	d ₂	s ₁	r _{1,2} min	C	C ₀	P _u	r/min	lb/kg	-
in/mm								lbf/kN		lbf/kN		r/min	
1 7/16 36,513	2,8346 72	2,01 51,1	0,75 19	1,82 46,1	2,01 51,1	1,27 32,3	0,04 1	5 740 25,5	3 440 15,3	150 0,655	5 300	1,15 0,53	YEL 207-107-2F
	2,8346 72	1,53 38,9	0,75 19	1,82 46,1	2,01 51,1	1,16 29,4	0,04 1	5 740 25,5	3 440 15,3	150 0,655	5 300	1,97 0,44	YET 207-107
1 1/2 38,1	3,1496 80	1,72 43,7	0,83 21	2,04 51,8	2,22 56,5	1,29 32,7	0,04 1	6 910 30,7	4 280 19	180 0,8	4 800	1,40 0,63	YET 208-108
	3,1496 80	2,22 56,3	0,83 21	2,04 51,8	2,22 56,5	1,37 34,9	0,04 1	6 910 30,7	4 280 19	180 0,8	4 800	1,70 0,77	YEL 208-108-2F
1 11/16 42,863	3,3465 85	2,22 56,3	0,87 22	2,24 56,8	2,44 62	1,37 34,9	0,04 1	7 470 33,2	4 860 21,6	210 0,915	4 300	1,95 0,88	YEL 209-111-2F
	3,3465 85	1,72 43,7	0,87 22	2,24 56,8	2,44 62	1,29 32,7	0,04 1	7 470 33,2	4 860 21,6	210 0,915	4 300	1,65 0,74	YET 209-111
1 3/4 44,445	3,3465 85	2,22 56,3	0,87 22	2,24 56,8	2,44 62	1,37 32,7	0,04 1	7 470 33,2	4 860 21,6	210 0,915	4 300	1,75 0,80	YEL 209-112-2F
	3,3465 85	1,72 43,7	0,87 22	2,24 56,8	2,44 62	1,29 32,7	0,04 1	7 470 33,2	4 860 21,6	210 0,915	4 300	1,55 0,70	YET 209-112
1 15/16 49,213	3,5433 90	2,47 62,7	0,87 22	2,46 62,5	2,65 67,2	1,50 38,1	0,04 1	7 900 35,1	5 220 23,2	220 0,98	4 000	2,05 0,94	YEL 210-115-2F
2 50,8	3,9370 100	2,81 71,4	0,98 25	2,72 69,1	2,93 74,5	1,72 43,6	0,04 1	9 810 43,6	6 530 29	280 1,25	3 600	3,30 1,50	YEL 211-200-2F
2 3/16 55,563	3,9370 100	2,81 71,4	0,98 25	2,72 69,1	2,93 74,5	1,72 43,6	0,04 1	9 810 43,6	6 530 29	280 1,25	3 600	2,85 1,30	YEL 211-203-2F
2 7/16 61,913	4,3307 110	3,06 77,8	1,02 26	2,98 75,6	3,23 82	1,84 46,8	0,06 1,5	11 860 52,7	8 100 36	340 1,53	3 400	3,75 1,70	YEL 212-207-2F
	4,3307 110	2,09 53,1	1,02 26	2,98 75,6	3,23 82	1,84 46,8	0,06 1,5	11 860 52,7	8 100 36	340 1,53	3 400	2,65 1,20	YET 212-207

Y-bearings with a tapered bore on an adapter sleeve, metric shafts
d 20 – 60 mm



Dimensions						Basic load ratings		Fatigue load limit P_u	Limiting speed with shaft tolerance h_6	Mass Bearing + sleeve	Designations	
d	D	B	B ₁	C	s ₁	C _{dynamic}	C _{static}				Bearing	Adapter sleeve
mm						kN		kN	r/min	kg	–	
20	52	24	35	15	20	14	7,8	0,335	7 000	0,22	YSA 205-2FK	H 2305
25	62	28	38	18	22	19,5	11,2	0,475	6 300	0,33	YSA 206-2FK	H 2306
30	72	30,5	43	19	24,3	25,5	15,3	0,655	5 300	0,47	YSA 207-2FK	H 2307
35	80	33,9	46	21	27	30,7	19	0,8	4 800	0,69	YSA 208-2FK	H 2308
40	85	35	50	22	28,5	33,2	21,6	0,915	4 300	0,77	YSA 209-2FK	H 2309
45	90	37	55	22	30,5	35,1	23,2	0,98	4 000	0,88	YSA 210-2FK	H 2310
50	100	40	59	25	32,5	43,6	29	1,25	3 600	1,10	YSA 211-2FK	H 2311
55	110	42,5	62	26	34,3	52,7	36	1,53	3 400	1,40	YSA 212-2FK	H 2312
60	120	43,5	65	27	35,8	57,2	40	1,7	3 000	1,70	YSA 213-2FK	H 2313


Y-bearings with a tapered bore on an adapter sleeve, inch shafts
d 3/4 – 2 3/8 in



Dimensions						Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass Bearing + sleeve	Designations	Adapter sleeve
d	D	B	B ₁	C	s ₁	dyn. C	stat. C ₀	lbf/kN P _u	r/min	lb/kg	–	
in/mm						lbf/kN		lbf/kN				
3/4 19,05	2.0472 52	0.95 24	1.38 35	0.59 15	0.79 20	3 150 14	1 760 7,8	80 0,335	7 000	0.49 0,22	YSA 205-2FK	HE 2305
15/16 23,813	2.4409 62	1.10 28	1.50 38	0.71 18	0.87 22	4 390 20	2 520 11,2	110 0,475	6 300	0.77 0,35	YSA 206-2FK	HA 2306
1 25,4	2.4409 62	1.10 28	1.50 38	0.71 18	0.87 22	4 390 20	2 520 11,2	110 0,475	6 300	0.73 0,33	YSA 206-2FK	HE 2306
1 3/16 30,163	2.8346 72	1.20 30,5	1.69 43	0.75 19	0.96 24,3	5 740 26	3 440 15,3	150 0,655	5 300	1.05 0,47	YSA 207-2FK	HA 2307
1 1/4 31,75	3.1496 80	1.34 33,9	1.81 46	0.83 21	1.06 27	6 910 31	4 280 19	180 0,8	4 800	1.50 0,69	YSA 208-2FK	HE 2308
1 7/16 36,513	3.3465 85	1.38 35	1.97 50	0.87 22	1.12 28,5	7 470 33	4 860 21,6	210 0,915	4 300	1.80 0,81	YSA 209-2FK	HA 2309
1 1/2 38,1	3.3465 85	1.38 35	1.97 50	0.87 28,5	1.12 33	7 470 21,6	4 860 0,915	210 4 300	1.70 1.70 0,77	0,77	YSA 209-2FK	HE 2309
1 5/8 41,275	3.5433 90	1.46 37	2.17 55	0.87 22	1.20 30,5	7 900 35	5 220 23,2	220 0,98	4 000	2.05 0,94	YSA 210-2FK	HS 2310
1 11/16 42,863	3.5433 90	1.46 37	2.17 55	0.87 22	1.20 30,5	7 900 35	5 220 23,2	220 0,98	4 000	2 0,91	YSA 210-2FK	HA 2310
1 3/4 44,45	3.5433 90	1.46 37	2.17 55	0.87 22	1.20 30,5	7 900 35	5 220 23,2	220 0,98	4 000	1.95 0,88	YSA 210-2FK	HE 2310
1 15/16 49,213	3.937 100	1.58 40	2.32 59	0.98 25	1.28 32,5	9 810 44	6 530 29	280 1,25	3 600	2.45 1,10	YSA 211-2FK	HA 2311
2 50,800	3.937 100	1.58 40	2.32 59	0.98 25	1.28 32,5	9 810 44	6 530 29	280 1,25	3 600	2.45 1,10	YSA 211-2FK	HE 2311 B
2 1/8 53,975	4.3307 110	1.67 42,5	2.44 62	1.02 26	1.35 34,3	11 860 53	8 100 36	340 1,53	3 400	3.10 1,40	YSA 212-2FK	HS 2312
2 3/16 55,563	4.7244 120	1.71 43,5	2.56 65	1.06 27	1.41 35,8	12 870 57	9 000 40	380 1,7	3 000	4.20 1,90	YSA 213-2FK	HA 2313

Dimensions						Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass Bearing + sleeve	Designations	
d	D	B	B ₁	C	s ₁	dyn. C	stat C ₀	P _u	r/min	lb/kg	Bearing	Adapter sleeve
in/mm						lbf/kN		lbf/kN		lb/kg		–
2 1/4 57,15	4.7244 120	1.71 43,5	2.56 65	1.06 27	1.41 35,8	12 870 57	9 000 40	380 1,7	3 000	3.95 1,80	YSA 213-2FK	HE 2313
2 3/8 60,325	4.7244 120	1.71 43,5	2.56 65	1.06 27	1.41 35,8	12 870 57	9 000 40	380 1,7	3 000	3.75 1,70	YSA 213-2FK	HS 2313


Y-bearings with a standard inner ring, metric shafts
d 17 – 60 mm



Dimensions					Basic load ratings		Fatigue load limit	Limiting speed	Mass	Designation
d	D	B	d ₁	r _{1,2} min	C	C ₀	P _u			
mm					kN		kN	r/min	kg	–
17	40	12	24,2	0,6	9,56	4,75	0,2	12 000	0,056	1726203-2RS1
20	47	14	28,5	1	12,7	6,55	0,28	10 000	0,095	1726204-2RS1
25	52	15	34	1	14	7,8	0,335	8 500	0,11	1726205-2RS1
	62	17	36,6	1,1	22,5	11,6	0,49	7 500	0,20	1726305-2RS1
30	62	16	40,3	1	19,5	11,2	0,475	7 500	0,18	1726206-2RS1
	72	19	44,6	1,1	28,1	16	0,67	6 300	0,30	1726306-2RS1
35	72	17	46,9	1,1	25,5	15,3	0,655	6 300	0,25	1726207-2RS1
	80	21	49,6	1,5	33,2	19	0,815	6 000	0,40	1726307-2RS1
40	80	18	52,6	1,1	30,7	19	0,8	5 600	0,32	1726208-2RS1
	90	23	56,1	1,5	41	24	1	5 000	0,55	1726308-2RS1
45	85	19	57,6	1,1	33,2	21,6	0,915	5 000	0,37	1726209-2RS1
	100	25	62,1	1,5	52,7	31,5	1,34	4 500	0,73	1726309-2RS1
50	90	20	62,5	1,1	35,1	23,2	0,98	4 800	0,41	1726210-2RS1
	110	27	68,7	2	61,8	38	1,6	4 300	0,95	1726310-2RS1
55	100	21	69	1,5	43,6	29	1,25	4 300	0,54	1726211-2RS1
60	110	22	75,5	1,5	52,7	36	1,53	4 000	0,70	1726212-2RS1

2.4

**Y-bearings with a hexagonal bore, inch shafts
a $1\frac{1}{8}$ – $1\frac{1}{2}$ in**

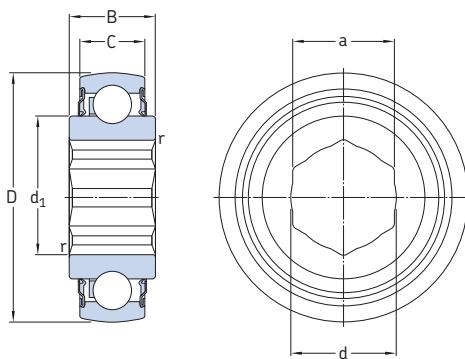

Dimensions							Basic load ratings		Fatigue load limit	Limiting speed	Mass	Designation	
a	d	D	B	C	d ₁	r	C _{dynamic}	C _{0static}	P _u	r/min	lb/kg	–	
in/mm													
$1\frac{1}{8}$ 28,575	1.15 29,3	2.8346 72	0.98 25	0.75 19	1.82 46,1	0.02 0,4	4 390 19,5	2 520 11,2	110 0,475	500	0.83 0,38	YHC 207-102-2LS8W/VT357	
$1\frac{1}{4}$ 31,75	1.28 32,5	2.8346 72	0.98 25	0.75 19	1.82 46,1	0.03 0,73	4 390 19,5	2 520 11,2	110 0,475	500	0.77 0,35	YHC 207-104-2LS8W/VT357	
$1\frac{1}{2}$ 38,1	1.54 39	3.3465 85	1.18 30	0.87 22	2.24 56,8	0.02 0,4	7 470 33,2	4 860 21,6	210 0,915	500	1.30 0,58	YHC 209-108-2LS8W/VT357	
		1.54 39	3.5433 90	1.18 30	0.87 22	2.46 62,5	0.02 0,4	7 900 35,1	5 220 23,2	220 0,98	500	1.75 0,79	YHC 210-108-2LS8W/VT357

2.5



Y-bearing plummer block units

3

Designs	112
Y-TECH plummer block units	113
Y-bearing plummer block units with a cast housing	113
Y-bearing plummer block units with a pressed steel housing	116
Data – general	116
Dimensions	116
Tolerances	117
Radial internal clearance	117
Materials	117
Load carrying ability of the housings	117
End covers	118
Attaching to a support surface	118
Grease fills	118
Mounting	118
Product tables	120
3.1 Y-TECH plummer block units with grub screws, metric shafts	120
metric shafts	122
inch shafts	126
3.3 Y-bearing plummer block units with a cast housing and an eccentric locking collar metric shafts	134
inch shafts	136
3.4 Y-bearing plummer block units with a cast housing and an adapter sleeve, metric shafts	142
inch shafts	144
3.5 Y-bearing plummer block units with a shortened cast housing and grub screws, metric shafts	148
3.6 Y-bearing plummer block units with a shortened cast housing and an eccentric locking collar, metric shafts	150
3.7 Y-bearing plummer block units with a pressed steel housing and grub screws, metric shafts	152
inch shafts	156
3.8 Y-bearing plummer block units with a pressed steel housing and an eccentric locking collar, metric shafts	158
inch shafts	160
SKF	111

Designs

SKFY-bearing plummer (pillow) block units are available as standard in a wide variety of designs. The standard assortment includes plummer block units with housings made of:

- composite material (→ **fig. 1**) referred to as Y-TECH plummer block units
- grey cast iron (→ **fig. 2**)
- pressed sheet steel (→ **fig. 3**)

They are located on the shaft via the inner ring of the insert bearing with either:

- grub (set) screws
- an eccentric locking collar
- an adapter sleeve

The Y-bearing can be sealed with either:

- the standard integral seal
- the standard integral seal and an additional flinger
- the highly efficient multiple seal

Additional information about Y-bearings can be found in the section *Y-bearings*, starting on **page 79**.

Y-bearing plummer block units available from stock are listed in the product tables. Other units can be composed by ordering the parts separately. The table on **pages 114** and **115** shows the wide variety of combinations of Y-bearings and Y-bearing housings.



Fig. 1



Fig. 2



Fig. 3

Y-TECH plummer block units

Y-TECH plummer block units have housings made of composite material. They were developed for bearing arrangements that must operate reliably in difficult environments for extended periods without maintenance.

Y-TECH plummer block units in the SYK series are fitted with Y-bearings in the YAR 2-2F or YAR 2-2RF series and are attached to the shaft with grub screws (→ fig. 4). These units are part of the standard SKF product range.

For additional information about Y-TECH plummer block units for the food industry, refer to **page 274**.

Y-bearing plummer block units with a cast housing

Y-bearing plummer block units with a grey cast iron housing can be relubricated through a grease fitting in the housing. This makes them especially suitable for bearing arrangements that operate under any of the following conditions:

- high levels of contamination
- high speeds
- high temperatures
- relatively heavy loads

Four different housing designs are available:

- SY(J) series with two oblong holes for the attachment bolts in the base of the housing (→ fig. 5)
- SYH series, which is similar to the SY series, but with a lower centre height
- SYM series, which is similar to the SY series, but accommodates a larger bearing for a given shaft size, resulting in a greater load carrying capacity
- SYF(J) series with a shortened base that contains two threaded holes in the support base (→ fig. 6)

Fig. 4



3






Fig. 5






Fig. 6



Y-bearing plummer block units

Y-bearing unit	Y-bearing housings					
						
Y-bearings	SYK 5(00)	SY 5(00)	SYJ 5(00)	SYH 5(00)	SYM 5(00)	SYF 5(00)
YAR 2-2F 	SYK .. TF 20–40 mm	SY .. TF 12–65 mm 1/2–2 15/16 in.	SYJ .. TF 20–100 mm 3/4–2 1/2 in.	SYH .. TF 1/2–2 7/16 in.	SYM .. TF 1 7/16–3 in.	SYF .. TF 20–50 mm 3/4–1 3/4 in. ¹⁾
YAR 2-2RF 	SYK .. TR 20–40 mm	SY .. TR 20–60 mm 3/4–2 1/2 in. ¹⁾	20–65 mm ¹⁾ 3/4–2 1/2 in. ¹⁾	–	–	20–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾
YAR 2-2RF/HV 	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	–	–	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YAR 2-2RF/ VE495 	20–40 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾	–	–	20–40 mm ¹⁾
YAT 2 	20–40 mm ¹⁾	17–50 mm ¹⁾	20–50 mm ¹⁾	–	–	20–50 mm ¹⁾
YEL 2-2F 	20–40 mm ¹⁾	SY .. WF 20–60 mm 1 7/16–1 15/16 in.	20–60 mm ¹⁾	SYH .. WF 3/4–2 7/16 in.	–	20–50 mm ¹⁾
YEL 2-2RF/ VL065 	20–40 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾	–	–	20–40 mm ¹⁾
YET 2 	20–40 mm ¹⁾	SY .. FM 15–60 mm 3/4–1 1/2 in. ¹⁾	20–60 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	SYH .. FM 1–2 in.	–	SYF .. FM 20–50 mm 3/4–1 1/2 in. ¹⁾
YSA 2-2FK on adapter sleeve 	20–35 mm ¹⁾ 3/4–1 1/4 in. ¹⁾	20–60 mm ¹⁾ 3/4–2 3/8 in. ¹⁾	SYJ .. KF 20–60 mm 3/4–2 3/8 in.	–	–	20–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾
17262(00) 	20–40 mm ¹⁾	17–60 mm ¹⁾	20–60 mm ¹⁾	–	–	20–50 mm ¹⁾

¹⁾ Parts must be ordered separately.

Y-bearing unit	Y-bearing housings	
		
Y-bearings	SYFJ 5(00)	P 40–P 85
YAR 2-2F 	SYFJ .. TF 20–50 mm 3/4–1 3/4 in. ¹⁾	12–45 mm ¹⁾ 1/2–1 3/4 in. ¹⁾
YAR 2-2RF 	20–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	12–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾
YAR 2-2RF/HV 	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YAR 2-2RF/VE495 	20–40 mm ¹⁾	20–40 mm ¹⁾
YAT 2 	20–50 mm ¹⁾	17–45 mm ¹⁾ 5/8–1 3/4 in. ¹⁾
YEL 2-2F 	20–50 mm ¹⁾	12–45 mm ¹⁾ 1/2–1 3/4 in. ¹⁾
YEL 2-2RF/VL065 	20–40 mm ¹⁾	20–40 mm ¹⁾
YET 2 	SYFJ .. FM 20–50 mm 3/4–1 1/2 in. ¹⁾	15–45 mm ¹⁾ 1/2–1 3/4 in. ¹⁾
YSA 2-2FK on adapter sleeve 	12–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
17262(00) 	20–50 mm ¹⁾	17–45 mm ¹⁾

¹⁾ Parts must be ordered separately.

Y-bearing plummer block units with a pressed steel housing

Y-bearing plummer block units (→ fig. 7) with a pressed steel housing are designed for simple applications with limited loads and speeds. The two-part housing, which has no provision for relubrication, is ordered separately from the insert bearing. The individual items that make up a Y-bearing unit are:

- the two-part housing
- the Y-bearing
- the rubber seating ring, if needed

The advantage of ordering individual components is that a large number of combinations are possible.

Rubber seating rings made of acrylonitrile-butadiene rubber in the RIS 2 series (→ fig. 8) are available for these Y-bearing plummer blocks and are meant to reduce running noise and dampen vibration. The rubber seating rings also enable the bearings to be displaced slightly in their housings, for example, to accommodate shaft elongation.

Y-bearing units with a rubber seating ring are also listed in the product tables. Detailed information about rubber seating rings can be found in the section *Design of Y-bearing arrangements* on pages 45 and 46.

Data – general

Dimensions

The boundary dimensions of most Y-bearing plummer block housings are in accordance with the following standards:

- Housings in the SY 5(00) M series are in accordance with ISO 3228:1993.
- Housings in the SY 5(00) U series are in accordance with ISO 3228:1993, except the centre height H_1 , which deviates for several housing sizes.
- Housings in the SYH series are in accordance with ISO 3228:1993, except the centre height H_1 , which is lower than the standard.

Fig. 7



Fig. 8



- Housings in the SYJ series are in accordance with JIS B 1559-1995.
- Housings in the P series are in accordance with ISO 3228:1993, except the centre height H_1 , which deviates slightly.

Y-bearing plummer block housings in the SYF, SYFJ and SYM series have not been standardized either nationally or internationally, but are common in the marketplace.

Tolerances

The tolerance for the shaft centre height H_1 (→ fig. 9) is

- $\pm 0,25$ mm for plummer block units with a bearing bore diameter ≤ 40 mm, except for units in the SYK series, where the tolerance is $+\/- 0,31$ mm
- $\pm 0,30$ mm for the larger plummer block units.

For Y-bearing plummer block units with composite or cast housings, the outside diameter of the bearing is matched to the diameter of the housing bore so that the outer ring is prevented from turning in its seat, but still able to compensate for misalignment.

Additional information about tolerances for the inner ring bore are listed in the section *Y-bearings* on page 89.

Radial internal clearance

The Y-bearing used in a Y-bearing plummer block unit has the same radial internal clearance as a similarly sized individual Y-bearing.

Additional information about the radial internal clearance can be found in the section *Y-bearings* on page 90.

Materials

Composite housings

Y-housings in the SYK series are made of injection moulded glass fibre reinforced polyamide 6. A steel coil embedded in the housing adds greater stability to the form of the housing, even if operating temperatures are elevated.


The housing bolt holes are reinforced with zinc-plated sheet steel inserts. The standard housing colour is black.

Cast housings

Housings in the SY(J), SYH, SYM and SYF(J) series are manufactured from grey cast iron EN-GJL HB195 in accordance with EN 1561:1997.

Pressed steel housings

Pressed steel housings in the P series are made from cold-rolled sheet steel and are zinc-coated for corrosion protection.

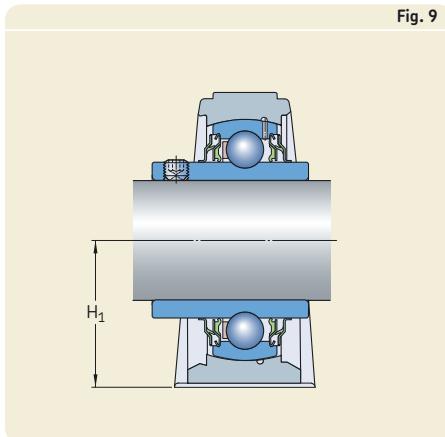

Load carrying ability of the housings

Housings made of composite material or grey cast iron are able to withstand the same dynamic and static loads as the Y-bearings they incorporate. These Y-bearing units can also be used in applications where shock loads or variable axial loads occur.

If SKFY-bearing units are to be used in an application where health, safety, or the environment is at risk, contact the SKF application engineering service during the design phase.

Pressed steel housings have a lower load carrying capacity than their insert bearings. Permissible radial loads are specified in the product tables. The axial load should not exceed 20% of the permissible radial load.

If the bearing arrangement will be subjected to shock loads or variable axial loads, Y-bearing units with a cast or Y-TECH housing should always be used.

Y-bearing plummer block units

End covers

To protect the shaft ends and avoid contact to rotating shaft ends, end covers are available for composite and cast Y-bearing plummer block units (**→ fig. 10**).

In the product tables, end covers in the ECY 2 series are shown together with the appropriate bearing unit. The designation of the end cover is listed together with the distance that the end cover protrudes from the housing.

For additional information about end covers, refer to the section *Design of Y-bearing arrangements* on page 47.

Attaching to a support surface

Plummer block units have two bolt holes in the housing base through which they can be attached to their support surface with threaded fasteners. The bolt holes vary for different housings. Housings made of:

- composite material have oblong bolt holes, reinforced with zinc-coated sheet steel or stainless steel inserts
- grey cast iron – SY(J), SYH and SYM series – have cast oblong bolt holes
- grey cast iron – SYF and SYFJ series – have threaded holes in the support base
- pressed steel have round bolt holes

If the loads acting on a housing are between 55° and 120° (**→ fig. 11**), Y-TECH bearing units and SY(J), SYH and SYM plummer block units should be doweled to the support surface or stops should be provided in the direction of the load.

Recommendations for the position and size of the dowel pin holes for SY, SYJ and SYH series housings are provided in **table 1**.

Grease fills

With the exception of SKF Y-bearing units for the food industry, all standard SKF Y-bearing plummer block units are filled with a high-quality, long-lasting grease containing a lithium-calcium thickener that has a consistency of 2 on the NLGI scale.

For additional information about lubricants and lubrication, refer to the section *Lubrication and maintenance*, starting on page 48.

Fig. 10





Fig. 11

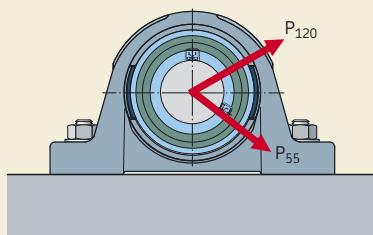


Mounting

The procedure for mounting a Y-bearing plummer block unit depends on:

- the design of the housing
- the method used to attach the unit to the shaft


These methods are described in detail in the section *Mounting instructions*, starting on page 52.

Position and size of dowel pin holes for Y-bearing plummer block housings made of grey cast iron

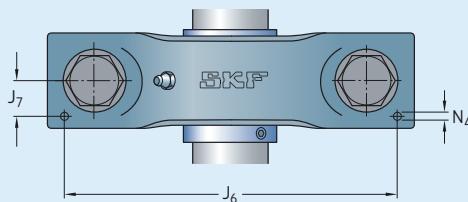

Housing size	Dimensions for housings in the SVJ series			SY, SYH series		
	J ₆	J ₇	N ₄	J ₆	J ₇	N ₄
— mm						
503	—	—	—	118	11,5	2
504	118	12,5	2	118	11,5	2
505	130	14	2	120	13	2
506	155	15	2	140	14	2
507	153	16	4	146	15,5	4
508	170	17,5	4	161	17	4
509	174	18	4	173	17	4
510	190	21	5	187	19	5
511	201	21	5	201	21	5
512	223	23,5	5	222	21	5
513	241	23	5	238	22,5	5
514	246	26	6	240	22,5	6
515	255	27	6	—	—	—
516	270	28	6	285	29	6
518	303	32	8	—	—	—
520	352	33,5	8	—	—	—


Y-TECH plummer block units with grub screws, metric shafts
d 20 – 40 mm

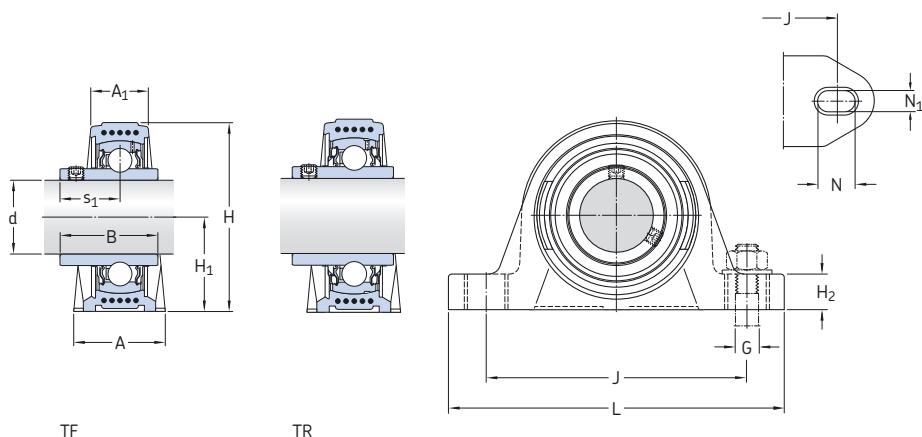

TF


TR

Dimensions	d	A	A ₁	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Basic load ratings		Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Designation Bearing unit
														C	C ₀			
	mm														kN	kN	r/min	–
20	32	21	31	64	33,3	16	96	126	17,5	12	10	18,3		12,7	6,55	0,28	8 500	SYK 20 TF
	32	21	31	64	33,3	16	96	126	17,5	12	10	18,3		12,7	6,55	0,28	5 000	SYK 20 TR
25	32	22	34,1	70,5	36,5	16	105	134	17,5	12	10	19,8		14	7,8	0,335	7 000	SYK 25 TF
	32	22	34,1	70,5	36,5	16	105	134	17,5	12	10	19,8		14	7,8	0,335	4 300	SYK 25 TR
30	40	25	38,1	82	42,9	19	121	159	21,5	14,5	12	22,2		19,5	11,2	0,475	6 300	SYK 30 TF
	40	25	38,1	82	42,9	19	121	159	21,5	14,5	12	22,2		19,5	11,2	0,475	3 800	SYK 30 TR
35	45	27	42,9	93	47,6	19	126	164	21,5	14,5	12	25,4		25,5	15,3	0,655	5 300	SYK 35 TF
	45	27	42,9	93	47,6	19	126	164	21,5	14,5	12	25,4		25,5	15,3	0,655	3 200	SYK 35 TR
40	48	30	49,2	99	49,2	19	136	176	21,5	14,5	12	30,2		30,7	19	0,8	4 800	SYK 40 TF
	48	30	49,2	99	49,2	19	136	176	21,5	14,5	12	30,2		30,7	19	0,8	2 800	SYK 40 TR



Designations			Mass	Appropriate end cover	
Bearing unit	Separate components		Bearing unit	Designation	Dimension
-	Housing	Bearing	kg	-	mm
SYK 20 TF	SYK 504	YAR 204-2F	0,24	ECY 204	18,5
SYK 20 TR	SYK 504	YAR 204-2RF	0,24	ECY 204	18,5
SYK 25 TF	SYK 505	YAR 205-2F	0,29	ECY 205	18
SYK 25 TR	SYK 505	YAR 205-2RF	0,29	ECY 205	18
SYK 30 TF	SYK 506	YAR 206-2F	0,49	ECY 206	20
SYK 30 TR	SYK 506	YAR 206-2RF	0,49	ECY 206	20
SYK 35 TF	SYK 507	YAR 207-2F	0,66	ECY 207	22
SYK 35 TR	SYK 507	YAR 207-2RF	0,66	ECY 207	22
SYK 40 TF	SYK 508	YAR 208-2F	0,86	ECY 208	23,5
SYK 40 TR	SYK 508	YAR 208-2RF	0,86	ECY 208	23,5


**Y-bearing plummer block units with a cast housing and grub screws, metric shafts
d 12 – 60 mm**

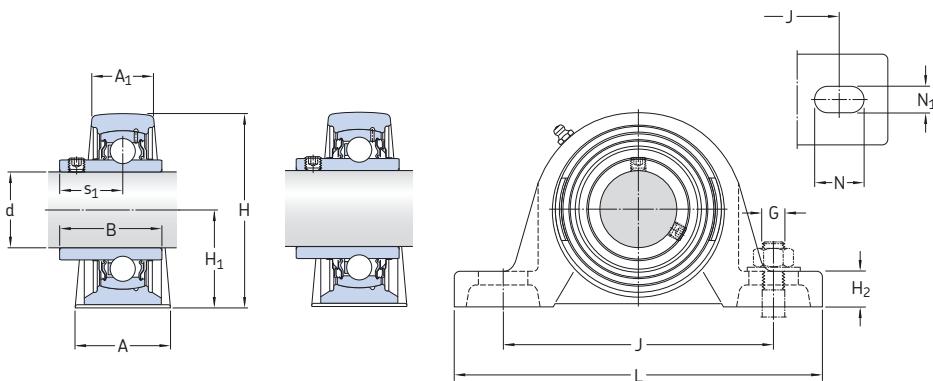

TF


TR

Dimensions													Basic load ratings dynamic C	Basic load ratings static C_0	Fatigue load limit P_u	Limiting speed with shaft tolerance h6	Designation Bearing unit
d	A	A ₁	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁					
mm													kN		kN		r/min
12	32	18	27,4	57	30,2	14	97	127	20,5	11,5	10	15,9	9,56	4,75	0,2	9 500	SY 12 TF
15	32	18	27,4	57	30,2	14	97	127	20,5	11,5	10	15,9	9,56	4,75	0,2	9 500	SY 15 TF
17	32	18	27,4	57	30,2	14	97	127	20,5	11,5	10	15,9	9,56	4,75	0,2	9 500	SY 17 TF
20	32	21	31	65	33,3	14	97	127	20,5	11,5	10	18,3	12,7	6,55	0,28	8 500	SY 20 TF
	34	23	31	65	33,3	14	97	127	20,7	13	10	18,3	12,7	6,55	0,28	8 500	SYJ 20 TF
	32	21	31	65	33,3	14	97	127	20,5	11,5	10	18,3	12,7	6,55	0,28	5 000	SY 20 TR
25	36	22	34,1	70,5	36,5	16	102	130	19,5	11,5	10	19,8	14	7,8	0,335	7 000	SY 25 TF
	38	24	34,1	70,5	36,5	16	102,5	140	21,5	13	10	19,8	14	7,8	0,335	7 000	SYJ 25 TF
	36	22	34,1	70,5	36,5	16	102	130	19,5	11,5	10	19,8	14	7,8	0,335	4 300	SY 25 TR
30	40	25	38,1	82,5	42,9	17	117,5	152	23,5	14	12	22,2	19,5	11,2	0,475	6 300	SY 30 TF
	42	27	38,1	82,5	42,9	16	118	165	24	17	14	22,2	19,5	11,2	0,475	6 300	SYJ 30 TF
	40	25	38,1	82,5	42,9	17	117,5	152	23,5	14	12	22,2	19,5	11,2	0,475	3 800	SY 30 TR
35	45	27	42,9	93	47,6	19	126	160	21	14	12	25,4	25,5	15,3	0,655	5 300	SY 35 TF
	46	28	42,9	93	47,6	17	129	167	24	17	14	25,4	25,5	15,3	0,655	5 300	SYJ 35 TF
	45	27	42,9	93	47,6	19	126	160	21	14	12	25,4	25,5	15,3	0,655	3 200	SY 35 TR
40	48	30	49,2	99	49,2	19	135,5	175	24,5	14	12	30,2	30,7	19	0,8	4 800	SY 40 TF
	49	31	49,2	99	49,2	18	136,5	184	25,5	17	14	30,2	30,7	19	0,8	4 800	SYJ 40 TF
	48	30	49,2	99	49,2	19	135,5	175	24,5	14	12	30,2	30,7	19	0,8	2 800	SY 40 TR
45	48	32	49,2	107,5	54	21	143,5	187	22,5	14	12	30,2	33,2	21,6	0,915	4 300	SY 45 TF
	52	36	49,2	107,5	54	20	143,5	190	23,5	17	14	30,2	33,2	21,6	0,915	4 300	SYJ 45 TF
	48	32	49,2	107,5	54	21	143,5	187	22,5	14	12	30,2	33,2	21,6	0,915	2 400	SY 45 TR
50	54	34	51,6	114,5	57,2	22	157	203	26	18	16	32,6	35,1	23,2	0,98	4 000	SY 50 TF
	58	38	51,6	114,5	57,2	22	157,5	206	26,5	20	16	32,6	35,1	23,2	0,98	4 000	SYJ 50 TF
	54	34	51,6	114,5	57,2	22	157	203	26	18	16	32,6	35,1	23,2	0,98	2 200	SY 50 TR
55	60	40	55,6	126	63,5	24	171,5	219	27,5	18	16	33,4	43,6	29	1,25	3 600	SY 55 TF
	60	40	55,6	126	63,5	24	171,5	219	27,5	20	16	33,4	43,6	29	1,25	3 600	SYJ 55 TF
	60	40	55,6	126	63,5	24	171,5	219	27,5	18	16	33,4	43,6	29	1,25	1 900	SY 55 TR
60	60	42	65,1	138	69,8	26,5	190,5	240	29,5	18	16	39,7	52,7	36	1,53	3 400	SY 60 TF
	65	47	65,1	138	69,8	26,5	188,5	241	29,5	20	16	39,7	52,7	36	1,53	3 400	SYJ 60 TF
	60	42	65,1	138	69,8	26,5	190,5	240	29,5	18	16	39,7	52,7	36	1,53	1 800	SY 60 TR




Designations Bearing unit	Separate components		Mass Bearing unit	Appropriate end cover Designation	Dimension
			kg	–	mm
SY 12 TF	SY 503 M	YAR 203/12-2F	0,52	–	–
SY 15 TF	SY 503 M	YAR 203/15-2F	0,51	–	–
SY 17 TF	SY 503 M	YAR 203-2F	0,50	–	–
SY 20 TF	SY 504 M	YAR 204-2F	0,57	ECY 204	18,5
SYJ 20 TF	SYJ 504	YAR 204-2F	0,55	–	–
SY 20 TR	SY 504 M	YAR 204-2RF	0,57	ECY 204	18,5
SY 25 TF	SY 505 M	YAR 205-2F	0,72	ECY 205	18
SYJ 25 TF	SYJ 505	YAR 205-2F	0,73	–	–
SY 25 TR	SY 505 M	YAR 205-2RF	0,72	ECY 205	18
SY 30 TF	SY 506 M	YAR 206-2F	1,10	ECY 206	20
SYJ 30 TF	SYJ 506	YAR 206-2F	1,05	–	–
SY 30 TR	SY 506 M	YAR 206-2RF	1,10	ECY 206	20
SY 35 TF	SY 507 M	YAR 207-2F	1,45	ECY 207	22
SYJ 35 TF	SYJ 507	YAR 207-2F	1,50	–	–
SY 35 TR	SY 507 M	YAR 207-2RF	1,45	ECY 207	22
SY 40 TF	SY 508 M	YAR 208-2F	1,80	ECY 208	23,5
SYJ 40 TF	SYJ 508	YAR 208-2F	1,85	–	–
SY 40 TR	SY 508 M	YAR 208-2RF	1,80	ECY 208	23,5
SY 45 TF	SY 509 M	YAR 209-2F	2,20	ECY 209	23
SYJ 45 TF	SYJ 509	YAR 209-2F	2,40	–	–
SY 45 TR	SY 509 M	YAR 209-2RF	2,20	ECY 209	23
SY 50 TF	SY 510 M	YAR 210-2F	2,70	ECY 210	29,5
SYJ 50 TF	SYJ 510	YAR 210-2F	2,95	–	–
SY 50 TR	SY 510 M	YAR 210-2RF	2,70	ECY 210	29,5
SY 55 TF	SY 511 M	YAR 211-2F	3,60	ECY 211	34
SYJ 55 TF	SYJ 511	YAR 211-2F	3,70	–	–
SY 55 TR	SY 511 M	YAR 211-2RF	3,60	ECY 211	34
SY 60 TF	SY 512 M	YAR 212-2F	4,45	ECY 212	35,5
SYJ 60 TF	SYJ 512	YAR 212-2F	4,85	–	–
SY 60 TR	SY 512 M	YAR 212-2RF	4,45	ECY 212	35,5

Y-bearing plummer block units with a cast housing and grub screws, metric shafts
d 65 – 100 mm

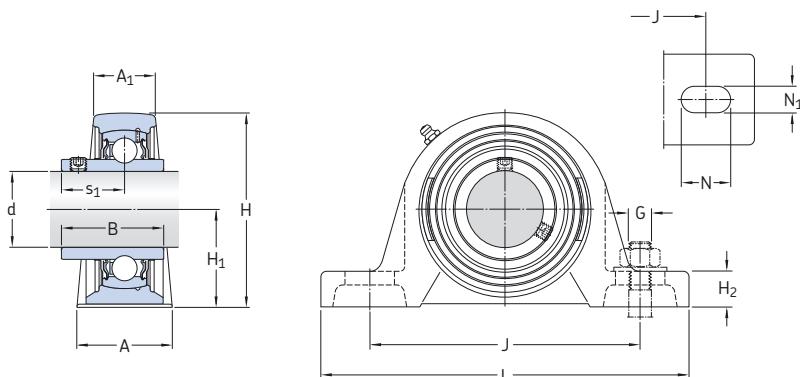


TF

Dimensions	d	A	A ₁	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Basic load ratings		Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Designation Bearing unit
														dynamic C	static C ₀			
	mm													kN	kN	r/min	–	
65	65 70	44 49	68,3 68,3	151 151	76,2 76,2	29 27	203 203	257 265	35 35	22 25	20 20	42,9 42,9	57,2 57,2	40 40	1,7 1,7	3 000 3 000	SY 65 TF SYJ 65 TF	
70	72	46	69,9	156	79,4	27	210	266	30	25	20	39,7	62,4	45	1,86	2 800	SYJ 70 TF	
75	74	54	73,1	166	82,5	28	217	275	30	25	20	46,1	66,3	49	2,04	2 600	SYJ 75 TF	
80	78	50	77,9	176	88,9	30	232	292	35	25	20	47,7	72,8	53	2,16	2 400	SYJ 80 TF	
90	88	54	89	201	101,6	33	262	327	35	27	22	54	95,6	72	2,7	2 000	SYJ 90 TF	
100	95	57	98,4	226	115	38	308	380	48	26	24	63,4	124	93	3,35	1 900	SYJ 100 TF	



Designations			Mass	Appropriate end cover	
Bearing unit	Separate components		Bearing unit	Designation	Dimension
	Housing	Bearing		A5	
–	–	–	kg	–	mm
SY 65 TF	SY 513 M	YAR 213-2F	5,70	ECY 213	35,5
SYJ 65 TF	SYJ 513	YAR 213-2F	6,15	–	–
SYJ 70 TF	SYJ 514	YAR 214-2F	6,20	–	–
SYJ 75 TF	SYJ 515	YAR 215-2F	7,30	–	–
SYJ 80 TF	SYJ 516	YAR 216-2F	9,70	–	–
SYJ 90 TF	SYJ 518	YAR 218-2F	14,0	–	–
SYJ 100 TF	SYJ 520	YAR 220-2F	19,0	–	–

Y-bearing plummer block units with a cast housing and grub screws, inch shafts
d 1/2 – 1 3/16 in

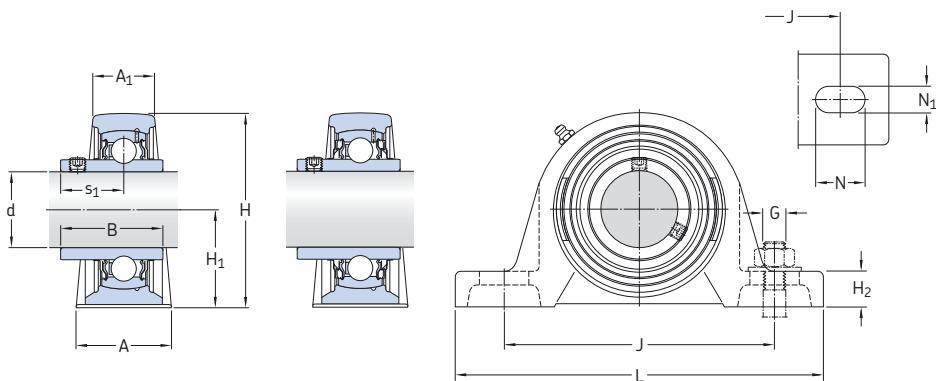


TF

TR

Dimensions													Designation
d	A	A ₁	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Bearing unit
in/mm													–
1/2 12,7	1.26 32	0.71 18	1.08 27,4	2.21 56	1.19 30,2	0.55 14	3.82 97	5.00 127	0.81 20,5	0.45 11,5	3/8 10	0.63 15,9	SY 1/2 TF
	1.26 32	0.71 18	1.08 27,4	2.09 53	1.06 27	0.43 10,8	3.82 97	5.00 127	0.81 20,5	0.45 11,5	3/8 10	0.63 15,9	SYH 1/2 TF
3/4 19,05	1.26 32	0.83 21	1.22 31	2.56 65	1.31 33,3	0.55 14	3.82 97	5.00 127	0.81 20,5	0.45 11,5	3/8 10	0.72 18,3	SY 3/4 TF
	1.34 34	0.91 23	1.22 31	2.56 65	1.31 33,3	0.55 14	3.82 97	5.00 127	0.81 20,7	0.51 13	3/8 10	0.72 18,3	SYJ 3/4 TF
5/8 15,875	1.26 32	0.71 18	1.08 27,4	2.21 56	1.19 30,2	0.55 14	3.82 97	5.00 127	0.81 20,5	0.45 11,5	3/8 10	0.63 15,9	SY 5/8 TF
13/16 20,637	1.42 36	0.87 22	1.34 34,1	2.76 70	1.44 36,5	0.63 16	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	0.78 19,8	SY 13/16 TF
7/8 22,225	1.42 36	0.87 22	1.34 34,1	2.76 70	1.44 36,5	0.63 16	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	0.78 19,8	SY 7/8 TF
15/16 23,813	1.42 36	0.87 22	1.34 34,1	2.76 70	1.44 36,5	0.63 16	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	0.78 19,8	SY 15/16 TF
1 25,4	1.42 36	0.87 22	1.34 34,1	2.78 70,5	1.44 36,5	0.63 16	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	0.78 19,8	SY 1. TF
	1.42 36	0.87 22	1.34 34,1	2.76 70	1.44 36,5	0.63 16	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	0.78 19,8	SY 1. TF/AH
	1.50 38	0.94 24	1.34 34,1	2.78 70,5	1.44 36,5	0.63 16	4.02 102	5.51 140	0.85 21,5	0.51 13	1/2 12	0.78 19,8	SYJ 1. TF
	1.42 36	0.87 22	1.34 34,1	2.78 70,5	1.44 36,5	0.63 16	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	0.78 19,8	SY 1. TR
1 1/16 26,988	1.57 40	0.98 25	1.50 38,1	3.23 82	1.69 42,9	0.65 16,5	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	0.87 22,2	SY 1.1/16 TF
1 1/8 28,575	1.57 40	0.98 25	1.50 38,1	3.23 82	1.94 49,2	0.65 16,5	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	0.87 22,2	SY 1.1/8 TF
1 3/16 30,163	1.57 40	0.98 25	1.50 38,1	3.23 82	1.69 42,9	0.65 16,5	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	0.87 22,2	SY 1.3/16 TF
	1.57 40	0.98 25	1.50 38,1	3.23 82	1.69 42,9	0.65 16,5	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	0.87 22,2	SY 1.3/16 TF/AH

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings dynamic C		static C ₀	Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Mass Bearing unit
–			lbf/kN			lbf/kN	r/min	lb/kg
SY 1/2 TF	SY 503 U	YAR 203-008-2F	2 150 9,56	1 070 4,75	50 0,2	9 500	1,21 0,55	
SYH 1/2 TF	SYH 503 U	YAR 203-008-2F	2 150 9,56	1 070 4,75	50 0,2	9 500	1,21 0,55	
SY 3/4 TF	SY 504 M	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	8 500	1,23 0,56	
SYJ 3/4 TF	SYJ 504	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	8 500	1,19 0,54	
SY 5/8 TF	SY 503 U	YAR 203-010-2F	2 150 9,56	1 070 4,75	50 0,2	9 500	1,12 0,51	
SY 13/16 TF	SY 505 U	YAR 205-013-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,85 0,84	
SY 7/8 TF	SY 505 U	YAR 205-014-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,78 0,81	
SY 15/16 TF	SY 505 U	YAR 205-015-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,71 0,78	
SY 1. TF	SY 505 M	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,57 0,71	
SY 1. TF/AH	SY 505 U/AH	YAR 205-100-2F/AH	3 150 14	1 760 7,8	80 0,335	7 000	1,59 0,72	
SYJ 1. TF	SYJ 505	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,61 0,73	
SY 1. TR	SY 505 M	YAR 205-100-2RF	3 150 14	1 760 7,8	80 0,335	4 300	1,59 0,72	
SY 1.1/16 TF	SY 506 U	YAR 206-101-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2,65 1,20	
SY 1.1/8 TF	SY 506 U	YAR 206-102-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2,60 1,20	
SY 1.3/16 TF	SY 506 U	YAR 206-103-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2,60 1,20	
SY 1.3/16 TF/AH	SY 506 U/AH	YAR 206-103-2F/AH	4 390 19,5	2 520 11,2	110 0,475	6 300	2,60 1,20	

**Y-bearing plummer block units with a cast housing and grub screws, inch shafts
d 1 1/4 - 1 5/8 in**

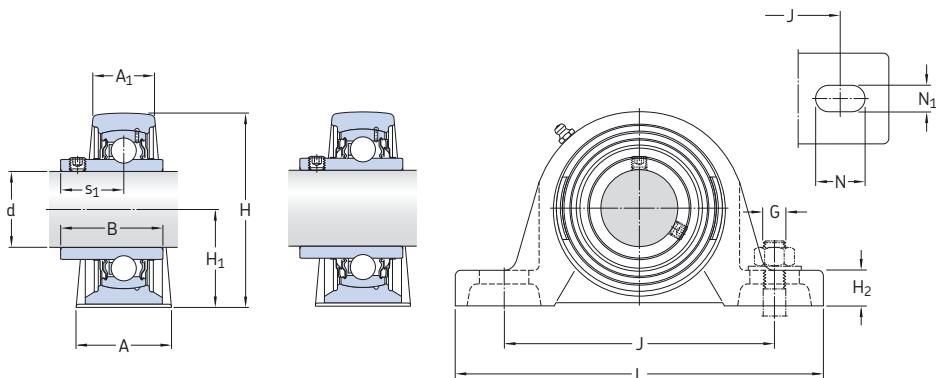


TF

TR

Dimensions													Designation
d	A	A ₁	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Bearing unit
in/mm													-
1 1/4 31,75	1.77 45	1.06 27	1.69 42,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.00 25,4	SY 1.1/4 TF
	1.81 46	1.10 28	1.69 42,9	3.66 93	1.87 47,6	0.67 17	5.08 129	6.57 167	0.94 24	0.67 17	5/8 14	1.00 25,4	SYJ 1.1/4 TF
	1.77 45	1.06 27	1.69 42,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.00 25,4	SY 1.1/4 TR
1 9/16 33,337	1.77 45	1.06 27	1.69 42,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.00 25,4	SY 1.5/16 TF
1 3/8 34,925	1.77 45	1.06 27	1.69 42,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.00 25,4	SY 1.3/8 TF
1 7/16 36,513	1.77 45	1.06 27	1.69 42,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.00 25,4	SY 1.7/16 TF
	1.87 47,6	1.12 28,6	1.94 49,2	4.25 108	2.12 54	0.81 20,6	5.66 143,7	7.37 187,5	0.96 24,5	0.55 14	1/2 12	1.19 30,2	SYM 1.7/16 TF
1 1/2 38,1	1.89 48	1.18 30	1.94 49,2	3.90 99	1.94 49,2	0.75 19	5.33 135,5	6.89 175	0.96 24,5	0.55 14	1/2 12	1.19 30,2	SY 1.1/2 TF
	1.89 48	1.18 30	1.94 49,2	3.90 99	1.94 49,2	0.75 19	5.33 135,5	6.89 175	0.96 24,5	0.55 14	1/2 12	1.19 30,2	SY 1.1/2 TF/AH
	1.93 49	1.22 31	1.94 49,2	3.90 99	1.94 49,2	0.71 18	5.37 136,5	7.24 184	1.00 25,5	0.67 17	9/16 14	1.19 30,2	SYJ 1.1/2 TF
	1.87 47,6	1.26 32	1.94 49,2	4.25 108	2.12 54	0.81 20,6	5.66 143,7	7.37 187,5	0.89 22,7	0.55 14	1/2 12	1.19 30,2	SYM 1.1/2 TF
	1.89 48	1.18 30	1.94 49,2	3.90 99	1.94 49,2	0.75 19	5.33 135,5	6.89 175	0.96 24,5	0.55 14	1/2 12	1.19 30,2	SY 1.1/2 TR
1 9/16 39,688	1.89 48	1.18 30	1.94 49,2	3.90 99	1.94 49,2	0.75 19	5.33 135,5	6.89 175	0.96 24,5	0.55 14	1/2 12	1.19 30,2	SY 1.9/16 TF
1 5/8 41,275	1.90 48,3	1.26 32	1.94 49,2	4.22 107	2.12 54	0.81 20,6	5.66 143,7	7.36 187	0.89 22,7	0.55 14	1/2 12	1.19 30,2	SY 1.5/8 TF

Designations Bearing unit	Separate components Housing	Bearing	Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass Bearing unit
			dynamic C	static C ₀	P _u	r/min	lb/kg
SY 1.1/4 TF	SY 507 M	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,35 1,50
SYJ 1.1/4 TF	SYJ 507	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,45 1,55
SY 1.1/4 TR	SY 507 M	YAR 207-104-2RF	5 740 25,5	3 440 15,3	150 0,655	3 200	3,35 1,50
SY 1.5/16 TF	SY 507 U	YAR 207-105-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,65 1,65
SY 1.3/8 TF	SY 507 U	YAR 207-106-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,35 1,50
SY 1.7/16 TF	SY 507 U	YAR 207-107-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,50 1,60
SYM 1.7/16 TF	SYM 508 U	YAR 208-107-2F	6 910 30,7	4 280 19	180 0,8	4 800	5,35 2,40
SY 1.1/2 TF	SY 508 M	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	4 800	4,10 1,85
SY 1.1/2 TF/AH	SY 508 U/AH	YAR 208-108-2F/AH	6 910 30,7	4 280 19	180 0,8	4 800	3,95 1,80
SYJ 1.1/2 TF	SYJ 508	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	4 800	4,20 1,90
SYM 1.1/2 TF	SYM 509 U	YAR 209-108-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	2,50 2,55
SY 1.1/2 TR	SY 508 M	YAR 208-108-2RF	6 910 30,7	4 280 19	180 0,8	2 800	4,10 1,85
SY 1.9/16 TF	SY 508 U	YAR 208-109-2F	6 910 30,7	4 280 19	180 0,8	4 300	4,25 1,95
SY 1.5/8 TF	SY 509 U	YAR 209-110-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	5,45 2,45

Y-bearing plummer block units with a cast housing and grub screws, inch shafts
d 1 11/16 – 2 1/4 in

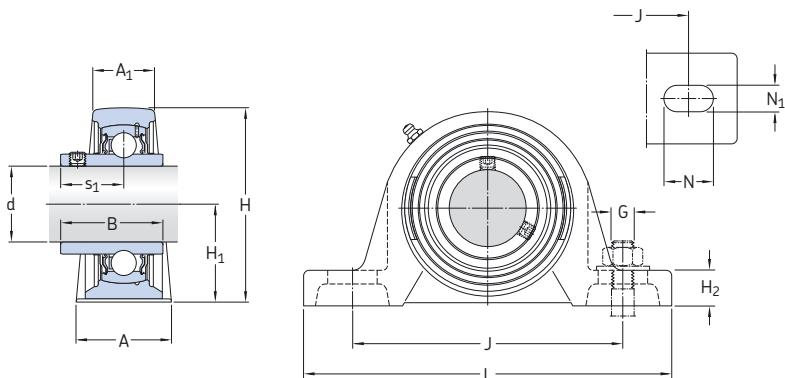


TF

Dimensions												Designation	
d	A	A ₁	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Bearing unit
in/mm												–	
1 11/16 42,862	1.90 48,3	1.26 32	1.94 49,2	4.22 107	2.12 54	0.81 20,6	5.66 143,7	7.36 187	0.89 22,7	0.55 14	1/2 12	1.19 30,2	SY 1.11/16 TF
	1.90 48,3	1.26 32	1.94 49,2	4.22 107	2.12 54	0.81 20,6	5.66 143,7	7.36 187	0.89 22,7	0.55 14	1/2 12	1.19 30,2	SY 1.11/16 TF/AH
	2.12 54	1.38 35	2.03 51,6	4.50 114,5	2.25 57,2	0.87 22,2	6.19 157,2	7.99 203	1.02 26	0.71 18	5/8 16	1.28 32,6	SYM 1.11/16 TF
1 3/4 44,445	1.89 48	1.26 32	1.94 49,2	4.23 107,5	2.13 54	0.83 21	5.65 143,5	7.36 187	0.89 22,5	0.55 14	1/2 12	1.19 30,2	SY 1.3/4 TF
	2.05 52	1.42 36	1.94 49,2	4.23 107,5	2.13 54	0.79 20	5.65 143,5	7.48 190	0.93 23,5	0.67 17	9/16 14	1.19 30,2	SYJ 1.3/4 TF
	2.13 54	1.34 34	2.03 51,6	4.49 114	2.25 57,2	0.87 22	6.18 157	7.99 203	1.02 26	0.71 18	5/8 16	1.28 32,6	SYM 1.3/4 TF
1 15/16 49,212	2.13 54	1.34 34	2.03 51,6	4.49 114	2.25 57,2	0.87 22	6.18 157	7.99 203	1.02 26	0.71 18	5/8 16	1.28 32,6	SY 1.15/16 TF
	2.13 54	1.34 34	2.03 51,6	4.49 114	2.25 57,2	0.87 22	6.18 157	7.99 203	1.02 26	0.71 18	5/8 16	1.28 32,6	SY 1.15/16 TF/AH
	2.13 54	1.34 34	2.03 51,6	4.46 113,5	2.19 55,6	0.84 21,4	6.18 157	7.99 203	1.02 26	0.71 18	5/8 16	1.28 32,6	SYH 1.15/16 TF
	2.38 60,4	1.57 40	2.19 55,6	5.00 127	2.50 63,5	0.94 23,8	6.75 171,5	8.62 219	1.08 27,5	0.71 18	5/8 16	1.31 33,4	SYM 1.15/16 TF
2 50,8	2.36 60	1.57 40	2.19 55,6	4.96 126	2.50 63,5	0.94 24	6.75 171,5	8.62 219	1.08 27,5	0.71 18	5/8 16	1.31 33,4	SY 2. TF
	2.36 60	1.57 40	2.19 55,6	4.96 126	2.50 63,5	0.94 24	6.75 171,5	8.62 219	1.08 27,5	0.79 20	5/8 16	1.31 33,4	SYJ 2. TF
	2.38 60,4	1.57 40	2.19 55,6	4.96 127	2.50 63,5	0.94 24	6.75 171,5	8.62 219	1.08 27,5	0.71 18	5/8 16	1.31 33,4	SY 2. TF/AH
2 3/16 55,563	2.38 60,4	1.57 40	2.19 55,6	5.00 127	2.50 63,5	0.94 23,8	6.75 171,5	8.62 219	1.08 27,5	0.71 18	5/8 16	1.31 33,4	SY 2.3/16 TF
	2.38 60,4	1.57 40	2.19 55,6	5.00 127	2.50 63,5	0.94 23,8	6.75 171,5	8.62 219	1.08 27,5	0.71 18	5/8 16	1.31 33,4	SY 2.3/16 TF/AH
	2.36 60	1.65 42	2.56 65,1	5.50 139,5	2.75 69,9	1.02 26	7.50 190,5	9.45 240	1.16 29,5	0.71 18	5/8 16	1.56 39,7	SYM 2.3/16 TF
2 1/4 57,15	2.36 60	1.65 42	2.56 65,1	5.50 138	2.75 68,3	1.02 25,4	7.50 190,5	9.45 240	1.16 29,5	0.71 18	5/8 16	1.56 39,7	SY 2.1/4 TF
	2.36 60	1.65 42	2.56 65,1	5.44 138	2.69 68,3	1.00 25,4	7.50 190,5	9.45 240	1.16 29,5	0.71 18	5/8 16	1.56 39,7	SYH 2.1/4 TF

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings dynamic C static C ₀		Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Mass Bearing unit
-			lbf/kN		lbf/kN	r/min	lb/kg
SY 1.11/16 TF	SY 509 U	YAR 209-111-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	5,30 2,40
SY 1.11/16 TF/AH	SY 509 U/AH	YAR 209-111-2F/AH	7 470 33,2	4 860 21,6	210 0,915	4 300	5,30 2,40
SYM 1.11/16 TF	SYM 510 U	YAR 210-111-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	6,60 3,00
SY 1.3/4 TF	SY 509 M	YAR 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	4,85 2,20
SYJ 1.3/4 TF	SYJ 509	YAR 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	5,30 2,40
SYM 1.3/4 TF	SY 510 U	YAR 210-112-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	6,75 3,05
SY 1.15/16 TF	SY 510 U	YAR 210-115-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	6,30 2,85
SY 1.15/16 TF/AH	SY 510 U/AH	YAR 210-115-2F/AH	7 900 35,1	5 220 23,2	220 0,98	4 000	6,30 2,85
SYH 1.15/16 TF	SYH 510 U	YAR 210-115-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	6,45 2,90
SYM 1.15/16 TF	SY 511 U	YAR 211-115-2F	9 810 43,6	6 530 29	280 1,25	3 600	8,80 4,00
SY 2. TF	SY 511 M	YAR 211-200-2F	9 810 43,6	6 530 29	280 1,25	3 600	8,25 3,75
SYJ 2. TF	SYJ 511	YAR 211-200-2F	9 810 43,6	6 530 29	280 1,25	3 600	8,50 3,85
SY 2. TF/AH	SY 511 U/AH	YAR 211-200-2F/AH	9 810 43,6	6 530 29	280 1,25	3 600	8,80 4,00
SY 2.3/16 TF	SY 511 U	YAR 211-203-2F	9 810 43,6	6 530 29	280 1,25	3 600	7,95 3,60
SY 2.3/16 TF/AH	SY 511 U/AH	YAR 211-203-2F/AH	9 810 43,6	6 530 29	280 1,25	3 600	8,40 3,80
SYM 2.3/16 TF	SY 512 U	YAR 212-203-2F	11 860 52,7	8 100 36	340 1,53	3 400	12,0 5,45
SY 2.1/4 TF	SY 512 U	YAR 212-204-2F	11 860 52,7	8 100 36	340 1,53	3 400	12,0 5,45
SYH 2.1/4 TF	SYH 512 U	YAR 212-204-2F	11 860 52,7	8 100 36	340 1,53	3 400	10,4 4,70

Y-bearing plummer block units with a cast housing and grub screws, inch shafts
d 2 7/16 – 3 in

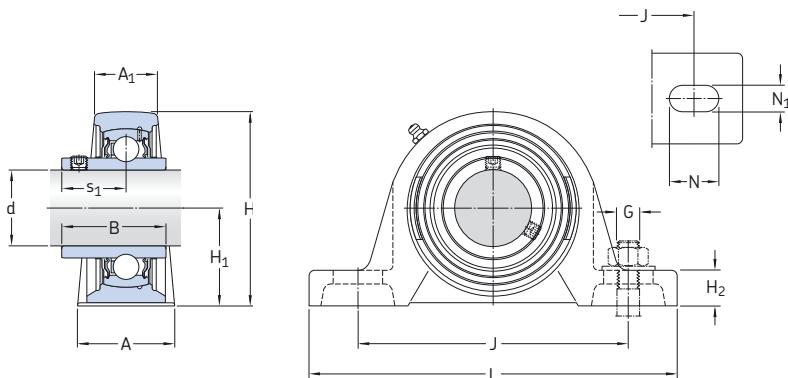


TF


Dimensions													Designation
d	A	A ₁	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Bearing unit
in/mm													–
2 7/16 61,913	2.36 60	1.65 42	2.56 65,1	5.50 139,5	2.75 69,9	1.02 26	7.50 190,5	9.45 240	1.16 29,5	0.71 18	5/8 16	1.56 39,7	SY 2.7/16 TF
	2.36 60	1.65 42	2.56 65,1	5.44 138	2.69 68,3	1.00 25,4	7.50 190,5	9.45 240	1.16 29,5	0.71 18	5/8 16	1.56 39,7	SYH 2.7/16 TF
	2.56 65	1.73 44	2.75 69,9	6.04 153,5	3.00 76,2	1.50 38,1	8.00 203,2	10.24 260	1.16 29,5	0.87 22	3/4 20	1.56 39,7	SYM 2.7/16 TF
2 1/2 63,5	2.56 65	1.73 44	2.69 68,3	5.94 151	3.00 76,2	1.14 29	7.99 203	10.12 257	1.38 35	0.87 22	3/4 20	1.69 42,9	SY 2.1/2 TF
	2.76 70	1.93 49	2.69 68,3	5.94 151	3.00 76,2	1.06 27	7.99 203	10.43 265	1.38 35	0.98 25	3/4 20	1.69 42,9	SYJ 2.1/2 TF
	2.56 65	1.73 44	2.75 69,9	6.04 153,5	3.00 76,2	1.54 39,1	8.00 203,2	10.24 260	1.16 29,5	0.87 22	3/4 20	1.56 39,7	SYM 2.1/2 TF
2 11/16 68,263	2.56 65	1.73 44	2.69 68,3	5.87 149	3.00 76,2	1.14 29	7.99 203	10.12 257	1.38 35	0.87 22	3/4 20	1.69 42,9	SY 2.11/16 TF
	3.00 76,2	1.89 48	2.88 73,1	6.97 177	3.50 88,9	1.86 47,2	9.00 228,6	12	1.38 35	0.88 22,2	3/4 20	1.81 46,1	SYM 2.11/16 TF
2 3/4 69,85	2.82 71,6	1.89 48	2.88 73,1	6.54 166	3.25 82,6	1.29 32,8	8.50 215,9	10.98 279	1.38 35	0.88 22,2	3/4 20	1.81 46,1	SY 2.3/4 TF
2 15/16 74,613	2.82 71,6	1.89 48	3.07 77,9	6.54 166	3.25 82,6	1.29 32,8	8.50 215,9	10.98 279	1.38 35	0.88 22,2	3/4 20	1.81 46,1	SY 2.15/16 TF
	3.07 78	2.05 52	3.07 77,9	6.97 177	3.50 88,9	1.87 47,6	9.00 228,6	12	1.38 35	0.88 22,2	3/4 20	1.88 47,7	SYM 2.15/16 TF
3 76,2	3.07 78	2.05 52	3.07 77,9	6.97 177	3.50 88,9	1.87 47,6	9.00 228,6	12	1.38 35	0.88 22,2	3/4 20	1.88 47,7	SYM 3. TF

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass Bearing unit
			dynamic C	static C ₀	P _u	r/min	lb/kg
SY 2.7/16 TF	SY 512 U	YAR 212-207-2F	11 860 52,7	8 100 36	340 1,53	3 400	10,0 4,55
SYH 2.7/16 TF	SYH 512 U	YAR 212-207-2F	11 860 52,7	8 100 36	340 1,53	3 400	10,3 4,65
SYM 2.7/16 TF	SY 514 U	YAR 214-207-2F	14 040 62,4	9 900 44	420 1,86	2 800	16,0 7,25
SY 2.1/2 TF	SY 513 M	YAR 213-208-2F	12 870 57,2	9 000 40	380 1,7	3 000	12,8 5,80
SYJ 2.1/2 TF	SYJ 513	YAR 213-208-2F	12 870 57,2	9 000 40	380 1,7	3 000	13,8 6,25
SYM 2.1/2 TF	SY 514 U	YAR 214-208-2F	14 040 62,4	9 900 44	420 1,86	2 800	15,4 7,00
SY 2.11/16 TF	SY 513 U	YAR 213-211-2F	12 870 57,2	9 000 40	380 1,7	3 000	12,5 5,70
SYM 2.11/16 TF	SYM 515 U	YAR 215-211-2F	14 920 66,3	11 030 49	460 2,04	2 600	23,8 10,8
SY 2.3/4 TF	SY 515 U	YAR 215-212-2F	14 920 66,3	11 030 49	460 2,04	2 600	17,7 8,00
SY 2.15/16 TF	SY 515 U	YAR 215-215-2F	16 380 72,8	11 930 53	460 2,04	2 400	16,6 7,55
SYM 2.15/16 TF	SY 516 U	YAR 216-215-2F	16 380 72,8	11 930 53	490 2,16	2 400	22,8 10,3
SYM 3. TF	SY 516 U	YAR 216-300-2F	16 380 72,8	11 930 53	490 2,16	2 400	22,4 10,2

**Y-bearing plummer block units with a cast housing and an eccentric locking collar,
metric shafts
d 15 – 60 mm**

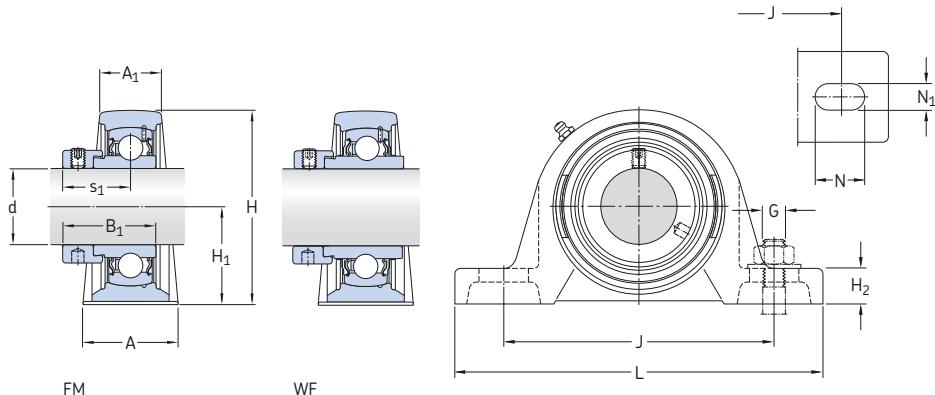


Dimensions													Basic load ratings dynamic static C C ₀	Fatigue load limit P _u	Limiting speed with shaft tolerance h6 r/min	Designation Bearing unit	
d	A	A ₁	B ₁	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁				–	
mm													kN	kN	r/min	–	
15	32	18	28,6	57	30,2	14	97	127	20,5	11,5	10	22,1	9,56	4,75	0,2	9 500	SY 15 FM
17	32	18	28,6	57	30,2	14	97	127	20,5	11,5	10	22,1	9,56	4,75	0,2	9 500	SY 17 FM
20	32	21	31	65	33,3	14	97	127	20,5	11,5	10	23,5	12,7	6,55	0,28	8 500	SY 20 FM
	32	21	43,7	65	33,3	14	97	127	20,5	11,5	10	26,6	12,7	6,55	0,28	8 500	SY 20 WF
25	36	22	31	70,5	36,5	16	102	130	19,5	11,5	10	23,5	14	7,8	0,335	7 000	SY 25 FM
	36	22	44,4	70,5	36,5	16	102	130	19,5	11,5	10	26,9	14	7,8	0,335	7 000	SY 25 WF
30	40	25	35,7	82,5	42,9	17	117,5	152	23,5	14	12	26,7	19,5	11,2	0,475	6 300	SY 30 FM
	40	25	48,4	82,5	42,9	17	117,5	152	23,5	14	12	30,1	19,5	11,2	0,475	6 300	SY 30 WF
35	45	27	38,9	93	47,6	19	126	160	21	14	12	29,4	25,5	15,3	0,655	5 300	SY 35 FM
	45	27	51,1	93	47,6	19	126	160	21	14	12	32,3	25,5	15,3	0,655	5 300	SY 35 WF
40	48	30	43,7	99	49,2	19	135,5	175	24,5	14	12	32,7	30,7	19	0,8	4 800	SY 40 FM
	48	30	56,3	99	49,2	19	135,5	175	24,5	14	12	34,9	30,7	19	0,8	4 800	SY 40 WF
45	48	32	43,7	107,5	54	21	143,5	187	22,5	14	12	32,7	33,2	21,6	0,915	4 300	SY 45 FM
	48	32	56,3	107,5	54	21	143,5	187	22,5	14	12	34,9	33,2	21,6	0,915	4 300	SY 45 WF
50	54	34	43,7	114,5	57,2	22	157	203	26	18	16	32,7	35,1	23,2	0,98	4 000	SY 50 FM
	54	34	62,7	114,5	57,2	22	157	203	26	18	16	38,1	35,1	23,2	0,98	4 000	SY 50 WF
55	60	40	48,4	126	63,5	24	171,5	219	27,5	18	16	36,4	43,6	29	1,25	3 600	SY 55 FM
	60	40	71,4	126	63,5	24	171,5	219	27,5	18	16	43,6	43,6	29	1,25	3 600	SY 55 WF
60	60	42	53,1	138	69,9	26,5	190,5	240	29,5	18	16	39,6	52,7	36	1,53	3 400	SY 60 FM
	60	42	77,8	138	69,9	26,5	190,5	240	29,5	18	16	46,8	52,7	36	1,53	3 400	SY 60 WF



Designations			Mass	Appropriate end cover	
Bearing unit	Separate components	Housing	Bearing unit	Designation	Dimension
SY 15 FM	SY 503 M	YET 203/15	0,53	–	–
SY 17 FM	SY 503 M	YET 203	0,52	–	–
SY 20 FM	SY 504 M	YET 204	0,59	ECY 204	18,5
SY 20 WF	SY 504 M	YEL 204-2F	0,62	ECY 204	18,5
SY 25 FM	SY 505 M	YET 205	0,73	ECY 205	18
SY 25 WF	SY 505 M	YEL 205-2F	0,78	ECY 205	18
SY 30 FM	SY 506 M	YET 206	1,10	ECY 206	20
SY 30 WF	SY 506 M	YEL 206-2F	1,20	ECY 206	20
SY 35 FM	SY 507 M	YET 207	1,55	ECY 207	22
SY 35 WF	SY 507 M	YEL 207-2F	1,60	ECY 207	22
SY 40 FM	SY 508 M	YET 208	1,85	ECY 208	23,5
SY 40 WF	SY 508 M	YEL 208-2F	1,95	ECY 208	23,5
SY 45 FM	SY 509 M	YET 209	2,25	ECY 209	23
SY 45 WF	SY 509 M	YEL 209-2F	2,35	ECY 209	23
SY 50 FM	SY 510 M	YET 210	2,75	ECY 210	29,5
SY 50 WF	SY 510 M	YEL 210-2F	2,90	ECY 210	29,5
SY 55 FM	SY 511 M	YET 211	3,65	ECY 211	34
SY 55 WF	SY 511 M	YEL 211-2F	3,90	ECY 211	34
SY 60 FM	SY 512 M	YET 212	4,45	ECY 212	35,5
SY 60 WF	SY 512 M	YEL 212-2F	4,75	ECY 212	35,5

**Y-bearing plummer block units with a cast housing and an eccentric locking collar,
inch shafts
d 1/2 – 1 5/16 in**

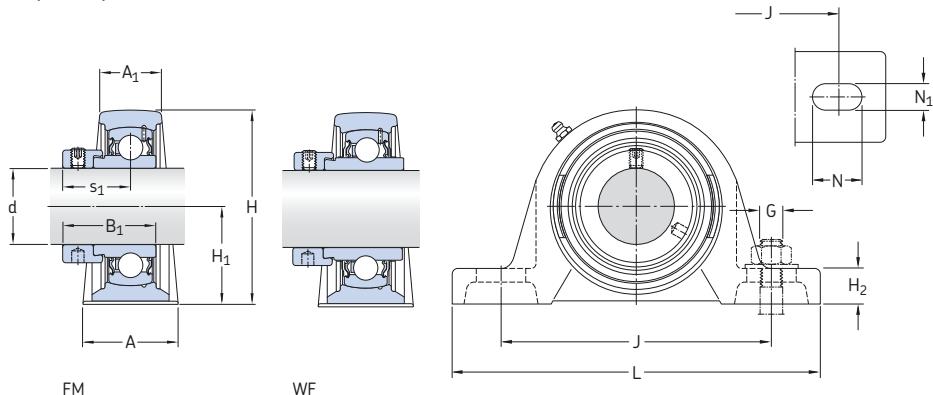


Dimensions

d	A	A ₁	B ₁	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Designation Bearing unit
in/mm													
1/2 12,7	1.26 32	0.71 18	1.13 28,6	2.21 56	1.19 30,2	0.55 14	3.82 97	5.00 127	0.81 20,5	0.45 11,5	3/8 10	0.87 22,1	SY 1/2 FM
3/4 19,05	1.26 32	0.83 21	1.22 31	2.52 64	1.31 33,3	0.55 14	3.82 97	5.00 127	0.81 20,5	0.45 11,5	3/8 10	0.94 24	SY 3/4 FM
	1.26 32	0.83 21	1.72 43,7	2.46 62,5	1.25 31,8	0.49 12,5	3.82 97	5.00 127	0.81 20,5	0.45 11,5	3/8 10	1.05 26,6	SYH 3/4 WF
15/16 23,813	1.42 36	0.87 22	1.22 31	2.76 70	1.44 36,5	0.63 16	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	0.93 23,5	SY 15/16 FM
1 25,4	1.42 36	0.87 22	1.22 31	2.63 67	1.31 33,4	0.51 12,9	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	0.93 23,5	SYH 1. FM
	1.42 36	0.87 22	1.75 44,4	2.63 67	1.31 33,4	0.51 12,9	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	1.06 26,9	SYH 1. WF
1 1/8 28,575	1.57 40	0.98 25	1.41 35,7	3.23 82	1.69 42,9	0.65 16,5	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	1.05 26,7	SY 1.1/8 FM
	1.57 40	0.98 25	1.91 48,4	3.14 80	1.56 39,7	0.58 14,8	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	1.19 30,1	SYH 1.1/8 WF
1 3/16 30,163	1.57 40	0.98 25	1.41 35,7	3.23 82	1.69 42,9	0.65 16,5	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	1.05 26,7	SY 1.3/16 FM
	1.57 40	0.98 25	1.41 35,7	3.14 80	1.56 39,7	0.58 14,8	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	1.05 26,7	SYH 1.3/16 FM
	1.57 40	0.98 25	1.91 48,4	3.14 80	1.56 39,7	0.58 14,8	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	1.19 30,1	SYH 1.3/16 WF
1 1/4 31,75	1.77 45	1.06 27	1.53 38,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.16 29,4	SY 1.1/4 FM
	1.77 45	1.06 27	1.53 38,9	3.60 91,5	1.81 46,1	0.69 17,5	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.16 29,4	SYH 1.1/4 FM
	1.77 45	1.06 27	2.01 51,1	3.60 91,5	1.81 46,1	0.69 17,5	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.27 32,3	SYH 1.1/4 WF
1 5/16 33,338	1.77 45	1.06 27	1.53 38,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.16 29,4	SY 1.5/16 FM

Designations Bearing unit	Separate components		Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass Bearing unit
	Housing	Bearing	dynamic C	static C ₀	lbf/kN	r/min	lb/kg
SY 1/2 FM	SY 503 U	YET 203-008	2 150 9,56	1 070 4,75	50 0,2	9 500	1,32 0,60
SY 3/4 FM	SY 504 U	YET 204-012	2 860 12,7	1 470 6,55	60 0,28	8 500	1,37 0,62
SYH 3/4 WF	SYH 504 U	YEL 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	8 500	1,45 0,66
SY 15/16 FM	SY 505 U	YET 205-015	3 150 14	1 760 7,8	80 0,335	7 000	1,65 0,75
SYH 1. FM	SYH 505 U	YET 205-100	3 150 14	1 760 7,8	80 0,335	7 000	1,63 0,74
SYH 1. WF	SYH 505 U	YEL 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,73 0,79
SY 1.1/8 FM	SY 506 U	YET 206-102	4 390 19,5	2 520 11,2	110 0,475	6 300	2,45 1,10
SYH 1.1/8 WF	SYH 506 U	YEL 206-102-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	3,20 1,45
SY 1.3/16 FM	SY 506 U	YET 206-103	4 390 19,5	2 520 11,2	110 0,475	6 300	2,45 1,10
SYH 1.3/16 FM	SYH 506 U	YET 206-103	4 390 19,5	2 520 11,2	110 0,475	6 300	2,55 1,15
SYH 1.3/16 WF	SYH 506 U	YEL 206-103-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2,65 1,20
SY 1.1/4 FM	SY 507 U	YET 207-104	5 740 25,5	3 440 15,3	150 0,655	5 300	3,75 1,70
SYH 1.1/4 FM	SYH 507 U	YET 207-104	5 740 25,5	3 440 15,3	150 0,655	5 300	3,55 1,60
SYH 1.1/4 WF	SYH 507 U	YEL 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	4,10 1,85
SY 1.5/16 FM	SY 507 U	YET 207-105	5 740 25,5	3 440 15,3	150 0,655	5 300	3,65 1,65

**Y-bearing plummer block units with a cast housing and an eccentric locking collar,
inch shafts
d 1 3/8 – 2 in**

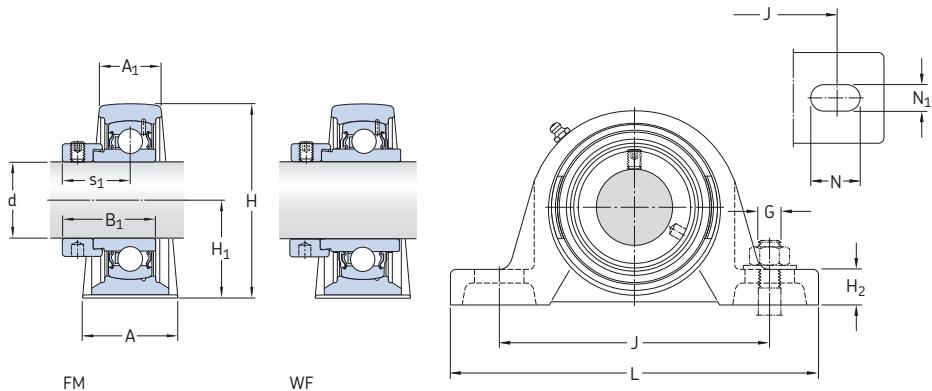


Dimensions

															Designation Bearing unit
d	A	A ₁	B ₁	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁		-	
in/mm															
1 3/8 34,925	1.77 45	1.06 27	1.53 38,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.16 29,4		SY 1.3/8 FM	
	1.77 45	1.06 27	2.01 51,1	3.60 91,5	1.81 46,1	0.69 17,5	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.27 32,3		SYH 1.3/8 WF	
1 7/16 36,513	1.77 45	1.06 27	1.53 38,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.16 29,4		SY 1.7/16 FM	
	1.77 45	1.06 27	2.01 51,1	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.27 32,3		SY 1.7/16 WF	
	1.77 45	1.06 27	1.53 38,9	3.60 91,5	1.81 46,1	0.69 17,5	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.16 29,4		SYH 1.7/16 FM	
	1.77 45	1.06 27	2.01 51,1	3.60 91,5	1.81 46,1	0.69 17,5	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.27 32,3		SYH 1.7/16 WF	
1 1/2 38,1	1.89 48	1.18 30	1.72 43,7	3.90 99	1.94 49,2	0.75 19	5.33 135,5	6.89 175	0.96 24,5	0.55 14	1/2 12	1.31 33,2		SY 1.1/2 FM	
	1.89 48	1.18 30	2.22 56,3	3.90 99	1.94 49,2	0.75 19	5.33 135,5	6.89 175	0.96 24,5	0.55 14	1/2 12	1.37 34,9		SYH 1.1/2 WF	
1 11/16 42,863	1.90 48,3	1.26 32	1.72 43,7	4.22 107	2.12 54	0.81 20,6	5.66 143,7	7.36 187	0.89 22,7	0.55 14	1/2 12	1.29 32,7		SY 1.11/16 FM	
	1.90 48,3	1.26 32	2.22 56,3	4.16 105,5	2.06 52,4	0.79 20	5.66 143,7	7.36 187	0.89 22,7	0.55 14	1/2 12	1.37 34,9		SYH 1.11/16 WF	
1 3/4 44,445	1.90 48,3	1.26 32	1.72 56,3	4.22 105,5	2.12 52,4	0.81 20	5.66 143,7	7.36 187	0.89 22,7	0.55 14	1/2 12	1.29 32,7		SY 1.3/4 FM	
	1.90 48,3	1.26 32	2.22 56,3	4.16 105,5	2.06 52,4	0.79 20	5.66 143,7	7.36 187	0.89 22,7	0.55 14	1/2 12	1.37 34,9		SYH 1.3/4 WF	
1 15/16 49,213	2.13 54	1.34 34	1.72 43,7	4.49 114	2.25 57,2	0.87 22	6.18 157	7.99 203	1.02 26	0.71 18	5/8 16	1.29 32,7		SY 1.15/16 FM	
	2.13 54	1.34 34	2.47 62,7	4.49 114	2.25 57,2	0.87 22	6.18 157	7.99 203	1.02 26	0.71 18	5/8 16	1.50 38,1		SY 1.15/16 WF	
	2.13 54	1.34 34	2.47 62,7	4.46 113,5	2.19 55,6	0.84 21,4	6.18 157	7.99 203	1.02 26	0.71 18	5/8 16	1.50 38,1		SYH 1.15/16 WF	
2 50,8	2.38 60,4	1.57 40	1.91 48,4	5.00 127	2.50 63,5	0.94 23,8	6.75 171,5	8.63 219	1.08 27,5	0.71 18	5/8 16	1.41 35,9		SY 2. FM	
	2.38 60,4	1.57 40	1.91 48,4	4.98 126,5	2.44 61,9	0.92 23,3	6.75 171,5	8.63 219	1.08 27,5	0.71 18	5/8 16	1.41 35,9		SYH 2. FM	
	2.38 60,4	1.57 40	2.81 71,4	4.98 126,5	2.44 61,9	0.92 23,3	6.75 171,5	8.63 219	1.08 27,5	0.71 18	5/8 16	1.72 43,6		SYH 2. WF	

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings dynamic C static C ₀		Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Mass Bearing unit
–			lbf/kN		lbf/kN	r/min	lb/kg
SY 1.3/8 FM	SY 507 U	YET 207-106	5 740 25,5	3 440 15,3	150 0,655	5 300	3,65 1,65
SYH 1.3/8 WF	SYH 507 U	YEL 207-106-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,95 1,80
SY 1.7/16 FM	SY 507 U	YET 207-107	5 740 25,5	3 440 15,3	150 0,655	5 300	3,60 1,63
SY 1.7/16 WF	SY 507 U	YEL 207-107-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,75 1,70
SYH 1.7/16 FM	SYH 507 U	YET 207-107	5 740 25,5	3 440 15,3	150 0,655	5 300	3,40 1,55
SYH 1.7/16 WF	SYH 507 U	YEL 207-107-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,65 1,65
SY 1.1/2 FM	SY 508 U	YET 208-108	6 910 30,7	4 280 19	180 0,8	4 800	3,95 1,80
SYH 1.1/2 WF	SYH 508 U	YEL 208-108-2F	6 910 30,7	4 280 19	180 0,8	4 800	4,50 2,05
SY 1.11/16 FM	SY 509 U	YET 209-111	7 470 33,2	4 860 21,6	210 0,915	4 300	5,05 2,30
SYH 1.11/16 WF	SYH 509 U	YEL 209-111-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	5,85 2,65
SY 1.3/4 FM	SY 509 U	YET 209-112	7 470 33,2	4 860 21,6	210 0,915	4 300	4,95 2,25
SYH 1.3/4 WF	SYH 509 U	YEL 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	5,30 2,40
SY 1.15/16 FM	SY 510 U	YET 210-115	7 900 35,1	5 220 23,2	220 0,98	4 000	6,05 2,75
SY 1.15/16 WF	SY 510 U	YEL 210-115-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	6,50 2,95
SYH 1.15/16 WF	SYH 510 U	YEL 210-115-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	6,50 2,95
SY 2. FM	SY 511 U	YET 211-200	9 810 43,6	6 530 29	280 1,25	3 600	8,40 3,80
SYH 2. FM	SYH 511 U	YET 211-200	9 810 43,6	6 530 29	280 1,25	3 600	8,80 4,00
SYH 2. WF	SYH 511 U	YEL 211-200-2F	9 810 43,6	6 530 29	280 1,25	3 600	9,25 4,20

**Y-bearing plummer block units with a cast housing and an eccentric locking collar,
inch shafts**

d 2 3/16 – 2 7/16 in

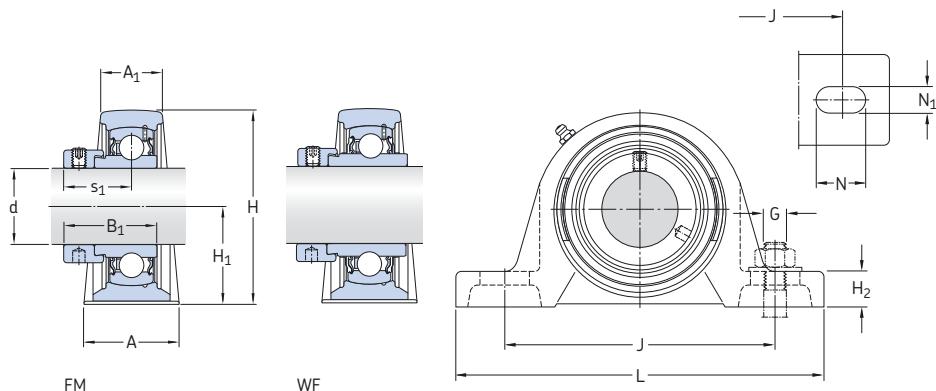


Dimensions

															Designation Bearing unit
d	A	A ₁	B ₁	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁		–	
in/mm															
2 3/16	2.38	1.57	1.91	5.00	2.50	0.94	6.75	8.63	1.08	0.71	5/8	1.41		SY 2.3/16 FM	
55,563	60,4	40	48,4	127	63,5	23,8	171,5	219	27,5	18	16	35,9		SYH 2.3/16 WF	
	2.38	1.57	2.81	4.98	2.44	0.92	6.75	8.63	1.08	0.71	5/8	1.72			
	60,4	40	71,4	126,5	61,9	23,3	171,5	219	27,5	18	16	43,6			
2 7/16	2.36	1.65	3.06	5.50	2.75	1.02	7.50	9.45	1.15	0.71	5/8	1.84		SYH 2.7/16 WF	
61,913	60	42	77,8	139,5	69,9	26	190,5	240	29,1	18	16	46,7			

Designations Bearing unit	Separate components		Basic load ratings		Fatigue load limit	Limiting speed	Mass
	Housing	Bearing	dynamic C	static C ₀	P _u	with shaft tolerance h6	Bearing unit
-			lbf/kN		lbf/kN	r/min	lb/kg
SY 2.3/16 FM	SY 511 U	YET 211-203	9 810 43,6	6 530 29	280 1,25	3 600	8,05 3,65
SYH 2.3/16 WF	SYH 511 U	YEL 211-203-2F	9 810 43,6	6 530 29	280 1,25	3 600	8,70 3,95
SYH 2.7/16 WF	SYH 512 U	YEL 212-207-2F	11 860 52,7	8 100 36	340 1,53	3 400	10,8 4,90

Y-bearing plummer block units with a cast housing and an adapter sleeve, metric shafts
d 20 – 60 mm

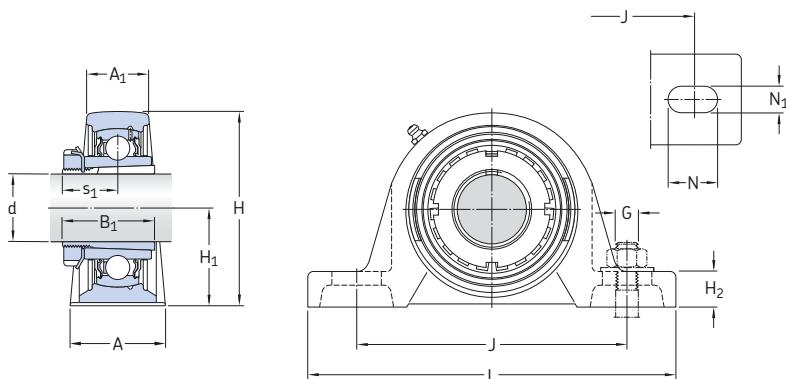


Dimensions	d	A	A ₁	B ₁	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Basic load ratings		Fatigue load limit P _u	Designations ¹⁾	
														C	C ₀		Bearing unit	Adapter sleeve
mm																kN	kN	–
20	38	24	35	70,5	36,5	16	102	140	21,5	13	12	20	14	7,8	0,335	SYJ 25 KF	H 2305	
25	42	27	38	82,5	42,9	16	118	165	24	17	14	22	19,5	11,2	0,475	SYJ 30 KF	H 2306	
30	46	28	43	93	47,6	17	129	167	24	17	14	24,3	25,5	15,3	0,655	SYJ 35 KF	H 2307	
35	49	31	46	99	49,2	18	136,5	184	25,5	17	14	27	30,7	19	0,8	SYJ 40 KF	H 2308	
40	52	36	50	107,5	54	20	143,5	190	23,5	17	14	28,5	33,2	21,6	0,915	SYJ 45 KF	H 2309	
45	58	38	55	114,5	57,2	22	157,5	206	26,5	20	16	30,5	35,1	23,2	0,98	SYJ 50 KF	H 2310	
50	60	40	59	126	63,5	24	171,5	219	27,5	20	16	32,5	43,6	29	1,25	SYJ 55 KF	H 2311	
55	65	47	62	138	69,8	26,5	188,5	241	29,5	20	16	34,3	52,7	36	1,53	SYJ 60 KF	H 2312	
60	70	49	65	151	76,2	27	203	265	35	25	20	35,8	57,2	40	1,7	SYJ 65 KF	H 2313	

¹⁾ Bearing unit and adapter sleeve to be ordered separately

Designations	Bearing unit without adapter sleeve	Separate components of the bearing unit	Limiting speed	Mass Bearing unit + sleeve
	Housing	Bearing	r/min	kg
SYJ 25 KF	SYJ 505	YSA 205-2FK	7 000	0,63
SYJ 30 KF	SYJ 506	YSA 206-2FK	6 300	0,90
SYJ 35 KF	SYJ 507	YSA 207-2FK	5 300	1,25
SYJ 40 KF	SYJ 508	YSA 208-2FK	4 800	1,80
SYJ 45 KF	SYJ 509	YSA 209-2FK	4 300	2,10
SYJ 50 KF	SYJ 510	YSA 210-2FK	4 000	2,75
SYJ 55 KF	SYJ 511	YSA 211-2FK	3 600	3,85
SYJ 60 KF	SYJ 512	YSA 212-2FK	3 400	5,00
SYJ 65 KF	SYJ 513	YSA 213-2FK	3 000	6,35

Y-bearing plummer block units with a cast housing and an adapter sleeve, inch shafts
d 3/4 – 2 1/8 in

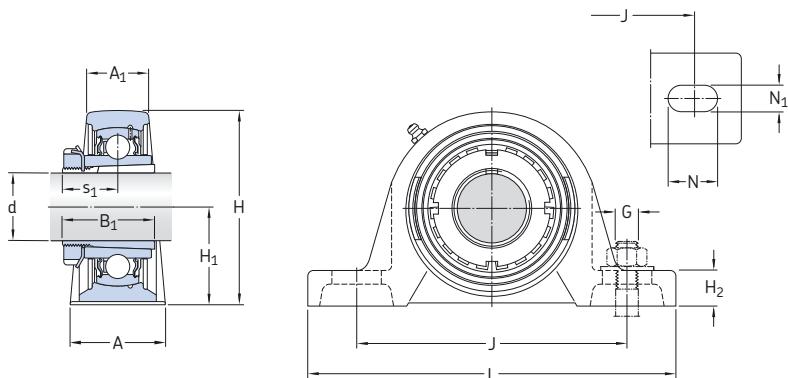


Dimensions

d	A	A ₁	B ₁	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Designations ¹⁾	Bearing unit	Adapter sleeve
in/mm															
3/4 19,05	1.50 38	0.94 24	1.38 35	2.78 70,5	1.44 36,5	0.63 16	4.02 102	5.51 140	0.85 21,5	0.51 13	1/2 12	0.79 20	SYJ 25 KF	HE 2305	
15/16 23,813	1.65 42	1.06 27	1.50 38	3.25 82,5	1.69 42,9	0.63 16	4.65 118	6.50 165	0.94 24	0.67 17	9/16 14	0.87 22	SYJ 30 KF	HA 2306	
1 25,4	1.65 42	1.06 27	1.50 38	3.25 82,5	1.69 42,9	0.63 16	4.65 118	6.50 165	0.94 24	0.67 17	9/16 14	0.87 22	SYJ 30 KF	HE 2306	
1 3/16 30,163	1.81 46	1.1 28	1.69 43	3.66 93	1.87 47,6	0.67 17	5.08 129	6.57 167	0.94 24	0.67 17	9/16 14	0.96 24,3	SYJ 35 KF	HA 2307	
1 1/4 31,75	1.93 49	1.22 31	1.81 46	3.90 99	1.94 49,2	0.71 18	5.37 136,5	7.24 184	1.00 25,5	0.67 17	9/16 14	1.06 27	SYJ 40 KF	HE 2308	
1 7/16 36,513	2.05 52	1.42 36	1.97 50	4.23 107,5	2.13 54	0.79 20	5.65 143,5	7.48 190	0.93 23,5	0.67 17	9/16 14	1.12 28,5	SYJ 45 KF	HA 2309	
1 1/2 38,1	2.05 52	1.42 36	1.97 50	4.23 107,5	2.13 54	0.79 20	5.65 143,5	7.48 190	0.93 23,5	0.67 17	9/16 14	1.12 28,5	SYJ 45 KF	HE 2309	
1 5/8 41,275	2.28 58	1.5 38	2.17 55	4.51 114,5	2.25 57,2	0.87 22	6.20 157,5	8.11 206	1.04 26,5	0.79 20	5/8 16	1.20 30,5	SYJ 50 KF	HS 2310	
1 11/16 42,863	2.28 58	1.5 38	2.17 55	4.51 114,5	2.25 57,2	0.87 22	6.20 157,5	8.11 206	1.04 26,5	0.79 20	5/8 16	1.20 30,5	SYJ 50 KF	HA 2310	
1 3/4 44,45	2.28 58	1.5 38	2.17 55	4.51 114,5	2.25 57,2	0.87 22	6.20 157,5	8.11 206	1.04 26,5	0.79 20	5/8 16	1.20 30,5	SYJ 50 KF	HE 2310	
1 15/16 49,213	2.36 60	1.57 40	2.32 59	4.96 126	2.50 63,5	0.94 24	6.75 171,5	8.62 219	1.08 27,5	0.79 20	5/8 16	1.28 32,5	SYJ 55 KF	HA 2311	
2 50,8	2.36 60	1.57 40	2.32 59	4.96 126	2.50 63,5	0.94 24	6.75 171,5	8.62 219	1.08 27,5	0.79 20	5/8 16	1.28 32,5	SYJ 55 KF	HE 2311 B	
2 1/8 53,975	2.56 65	1.85 47	2.44 62	5.43 138	2.75 69,8	1.04 26,5	7.42 188,5	9.49 241	1.16 29,5	0.79 20	5/8 16	1.35 34,3	SYJ 60 KF	HS 2312	

¹⁾ Bearing unit and adapter sleeve to be ordered separately

Designations Bearing unit without adapter sleeve	Separate components of the bearing unit		Basic load ratings		Fatigue load limit	Limiting speed	Mass Bearing unit + sleeve
	Housing	Bearing	dynamic C	static C_0	P_u	r/min	lb/kg
SYJ 25 KF	SYJ 505	YSA 205-2FK	3 150 14	1 760 7,8	80 0,335	7 000	1,40 0,63
SYJ 30 KF	SYJ 506	YSA 206-2FK	4 390 19,5	2 520 11,2	110 0,475	6 300	2,00 0,90
SYJ 30 KF	SYJ 506	YSA 206-2FK	4 390 19,5	2 520 11,2	110 0,475	6 300	2,00 0,90
SYJ 35 KF	SYJ 507	YSA 207-2FK	5 740 25,5	3 440 15,3	150 0,655	5 300	2,75 1,25
SYJ 40 KF	SYJ 508	YSA 208-2FK	6 910 30,7	4 280 19	180 0,8	4 800	3,95 1,80
SYJ 45 KF	SYJ 509	YSA 209-2FK	7 470 33,2	4 860 21,6	210 0,915	4 300	4,70 2,15
SYJ 45 KF	SYJ 509	YSA 209-2FK	7 470 33,2	4 860 21,6	210 0,915	4 300	4,65 2,10
SYJ 50 KF	SYJ 510	YSA 210-2FK	7 900 35,1	5 220 23,2	220 0,98	4 000	6,05 2,75
SYJ 50 KF	SYJ 510	YSA 210-2FK	7 900 35,1	5 220 23,2	220 0,98	4 000	6,05 2,75
SYJ 50 KF	SYJ 510	YSA 210-2FK	7 900 35,1	5 220 23,2	220 0,98	4 000	6,05 2,75
SYJ 55 KF	SYJ 511	YSA 211-2FK	9 810 43,6	6 530 29	280 1,25	3 600	8,50 3,85
SYJ 55 KF	SYJ 511	YSA 211-2FK	9 810 43,6	6 530 29	280 1,25	3 600	8,50 3,85
SYJ 60 KF	SYJ 512	YSA 212-2FK	11 860 52,7	8 100 36	340 1,53	3 400	11,0 5,00

Y-bearing plummer block units with a cast housing and an adapter sleeve, inch shafts
d 2 3/16 – 2 3/8 in

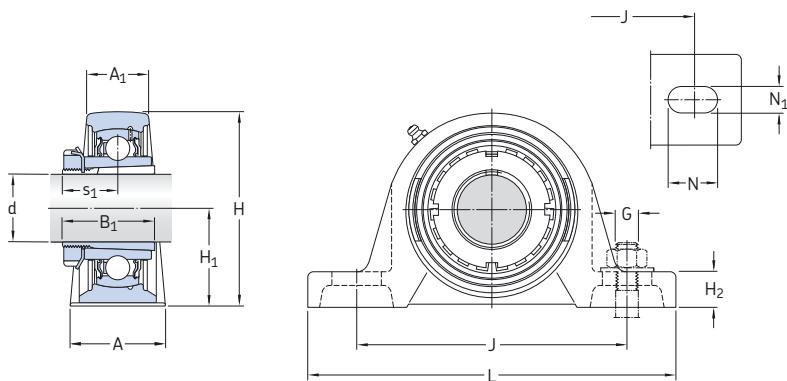


Dimensions

															Designations¹⁾	
															Bearing unit	Adapter sleeve
d	A	A ₁	B ₁	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁				
in/mm														–		
2 3/16 55,563	2.76 70	1.93 49	2.56 65	5.94 151	3.00 76,2	1.06 27	7.99 203	10.43 265	1.38 35	0.98 25	3/4 20	1.41 35,8		SYJ 65 KF	HA 2313	
2 1/4 57,15	2.76 70	1.93 49	2.56 65	5.94 151	3.00 76,2	1.06 27	7.99 203	10.43 265	1.38 35	0.98 25	3/4 20	1.41 35,8		SYJ 65 KF	HE 2313	
2 3/8 60,325	2.76 70	1.93 49	2.56 65	5.94 151	3.00 76,2	1.06 27	7.99 203	10.43 265	1.38 35	0.98 25	3/4 20	1.41 35,8		SYJ 65 KF	HS 2313	

¹⁾ Bearing unit and adapter sleeve to be ordered separately


Designations	Bearing unit without adapter sleeve	Separate components of the bearing unit	Basic load ratings		Fatigue load limit	Limiting speed	Mass Bearing unit + sleeve
	Housing	Bearing	dynamic C	static C ₀	P _u	r/min	lb/kg
–			lbf/kN	lbf/kN	r/min		
SYJ 65 KF	SYJ 513	YSA 213-2FK	12 870 57,2	9 000 40	380 1,7	3 000	14,5 6,55
SYJ 65 KF	SYJ 513	YSA 213-2FK	12 870 57,2	9 000 40	380 1,7	3 000	14,5 6,55
SYJ 65 KF	SYJ 513	YSA 213-2FK	12 870 57,2	9 000 40	380 1,7	3 000	14,0 6,35

**Y-bearing plummer block units with a shortened cast housing and grub screws,
metric shafts**
d 20 – 50 mm

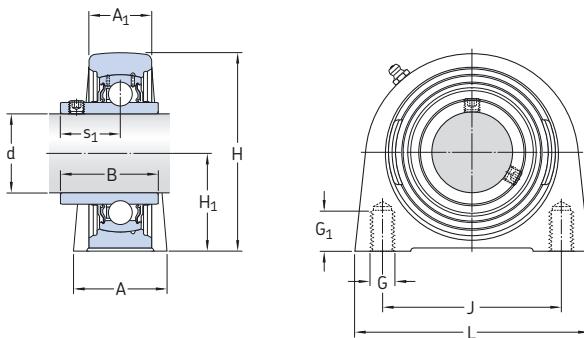

SYF

Dimensions												Basic load ratings dynamic C	static C ₀	Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Designation Bearing unit
d	A	A ₁	B	H	H ₁	H ₂	J	L	G	G ₁	s ₁					
mm												kN	kN	r/min	–	
20	32	21	31	65	33,3	—	50,8	65	M 8	14	18,3	12,7	6,55	0,28	8 500	SYF 20 TF
	38	24	31	63	30,2	8	52	76	M 10	12	18,3	12,7	6,55	0,28	8 500	SYFJ 20 TF
25	36	22	34,1	70,5	36,5	—	50,8	70	M 10	15	19,8	14	7,8	0,335	7 000	SYF 25 TF
	38	25	34,1	73	36,5	10	56	84	M 10	15	19,8	14	7,8	0,335	7 000	SYFJ 25 TF
30	40	25	38,1	83	42,9	—	76,2	98	M 10	15	22,2	19,5	11,2	0,475	6 300	SYF 30 TF
	48	28,5	38,1	85	42,9	10	66	94	M 14	18	22,2	19,5	11,2	0,475	6 300	SYFJ 30 TF
35	45	27	42,9	93	47,6	—	82,6	103	M 10	15	25,4	25,5	15,3	0,655	5 300	SYF 35 TF
	48	30,5	42,9	96	47,6	12	80	110	M 14	20	25,4	25,5	15,3	0,655	5 300	SYFJ 35 TF
40	48	30	49,2	99	49,2	—	88,9	116	M 12	20	30,2	30,7	19	0,8	4 800	SYF 40 TF
	54	31,5	49,2	101	49,2	12	84	116	M 14	20	30,2	30,7	19	0,8	4 800	SYFJ 40 TF
45	48	32	49,2	107,5	54	—	95,3	120	M 12	22	30,2	33,2	21,6	0,915	4 300	SYF 45 TF
	54	33,5	49,2	109	54,2	12	90	120	M 14	25	30,2	33,2	21,6	0,915	4 300	SYFJ 45 TF
50	54	34	51,6	114,5	57,2	—	101,6	135	M 16	25,5	32,6	35,1	23,2	0,98	4 000	SYF 50 TF
	60	35,5	51,6	117	57,2	14	94	130	M 16	25	32,6	35,1	23,2	0,98	4 000	SYFJ 50 TF

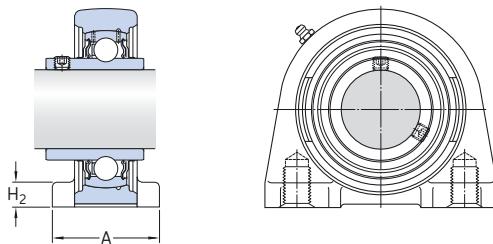


SYFJ

Designations	Mass	
Bearing unit	Separate components	Bearing unit
	Housing	Bearing

			kg
SYF 20 TF	SYF 504	YAR 204-2F	0,43
SYFJ 20 TF	SYFJ 504	YAR 204-2F	0,54
SYF 25 TF	SYF 505	YAR 205-2F	0,52
SYFJ 25 TF	SYFJ 505	YAR 205-2F	0,67
SYF 30 TF	SYF 506	YAR 206-2F	0,90
SYFJ 30 TF	SYFJ 506	YAR 206-2F	1,00
SYF 35 TF	SYF 507	YAR 207-2F	1,20
SYFJ 35 TF	SYFJ 507	YAR 207-2F	1,40
SYF 40 TF	SYF 508	YAR 208-2F	1,50
SYFJ 40 TF	SYFJ 508	YAR 208-2F	1,60
SYF 45 TF	SYF 509	YAR 209-2F	1,80
SYFJ 45 TF	SYFJ 509	YAR 209-2F	1,85
SYF 50 TF	SYF 510	YAR 210-2F	2,20
SYFJ 50 TF	SYFJ 510	YAR 210-2F	2,30


**Y-bearing plummer block units with a shortened cast housing and an eccentric locking collar,
metric shafts
d 20 – 50 mm**

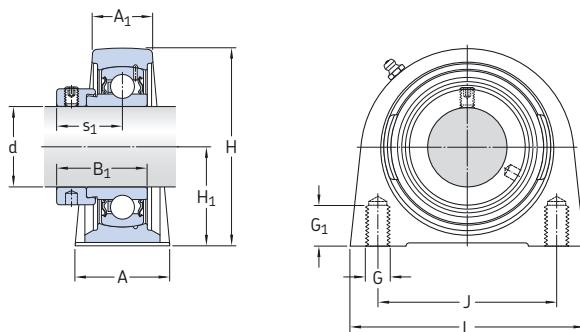

Dimensions												Basic load ratings dynamic C static C ₀	Fatigue load limit P _u	Limiting speed with shaft tolerance r/min	Designation Bearing unit h6
d	A	A ₁	B ₁	H	H ₁	J	L	G	G ₁	s ₁					
mm												kN	kN	r/min	–
20	32	21	31	65	33,3	50,8	65	M 8	14	23,5	12,7	6,55	0,28	8 500	SYF 20 FM
25	36	22	31	70,5	36,5	50,8	70	M 10	15	23,5	14	7,8	0,335	7 000	SYF 25 FM
30	40	25	35,7	83	42,9	76,2	98	M 10	15	26,7	19,5	11,2	0,475	6 300	SYF 30 FM
35	45	27	38,9	93	47,6	82,6	103	M 10	15	29,4	25,5	15,3	0,655	5 300	SYF 35 FM
40	48	30	43,7	99	49,2	88,9	116	M 12	20	32,7	30,7	19	0,8	4 800	SYF 40 FM
45	48	32	43,7	107,5	54	95,3	120	M 12	22	32,7	33,2	21,6	0,915	4 300	SYF 45 FM
50	54	34	43,7	114,5	57,2	101,6	135	M 16	25,5	32,7	35,1	23,2	0,98	4 000	SYF 50 FM

Designations Bearing unit	Separate components		Mass Bearing unit
-	Housing	Bearing	kg
SYF 20 FM	SYF 504	YET 204	0,43
SYF 25 FM	SYF 505	YET 205	0,52
SYF 30 FM	SYF 506	YET 206	0,90
SYF 35 FM	SYF 507	YET 207	1,20
SYF 40 FM	SYF 508	YET 208	1,50
SYF 45 FM	SYF 509	YET 209	1,80
SYF 50 FM	SYF 510	YET 210	2,20

**Y-bearing plummer block units with a pressed steel housing and grub screws,
metric shafts
d 12 – 35 mm**

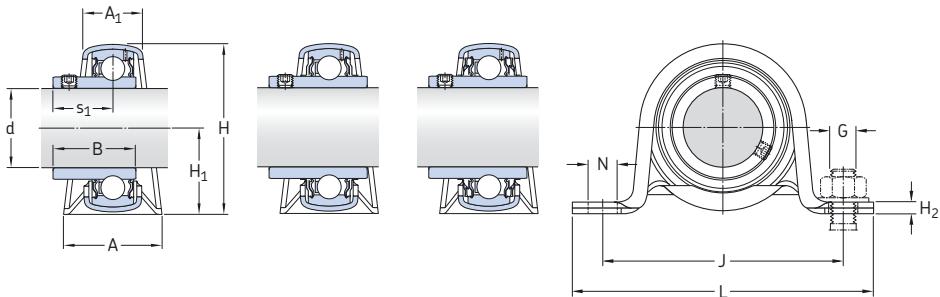


P + YAT

P + YAR-2F

P + YAR-2RF

Dimensions	d	A	A ₁	B	H	H ₁	H ₂	J	L	N	G	s ₁	Basic load ratings		Fatigue load limit P _u	Permissible housing load radial	Designation Bearing unit No order designation
													C	C ₀			
mm													kN		kN		–
12	26	18	27,4	44	22	3	68	86	9,6	8	15,9	9,56	4,75	0,2	1,25	P 12 TF	
	32	21	27,4	50	25,2	3	76	99	9,6	8	15,9	9,56	4,75	0,2	1,7	P 47 R-12 TF	
15	26	18	27,4	44	22	3	68	86	9,6	8	15,9	9,56	4,75	0,2	1,25	P 15 TF	
	32	21	27,4	50	25,2	3	76	99	9,6	8	15,9	9,56	4,75	0,2	1,7	P 47 R-15 TF	
17	26	18	22,1	44	22	3	68	86	9,6	8	15,9	9,56	4,75	0,2	1,25	P 17 RM	
	26	18	27,4	44	22	3	68	86	9,6	8	15,9	9,56	4,75	0,2	1,25	P 17 TF	
	32	21	22,1	50	25,2	3	76	99	9,6	8	15,9	9,56	4,75	0,2	1,7	P 47 R-17 RM	
	32	21	27,4	50	25,2	3	76	99	9,6	8	15,9	9,56	4,75	0,2	1,7	P 47 R-17 TF	
20	32	21	25,5	50	25,2	3	76	99	9,6	8	18,3	12,7	6,55	0,28	1,7	P 20 RM	
	32	21	31	50	25,2	3	76	99	9,6	8	18,3	12,7	6,55	0,28	1,7	P 20 TF	
	32	21	31	50	25,2	3	76	99	9,6	8	18,3	12,7	6,55	0,28	1,7	P 20 TR	
	32	24	25,5	56	28,3	3,2	86	108	11,2	10	18,3	12,7	6,55	0,28	1,8	P 52 R-20 RM	
	32	24	31	56	28,3	3,2	86	108	11,2	10	18,3	12,7	6,55	0,28	1,8	P 52 R-20 TF	
25	32	24	27,2	56	28,3	3,2	86	108	11,2	10	19,5	14	7,8	0,335	1,8	P 25 RM	
	32	24	34,1	56	28,3	3,2	86	108	11,2	10	19,8	14	7,8	0,335	1,8	P 25 TF	
	32	24	34,1	56	28,3	3,2	86	108	11,2	10	19,8	14	7,8	0,335	1,8	P 25 TR	
	38	25	27,2	66	32,9	4	95	119	11,2	10	19,5	14	7,8	0,335	2,6	P 62 R-25 RM	
	38	25	34,1	66	32,9	4	95	119	11,2	10	19,8	14	7,8	0,335	2,6	P 62 R-25 TF	
30	38	25	30,2	66	32,9	4	95	119	11,2	10	21	19,5	11,2	0,475	2,6	P 30 RM	
	38	25	38,1	66	32,9	4	95	119	11,2	10	22,2	19,5	11,2	0,475	2,6	P 30 TF	
	38	25	38,1	66	32,9	4	95	119	11,2	10	22,2	19,5	11,2	0,475	2,6	P 30 TR	
	41	27	30,2	78	39,2	5	106	130	11,2	10	21	19,5	11,2	0,475	3,3	P 72 R-30 RM	
	41	27	38,1	78	39,2	5	106	130	11,2	10	22,2	19,5	11,2	0,475	3,3	P 72 R-30 TF	
35	41	27	33	78	39,2	5	106	130	11,2	10	23,3	25,5	15,3	0,655	3,3	P 35 RM	
	41	27	42,9	78	39,2	5	106	130	11,2	10	25,4	25,5	15,3	0,655	3,3	P 35 TF	
	41	27	42,9	78	39,2	5	106	130	11,2	10	25,4	25,5	15,3	0,655	3,3	P 35 TR	
	43	29	33	86	43,5	5	120	148	14	12	23,3	25,5	15,3	0,655	3,8	P 80 R-35 RM	
	43	29	42,9	86	43,5	5	120	148	14	12	25,4	25,5	15,3	0,655	3,8	P 80 R-35 TF	

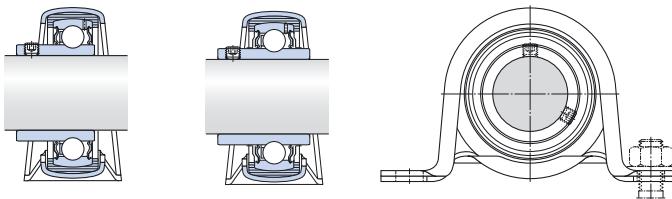


P + RIS + YAT

P + RIS + YAR-2F

Designation Bearing unit No order designation	Order designations Housing	Bearing	Rubber seating ring	Mass Bearing unit
-	-			kg
P 12 TF	P 40	YAR 203/12-2F	-	0,18
P 47 R-12 TF	P 47	YAR 203/12-2F	RIS 203	0,22
P 15 TF	P 40	YAR 203/15-2F	-	0,17
P 47 R-15 TF	P 47	YAR 203/15-2F	RIS 203	0,21
P 17 RM	P 40	YAT 203	-	0,15
P 17 TF	P 40	YAR 203-2F	-	0,16
P 47 R-17 RM	P 47	YAT 203	RIS 203	0,19
P 47 R-17 TF	P 47	YAR 203-2F	RIS 203	0,20
P 20 RM	P 47	YAT 204	-	0,19
P 20 TF	P 47	YAR 204-2F	-	0,22
P 20 TR	P 47	YAR 204-2RF	-	0,22
P 52 R-20 RM	P 52	YAT 204	RIS 204	0,23
P 52 R-20 TF	P 52	YAR 204-2F	RIS 204	0,26
P 25 RM	P 52	YAT 205	-	0,24
P 25 TF	P 52	YAR 205-2F	-	0,27
P 25 TR	P 52	YAR 205-2RF	-	0,27
P 62 R-25 RM	P 62	YAT 205	RIS 205	0,35
P 62 R-25 TF	P 62	YAR 205-2F	RIS 205	0,38
P 30 RM	P 62	YAT 206	-	0,42
P 30 TF	P 62	YAR 206-2F	-	0,47
P 30 TR	P 62	YAR 206-2RF	-	0,47
P 72 R-30 RM	P 72	YAT 206	RIS 206	0,53
P 72 R-30 TF	P 72	YAR 206-2F	RIS 206	0,58
P 35 RM	P 72	YAT 207	-	0,57
P 35 TF	P 72	YAR 207-2F	-	0,67
P 35 TR	P 72	YAR 207-2RF	-	0,67
P 80 R-35 RM	P 80	YAT 207	RIS 207	0,64
P 80 R-35 TF	P 80	YAR 207-2F	RIS 207	0,74

**Y-bearing plummer block units with a pressed steel housing and grub screws,
metric shafts
d 40 – 45 mm**

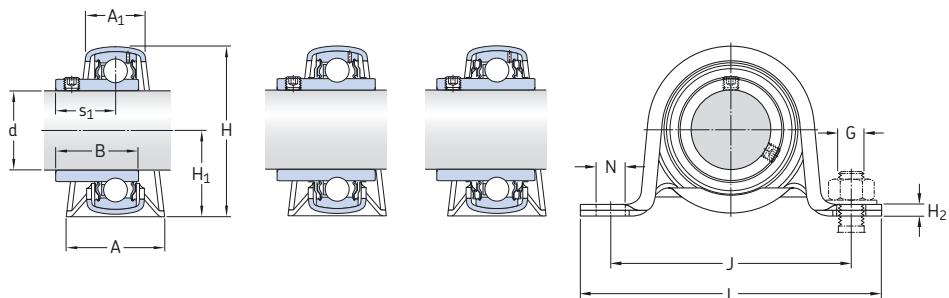


P + YAT

P + YAR-2F

P + YAR-2RF

Dimensions												Basic load ratings dynamic C static C ₀	Fatigue load limit P _u	Permissible housing load radial	Designation Bearing unit No order designation	
d	A	A ₁	B	H	H ₁	H ₂	J	L	N	G	s ₁					
mm												kN		kN		
40	43	29	36	86	43,5	5	120	148	14	12	25,3	30,7	19	0,8	3,8	P 40 RM
	43	29	49,2	86	43,5	5	120	148	14	12	30,2	30,7	19	0,8	3,8	P 40 TF
	43	29	49,2	86	43,5	5	120	148	14	12	30,2	30,7	19	0,8	3,8	P 40 TR
	45	31	36	92	46,4	6	128	156	14	12	25,3	30,7	19	0,8	4,2	P 85 R-40 RM
	45	31	49,2	92	46,4	6	128	156	14	12	30,2	30,7	19	0,8	4,2	P 85 R-40 TF
45	45	31	37	92	46,4	6	128	156	14	12	25,8	33,2	21,6	0,915	4,2	P 45 RM
	45	31	49,2	92	46,4	6	128	156	14	12	30,2	33,2	21,6	0,915	4,2	P 45 TF
	45	31	49,2	92	46,4	6	128	156	14	12	30,2	33,2	21,6	0,915	4,2	P 45 TR



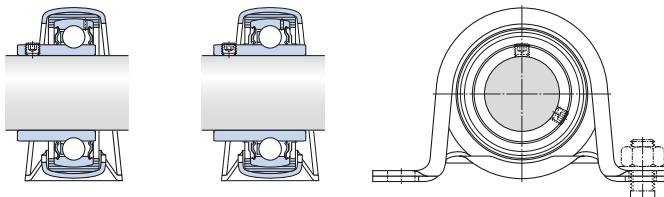


P + RIS + YAT

P + RIS + YAR-2F

Designation Bearing unit No order designation	Order designations			Mass Bearing unit
		Housing	Bearing	Rubber seating ring
-	-	-	-	kg
P 40 RM	P 80	YAT 208	-	0,80
P 40 TF	P 80	YAR 208-2F	-	0,92
P 40 TR	P 80	YAR 208-2RF	-	0,92
P 85 R-40 RM	P 85	YAT 208	RIS 208	0,93
P 85 R-40 TF	P 85	YAR 208-2F	RIS 208	1,05
P 45 RM	P 85	YAT 209	-	0,88
P 45 TF	P 85	YAR 209-2F	-	1,00
P 45 TR	P 85	YAR 209-2RF	-	1,00

Y-bearing plummer block units with a pressed steel housing and grub screws, inch shafts
d 3/4 – 1 3/4 in

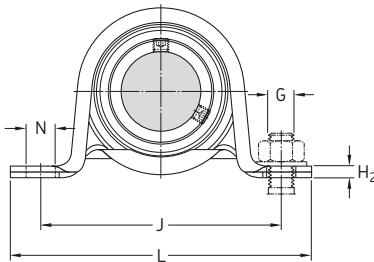


P + YAR-2F

P + YAR-2RF

Dimensions


													Designation
	d	A	A ₁	B	H	H ₁	H ₂	J	L	N	G	s ₁	Bearing unit No order designation
in/mm													
3/4 19,05	1.26	0.83	1.22	1.97	0.99	0.12	2.99	3.90	0.38	5/16	0.72		P 3/4 TF
	32	21	31	50	25,2	3	76	99	9,6	8	18,3		
	1.26	0.83	1.22	1.97	0.99	0.12	2.99	3.90	0.38	5/16	0.72		P 3/4 TR
	32	21	31	50	25,2	3	76	99	9,6	8	18,3		
	1.26	0.94	1.22	2.20	1.11	0.13	3.39	4.25	0.44	3/8	0.72		P 52 R-3/4 TF
1 25,4	1.26	0.94	1.34	2.20	1.11	0.13	3.39	4.25	0.44	3/8	0.78		P 1.TF
	32	24	34,1	56	28,3	3,2	86	108	11,2	10	19,8		
	1.26	0.94	1.34	2.20	1.11	0.13	3.39	4.25	0.44	3/8	0.78		P 1.TR
	32	24	34,1	56	28,3	3,2	86	108	11,2	10	19,8		
	1.50	0.98	1.34	2.60	1.30	0.16	3.74	4.69	0.44	3/8	0.78		P 62 R-1.TF
1 1/4 31,75	1.61	1.06	1.69	3.07	1.54	0.20	4.17	5.12	0.44	3/8	1.00		P 1.1/4 TF
	41	27	42,9	78	39,2	5	106	130	11,2	10	25,4		
	1.61	1.06	1.69	3.07	1.54	0.20	4.17	5.12	0.44	3/8	1.00		P 1.1/4 TR
	41	27	42,9	78	39,2	5	106	130	11,2	10	25,4		
	1.69	1.14	1.69	3.39	1.71	0.20	4.72	5.83	0.55	1/2	1.00		P 80 R-1.1/4 TF
1 1/2 38,1	1.69	1.14	1.94	3.39	1.71	0.20	4.72	5.83	0.55	1/2	1.19		P 1.1/2 TF
	43	29	49,2	86	43,5	5	120	148	14	12	30,2		
	1.69	1.14	1.94	3.39	1.71	0.20	4.72	5.83	0.55	1/2	1.19		P 1.1/2 TR
	43	29	49,2	86	43,5	5	120	148	14	12	30,2		
	1.77	1.22	1.94	3.62	1.83	0.24	5.04	6.14	0.55	1/2	1.19		P 85 R-1.1/2 TF
1 3/4 44,45	1.77	1.22	1.94	3.62	1.83	0.24	5.04	6.14	0.55	1/2	1.19		P 1.3/4 TF
	45	31	49,2	92	46,4	6	128	156	14	12	30,2		
	1.77	1.22	1.94	3.62	1.83	0.24	5.04	6.14	0.55	1/2	1.19		P 1.3/4 TR
	45	31	49,2	92	46,4	6	128	156	14	12	30,2		

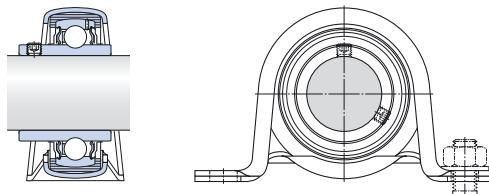

P + RIS + YAR-2F

Designation Bearing unit No order designation	Order designations Housing Bearing		Rubber seating ring	Basic load ratings dynamic C static C ₀		Fatigue load limit P _u	Permissible housing load radial	Mass Bearing unit
-	-	-	-	lbf/kN	lbf/kN	lbf/kN	lb/kg	
P 3/4 TF	P 47	YAR 204-012-2F	-	2 860 12,7	1 470 6,55	60 0,28	380 1,7	0,51 0,23
P 3/4 TR	P 47	YAR 204-012-2RF	-	2 860 12,7	1 470 6,55	60 0,28	380 1,7	0,51 0,23
P 52 R-3/4 TF	P 52	YAR 204-012-2F	RIS 204	2 860 12,7	1 470 6,55	60 0,28	410 1,8	0,60 0,27
P 1. TF	P 52	YAR 205-100-2F	-	3 150 14	1 760 7,8	80 0,335	410 1,8	0,60 0,27
P 1. TR	P 52	YAR 205-100-2RF	-	3 150 14	1 760 7,8	80 0,335	410 1,8	0,60 0,27
P 62 R-1.TF	P 62	YAR 205-100-2F	RIS 205	3 150 14	1 760 7,8	80 0,335	590 2,6	0,84 0,38
P 1.1/4 TF	P 72	YAR 207-104-2F	-	5 740 25,5	3 440 15,3	150 0,655	740 3,3	1,61 0,73
P 1.1/4 TR	P 72	YAR 207-104-2RF	-	5 740 25,5	3 440 15,3	150 0,655	740 3,3	1,61 0,73
P 80 R-1.1/4 TF	P 80	YAR 207-104-2F	RIS 207	5 740 25,5	3 440 15,3	150 0,655	860 3,8	1,92 0,87
P 1.1/2 TF	P 80	YAR 208-108-2F	-	6 910 30,7	4 280 19	180 0,8	860 3,8	2,14 0,97
P 1.1/2 TR	P 80	YAR 208-108-2RF	-	6 910 30,7	4 280 19	180 0,8	860 3,8	2,14 0,97
P 85 R-1.1/2 TF	P 85	YAR 208-108-2F	RIS 208	6 910 30,7	4 280 19	180 0,8	950 4,2	2,45 1,10
P 1.3/4 TF	P 85	YAR 209-112-2F	-	7 470 33,2	4 860 21,6	210 0,915	950 4,2	2,25 1,00
P 1.3/4 TR	P 85	YAR 209-112-2RF	-	7 470 33,2	4 860 21,6	210 0,915	950 4,2	2,25 1,00


**Y-bearing plummer block units with a pressed steel housing and an eccentric locking collar,
metric shafts**
d 15 – 45 mm

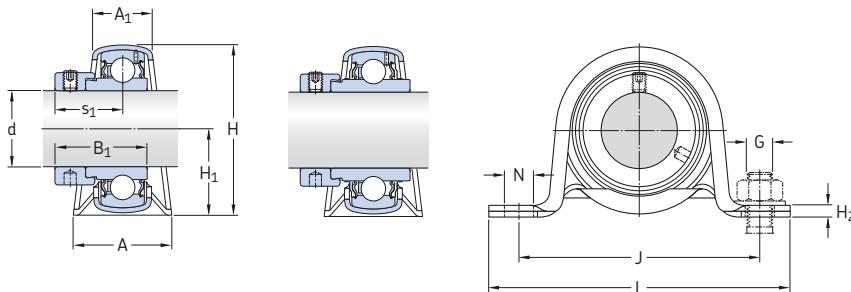

P + YET

P + YEL-2F

Dimensions													Basic load ratings dynamic C static C ₀	Fatigue load limit P _u	Permissible housing load radial	Designation Bearing unit No order designation
d	A	A ₁	B ₁	H	H ₁	H ₂	J	L	N	G	s ₁					
mm													kN	kN	kN	–
15	26	18	28,6	44	22	3	68	86	9,6	8	22,1	9,56	4,75	0,2	1,25	P 15 FM
	32	21	28,6	50	25,2	3	76	99	9,6	8	22,1	9,56	4,75	0,2	1,7	P 47 R-15 FM
17	26	18	28,6	44	22	3	68	86	9,6	8	22,1	9,56	4,75	0,2	1,25	P 17 FM
	32	21	28,6	50	25,2	3	76	99	9,6	8	22,1	9,56	4,75	0,2	1,7	P 47 R-17 FM
20	32	21	31	50	25,2	3	76	99	9,6	8	23,5	12,7	6,55	0,28	1,7	P 20 FM
	32	21	43,7	50	25,2	3	76	99	9,6	8	26,6	12,7	6,55	0,28	1,7	P 20 WF
	32	24	31	56	28,3	3,2	86	108	11,2	10	23,5	12,7	6,55	0,28	1,8	P 52 R-20 FM
	32	24	43,7	56	28,3	3,2	86	108	11,2	10	26,6	12,7	6,55	0,28	1,8	P 52 R-20 WF
25	32	24	31	56	28,3	3,2	86	108	11,2	10	23,5	14	7,8	0,335	1,8	P 25 FM
	32	24	44,4	56	28,3	3,2	86	108	11,2	10	26,9	14	7,8	0,335	1,8	P 25 WF
	38	25	31	66	32,9	4	95	119	11,2	10	23,5	14	7,8	0,335	2,6	P 62 R-25 FM
	38	25	44,4	66	32,9	4	95	119	11,2	10	26,9	14	7,8	0,335	2,6	P 62 R-25 WF
30	38	25	35,7	66	32,9	4	95	119	11,2	10	26,7	19,5	11,2	0,475	2,6	P 30 FM
	38	25	48,4	66	32,9	4	95	119	11,2	10	30,1	19,5	11,2	0,475	2,6	P 30 WF
	41	27	35,7	78	39,2	5	106	130	11,2	10	26,7	19,5	11,2	0,475	3,3	P 72 R-30 FM
	41	27	48,4	78	39,2	5	106	130	11,2	10	30,1	19,5	11,2	0,475	3,3	P 72 R-30 WF
35	41	27	38,9	78	39,2	5	106	130	11,2	10	29,4	25,5	15,3	0,655	3,3	P 35 FM
	41	27	51,1	78	39,2	5	106	130	11,2	10	32,3	25,5	15,3	0,655	3,3	P 35 WF
	43	29	38,9	86	43,5	5	120	148	14	12	29,4	25,5	15,3	0,655	3,8	P 80 R-35 FM
	43	29	51,1	86	43,5	5	120	148	14	12	32,3	25,5	15,3	0,655	3,8	P 80 R-35 WF
40	43	29	43,7	86	43,5	5	120	148	14	12	32,7	30,7	19	0,8	3,8	P 40 FM
	43	29	56,3	86	43,5	5	120	148	14	12	34,9	30,7	19	0,8	3,8	P 40 WF
	45	31	43,7	92	46,4	6	128	156	14	12	32,7	30,7	19	0,8	4,2	P 85 R-40 FM
	45	31	56,3	92	46,4	6	128	156	14	12	34,9	33,2	21,6	0,915	4,2	P 85 R-40 WF
45	45	31	43,7	92	46,4	6	128	156	14	12	32,7	33,2	21,6	0,915	4,2	P 45 FM
	45	31	56,3	92	46,4	6	128	156	14	12	34,9	33,2	21,6	0,915	4,2	P 45 WF

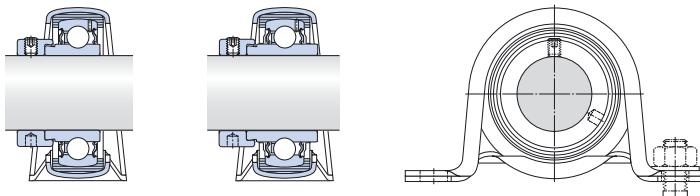


P + RIS + YET

P + RIS + YEL-2F

Designation Bearing unit No order designation	Order designations Housing	Bearing	Rubber seating ring	Mass Bearing unit
-	-			kg
P 15 FM P 47 R-15 FM	P 40 P 47	YET 203/15 YET 203/15	- RIS 203	0,18 0,23
P 17 FM P 47 R-17 FM	P 40 P 47	YET 203 YET 203	- RIS 203	0,18 0,22
P 20 FM P 20 WF P 52 R-20 FM P 52 R-20 WF	P 47 P 47 P 52 P 52	YET 204 YEL 204-2F YET 204 YEL 204-2F	- - RIS 204 RIS 204	0,24 0,27 0,28 0,31
P 25 FM P 25 WF P 62 R-25 FM P 62 R-25 WF	P 52 P 52 P 62 P 62	YET 205 YEL 205-2F YET 205 YEL 205-2F	- - RIS 205 RIS 205	0,28 0,33 0,39 0,44
P 30 FM P 30 WF P 72 R-30 FM P 72 R-30 WF	P 62 P 62 P 72 P 72	YET 206 YEL 206-2F YET 206 YEL 206-2F	- - RIS 206 A RIS 206 A	0,45 0,41 0,60 0,66
P 35 FM P 35 WF P 80 R-35 FM P 80 R-35 WF	P 72 P 72 P 80 P 80	YET 207 YEL 207-2F YET 207 YEL 207-2F	- - RIS 207 A RIS 207 A	0,75 0,83 0,82 0,90
P 40 FM P 40 WF P 85 R-40 FM P 85 R 40 WF	P 80 P 80 P 85 P 85	YET 208 YEL 208-2F YET 208 YEL 208-2F	- - RIS 208 A RIS 208 A	0,99 1,05 1,10 1,20
P 45 FM P 45 WF	P 85 P 85	YET 209 YEL 209-2F	- -	1,05 1,15

**Y-bearing plummer block units with a pressed steel housing and an eccentric locking collar,
inch shafts
d $\frac{3}{4}$ – 1 $\frac{1}{2}$ in**

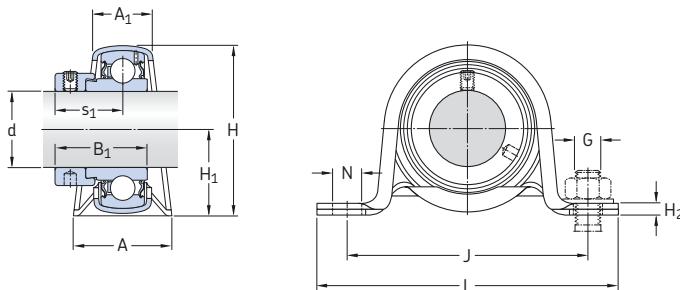


P + YET

Dimensions

Designation
Bearing unit
No order
designation

d	A	A ₁	B ₁	H	H ₁	H ₂	J	L	N	G	s ₁	
in/mm												
$\frac{3}{4}$ 19,05	1.26 32	0.83 21	1.22 31	1.97 50	0.99 25,2	0.12 3	2.99 76	3.90 99	0.38 9,6	$\frac{5}{16}$ 8	0.93 23,5	P 3/4 FM
	1.26 32	0.94 24	1.22 31	2.20 56	1.11 28,3	0.13 3,2	3.39 86	4.25 108	0.44 11,2	$\frac{3}{8}$ 10	0.93 23,5	P 52 R-3/4 FM
1 25,4	1.26 32	0.94 24	1.22 31	2.20 56	1.11 28,3	0.13 3,2	3.39 86	4.25 108	0.44 11,2	$\frac{3}{8}$ 10	0.93 23,5	P 1. FM
	1.50 38	0.98 25	1.22 31	2.60 66	1.30 32,9	0.16 4	3.74 95	4.69 119	0.44 11,2	$\frac{3}{8}$ 10	0.93 23,5	P 62 R-1. FM
$1\frac{1}{2}$ 38,1	1.69 43	1.14 29	1.72 43,7	3.39 86	1.71 43,5	0.20 5	4.72 120	5.83 148	0.55 14	$\frac{1}{2}$ 12	1.29 32,7	P 1.1/2 FM
	1.77 45	1.22 31	1.72 43,7	3.62 92	1.83 46,4	0.24 6	5.04 128	6.14 156	0.55 14	$\frac{1}{2}$ 12	1.29 32,7	P 85 R-1.1/2 FM

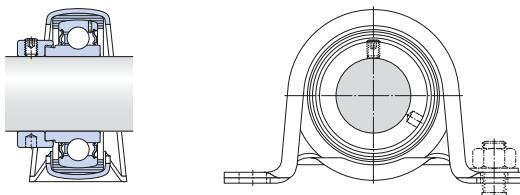

P + RIS + YET

Designation Bearing unit No order designation	Order designations Housing Bearing		Rubber seating ring	Basic load ratings dynamic C static C_0		Fatigue load limit P_u	Permissible housing load radial	Mass Bearing unit
-	-	-	-	lbf/kN	lbf/kN	lbf/kN	lb/kg	
P 3/4 FM	P 47	YET 204-012	-	2 860 12,7	1 470 6,55	60 0,28	380 1,7	0,57 0,26
P 52 R-3/4 FM	P 52	YET 204-012	RIS 204	2 860 12,7	1 470 6,55	60 0,28	410 1,8	0,66 0,30
P 1. FM	P 52	YET 205-100	-	3 150 14	1 760 7,8	80 0,335	410 1,8	0,62 0,28
P 62 R-1. FM	P 62	YET 205-100	RIS 205	3 150 14	1 760 7,8	80 0,335	590 2,6	0,86 0,39
P 1.1/2 FM	P 80	YET 208-108	-	6 910 30,7	4 280 19	180 0,8	860 3,8	2,25 1,00
P 85 R-1.1/2 FM	P 85	YET 208-108	RIS 208 A	6 910 30,7	4 280 19	180 0,8	950 4,2	2,55 1,15



Flanged Y-bearing units

Designs	164
Flanged Y-TECH units	165
Flanged Y-bearing units with a cast housing	166
Flanged Y-bearing units with a pressed steel housing	167
Data – general	170
Dimensions	170
Tolerances	170
Radial internal clearance	170
Materials	170
Load carrying ability of the housings	170
Attaching to a support surface	171
End covers	173
Grease fills	173
Mounting	173
Product tables	174
4.1 Flanged Y-TECH units with a housing with a square flange and grub screws, metric shafts	174
4.2 Flanged Y-TECH units with a housing with an oval flange and grub screws, metric shafts	176
4.3 Flanged Y-bearing units with a cast housing with a square flange and grub screws, metric shafts	178
inch shafts	182
4.4 Flanged Y-bearing units with a cast housing with a square flange and an eccentric locking collar, metric shafts	188
inch shafts	190
4.5 Flanged Y-bearing units with a cast housing with a square flange and an adapter sleeve, metric shafts	194
inch shafts	196
4.6 Flanged Y-bearing units with a cast housing with an oval flange and grub screws, metric shafts	200
inch shafts	202
4.7 Flanged Y-bearing units with a cast housing with an oval flange and an eccentric locking collar metric shafts	208
inch shafts	210
4.8 Flanged Y-bearing units with a cast housing with an oval flange and an adapter sleeve, metric shafts	214
inch shafts	216
4.9 Flanged Y-bearing units with a cast housing with a round flange and grub screws. metric shafts	218
4.10 Flanged Y-bearing units with a pressed steel housing and grub screws, metric shafts	220
inch shafts	224
4.11 Flanged Y-bearing units with a pressed steel housing and an eccentric locking collar, metric shafts	228
inch shafts	232
SKF	163

Designs

SKF flanged Y-bearing units are available as standard in a wide variety of designs. The standard assortment includes flanged Y-bearing units with housings made of:

- composite material (→ **fig. 1**)
- grey cast iron (→ **fig. 2**)
- pressed sheet steel (→ **fig. 3**)

They are located on the shaft via the inner ring of the insert bearing with either:

- grub (set) screws
- an eccentric locking collar
- an adapter sleeve

The Y-bearing can be sealed with either:

- the standard integral seal
- the standard integral seal and an additional flinger
- the highly efficient multiple seal

For additional information about Y-bearings, refer to the section *Y-bearings*, starting on **page 79**.

Flanged Y-bearing units available from stock are listed in the product tables. Other units can be assembled by ordering the parts separately. The tables on **pages 168 to 169** show the wide variety of combinations of Y-bearings and flanged housings.



Fig. 1



Fig. 2



Fig. 3

Flanged Y-TECH units

Flanged Y-TECH units have housings made of composite material. They were developed for bearing arrangements that must operate reliably in difficult environments for extended periods without maintenance. There are two standard series available:

- FYK series (→ fig. 4) with a square flange and four bolt holes
- FYTBK series (→ fig. 5) with an oval flange and two bolt holes

For additional information about Y-bearing units for the food industry, refer to **page 274**.

Flanged Y-TECH units in the FYK series are fitted with Y-bearings in the:

- YAR 2-2F series, unit designation suffix TF
- YAR 2-2RF series, unit designation suffix TR

These units, which are attached to the shaft with grub screws, are in the standard SKF assortment.

Fig. 4



Fig. 5



Fig. 6



Flanged Y-bearing units with a cast housing

Flanged Y-bearing units with a cast housing can be relubricated through a grease fitting in the housing. This makes them especially suitable for bearing arrangements that operate under any of the following conditions:

- high levels of contamination
- high speeds
- high temperatures
- relatively heavy loads

Three different housing designs are available:

- FY and FYJ series with a square flange and four holes for attachment bolts (**→ fig. 6**)
- FYC series with a round flange and four holes for attachment bolts (**→ fig. 7**)
- FYT, FYTB and FYTJ series with an oval flange and two holes for attachment bolts (**→ fig. 8**).

Fig. 7



Fig. 8



Flanged Y-bearing units with a pressed steel housing

Flanged Y-bearing units with a pressed steel housing are designed for simple applications with limited loads and speeds. The two-part housing, which has no provision for relubrication, is ordered separately from the insert bearing, making a large number of combinations possible.

The flanged housings made of pressed steel are available in three different series:

- PF series with a round flange and three or four square holes for attachment bolts (**→ fig. 9**)
- PFD series with a triangular flange and three square holes for attachment bolts (**→ fig. 10**)
- PFT series with an oval flange and two square holes for attachment bolts (**→ fig. 11**)

Fig. 9





Fig. 10




Fig. 11



Flanged Y-bearing units

Flanged Y-bearing unit	Housings of composite material		Cast housings			
						
Y-bearings	FYK 5(00)	FYTBK 5(00)	FY 5(00)	FYJ 5(00)	FYM 5(00)	FYT 5(00)
YAR 2-2F 	FYK .. TF 20–40 mm 3/4–1 1/2 in. ¹⁾	FYTBK .. TF 20–35 mm 3/4–1 1/4 in. ¹⁾	FY .. TF 12–65 mm 1/2–2 15/16 in.	FYJ .. TF 20–100 mm 3/4–2 1/2 in. ¹⁾	FYM .. TF 1 7/16–3 in.	FYT .. TF 1/2–2 3/16 in.
YAR 2-2RF 	FYK .. TR 20–40 mm 3/4–1 1/2 in. ¹⁾	FYTBK .. TR 20–35 mm 3/4–1 1/4 in. ¹⁾	FY .. TR 20–60 mm 3/4–2 1/2 in. ¹⁾	20–60 mm ¹⁾ 3/4–2 1/2 in. ¹⁾	–	–
YAR 2-2RF/HV 	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–35 mm ¹⁾ 3/4–1 7/16 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	–	–
YAR 2-2RF/VE495 	20–40 mm ¹⁾	20–35 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾	–	–
YAT 2 	20–40 mm ¹⁾	20–35 mm ¹⁾	17–50 mm ¹⁾	20–50 mm ¹⁾	–	FYT .. RM 1/2–2 3/16 in.
YEL 2-2F 	20–40 mm ¹⁾	20–35 mm ¹⁾	FY .. WF 20–60 mm 1–2 7/16 in.	20–50 mm ¹⁾	–	–
YEL 2-2RF/VL065 	20–40 mm ¹⁾	20–35 mm ¹⁾	20–40 mm ¹⁾	20–40 mm ¹⁾	–	–
YET 2 	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–35 mm ¹⁾ 3/4–1 7/16 in. ¹⁾	FY .. FM 15–60 mm 3/4–2 3/16 in.	20–60 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	–	FYT .. FM 1/2–2 3/16 in.
YSA 2-2FK on adapter sleeve 	20–35 mm ¹⁾ 3/4–1 1/4 in. ¹⁾	20–30 mm ¹⁾ 3/4–1 3/16 in. ¹⁾	20–60 mm ¹⁾ 3/4–2 3/8 in. ¹⁾	FYJ .. KF 20–60 mm 3/4–2 3/8 in.	–	–
17262(00) 	20–40 mm ¹⁾	20–35 mm ¹⁾	17–60 mm ¹⁾	20–60 mm ¹⁾	–	–

¹⁾ Parts must be ordered separately.

	Cast housings			Pressed steel housings		
						
Y-bearings	FYTB 5(00)	FYTJ 5(00)	FYC 5(00)	PF	PFD	PFT
YAR 2-2F 	FYTB .. TF 20–50 mm 3/4–1 3/4 in. ¹⁾	FYTJ .. TF 20–50 mm 3/4–1 3/4 in. ¹⁾	FYC .. TF 20–65 mm 3/4–2 1/2 in. ¹⁾	12–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	12–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	12–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YAR 2-2RF 	FYTB .. TR 20–50 mm 3/4–1 3/4 in. ¹⁾	20–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–65 mm ¹⁾ 3/4–2 1/2 in. ¹⁾	20–35 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YAR 2-2RF/HV 	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾					
YAR 2-2RF/VE495 	20–40 mm ¹⁾					
YAT 2 	17–50 mm ¹⁾	20–50 mm ¹⁾	20–50 mm ¹⁾	17–50 mm ¹⁾ 5/8–1 15/16 in. ¹⁾	17–40 mm ¹⁾ 5/8–1 1/2 in. ¹⁾	17–40 mm ¹⁾ 5/8–1 1/2 in. ¹⁾
YEL 2-2F 	FYTB .. WF 20–50 mm	20–50 mm ¹⁾	20–60 mm ¹⁾	20–50 mm ¹⁾ 1/2–1 15/16 in. ¹⁾	20–40 mm ¹⁾ 1/2–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 1/2–1 1/2 in. ¹⁾
YEL 2-2RF/VL065 	20–40 mm ¹⁾					
YET 2 	FYTB .. FM 15–50 mm 3/4–1 1/2 in. ¹⁾	20–50 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	20–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	15–50 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	15–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾	15–40 mm ¹⁾ 3/4–1 1/2 in. ¹⁾
YSA 2-2FK on adapter sleeve 	20–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	FYTJ .. KF 20–45 mm 3/4–1 3/4 in.	20–60 mm ¹⁾ 3/4–2 3/8 in. ¹⁾	20–45 mm ¹⁾ 3/4–1 3/4 in. ¹⁾	20–35 mm ¹⁾ 3/4–1 1/4 in. ¹⁾	20–35 mm ¹⁾ 3/4–1 3/4 in. ¹⁾
17262(00) 	17–50 mm ¹⁾	20–50 mm ¹⁾	20–60 mm ¹⁾	17–50 mm ¹⁾	17–40 mm ¹⁾	17–40 mm ¹⁾

¹⁾ Parts must be ordered separately.

Data – general

Dimensions

The boundary dimensions for most flanged Y-bearing housings are in accordance with the following standards:

- Housings in the FY, FYT and FYTB series are in accordance with ISO 3228:1993.
- Housings in the FYJ, FYTJ and FYC series are in accordance with JIS B 1559-1995.
- Housings in the PF, PFD and PFT series are in accordance with ISO 3228:1993.

Tolerances

For flanged Y-bearing units with a cast housing, the tolerance for the total width T of the unit (→ fig. 12) is:

- $\pm 0,5$ mm for units up to and including 50 mm bore diameter
- $\pm 0,6$ mm for larger units

For flanged Y-bearing units with housings made of composite material or grey cast iron, the outside diameter of the bearing is matched to the diameter of the housing bore so that the outer ring is prevented from turning in its seat, but still able to compensate for misalignment.


Additional information about tolerances for the inner ring bore are listed in the section *Y-bearings* on page 89.

Radial internal clearance

The Y-bearing used in a flanged Y-bearing unit has the same radial internal clearance as a similarly sized individual Y-bearing.

Additional information about the radial internal clearance can be found in the section *Y-bearings* on page 90.

Fig. 12

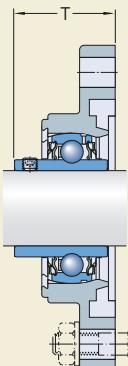

Materials

Composite housings

These housings are made of injection moulded glass fibre reinforced polyamide 6. A steel coil embedded in the housing adds greater stability to the form of the housing, even if temperatures are elevated.

The bolt holes for housings in the FYK and FYTBK series are reinforced with zinc-plated sheet steel inserts. The standard housing colour is black.

Cast housings

Cast housings are manufactured from grey cast iron EN-GJL HB195 in accordance with EN 1561:1997.

Pressed steel housings

Pressed steel housings are made from cold-rolled steel and are zinc-coated for corrosion protection.


Load carrying ability of the housings

Housings made of either composite material or grey cast iron are able to withstand the same dynamic and static loads as the Y-bearings they incorporate. These Y-bearing units can also be used for applications where shock loads or variable axial loads occur.

If SKFY-bearing units are to be used in an application where health, safety, or the environment is at risk, contact the SKF application engineering service during the design phase.

Fig. 13

4

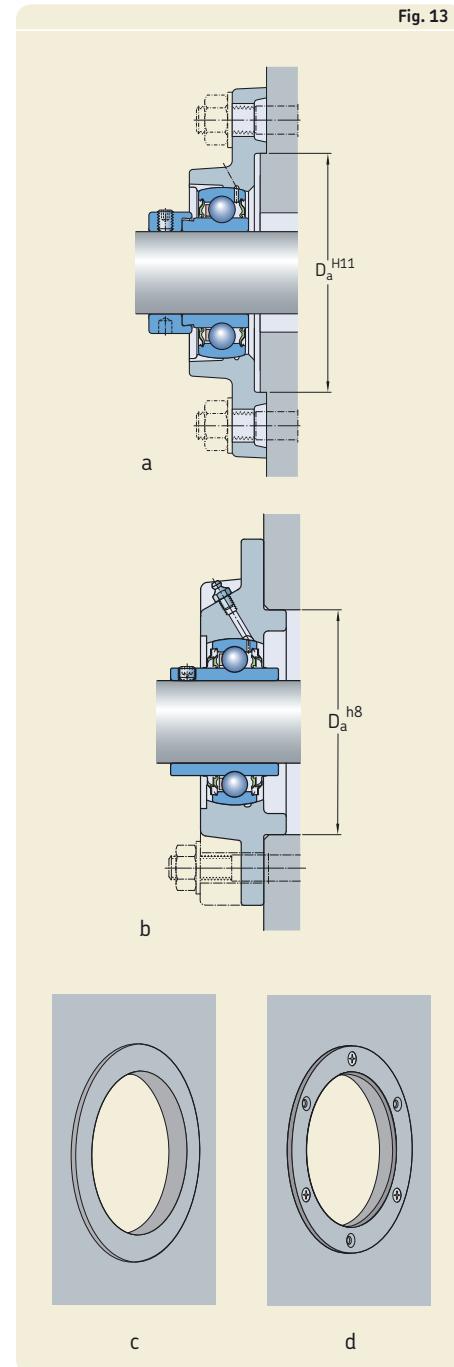

Pressed steel housings have a lower load carrying capacity than their insert bearings. Permissible radial loads are specified in the product tables. The axial load should not exceed 20% of the permissible radial load.

If the Y-bearing units will be subjected to shock loads or variable axial loads, a grey cast iron or Y-TECH housing should always be used.

Flanged composite housings and most grey cast iron housings have a recess (\rightarrow fig. 13a), or shoulder (\rightarrow fig. 13b) at the back for accurate positioning, either on an appropriate shoulder or in a bore in the machine wall.

An appropriate shoulder can be provided by one of the following methods:

- machining the wall accordingly (\rightarrow fig. 13c)
- attaching an appropriate washer to the wall by several screws (\rightarrow fig. 13d)

Furthermore, these features relieve the attachment bolts of radial forces.

Attaching to a support surface

Flanged Y-bearing units have two, three or four bolt holes through which they can be attached to their support surface with threaded fasteners. These bolt holes are:


- round and reinforced with pressed steel inserts in composite housings
- drilled and round in cast housings
- square in pressed steel housings

In the absence of a centring shoulder and when heavy loads apply, SKF recommends doweling the housing to its support surface. Dimples for the dowel pin holes are cast into housings in the FY, FYJ, FYTB and FYTJ series. Information on the position and size of the holes for these dowel pins is provided in **table 1**.

Flanged Y-bearing units


Table 1

Position and size of dowel pin holes for flanged Y-bearing housings made of grey cast iron

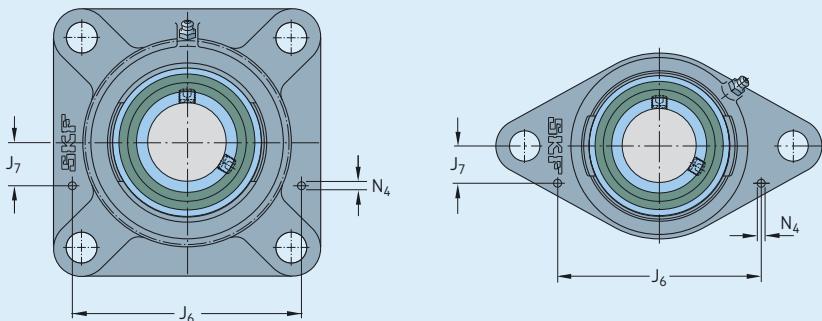

Housing size	Dimensions for housings in the FY, FYJ series			FYT, FYTB, FYTJ series		
	J ₆	J ₇	N ₄	J ₆	J ₇	N ₄
— mm						
503	66	12	4	61,5	11	2
504	74	16	4	74	11,5	2
505	83	19	4	81	12	4
506	96	24,5	4	99	12,5	4
507	106	29	4	106	15	5
508	118	34	4	116	16	6
509	123	33,5	5	120	18	6
510	129	35,5	5	127	20	6
511	148	45	5	154	18	6
512	161	49,5	5	—	—	—
513	169	51	6	—	—	—
514	169	49	8	—	—	—
515	176	51,5	8	—	—	—
516	184	51,5	8	—	—	—
518	207	52,5	8	—	—	—
520	233	55	8	—	—	—

Fig. 14

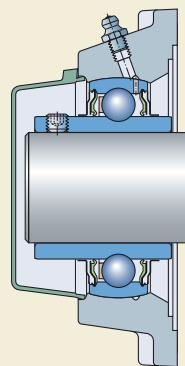

End covers

To protect the shaft ends and avoid any accidents, end covers are available for flanged Y-TECH units and most flanged Y-bearing units with a cast housing (→ **fig. 14**).

In the product tables, end covers in the ECY 2 series are shown together with the appropriate bearing unit. The designation of the end cover is listed together with the distance that the end cover protrudes from the housing.

For additional information about end covers, refer to the section *Design of Y-bearing arrangements*, on **page 47**.

Grease fills

All standard SKF flanged Y-bearing units are filled with a high-quality long-lasting grease containing a lithium-calcium thickener that has a consistency of 2 on the NLGI scale.

For additional information about lubricants and lubrication, refer to the section *Lubrication and maintenance*, starting on **page 48**.


Mounting

The procedure for mounting a flanged Y-bearing unit depends on:


- the design of the housing
- the method used to attach the unit to the shaft

These methods are described in detail in the section *Mounting instructions*, starting on **page 52**.

Flanged Y-TECH units with a housing with a square flange and grub screws, metric shafts
d 20 – 40 mm

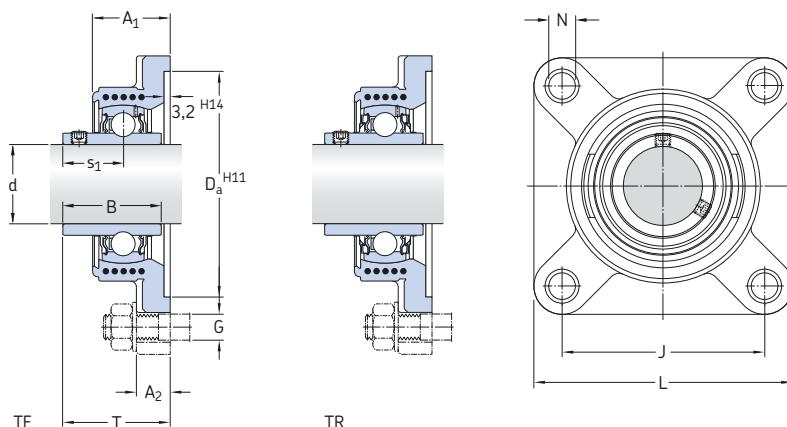


Dimensions	d	A ₁	A ₂	B	D _a	J	L	N	G	s ₁	T	Basic load ratings		Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Designation Bearing unit
												C	C ₀			
	mm											kN	kN	r/min	–	
20	30 15	31	68,3	63,5	86	12	10	18,3	37,3			12,7	6,55	0,28	8 500	FYK 20 TF
	30 15	31	68,3	63,5	86	12	10	18,3	37,3			12,7	6,55	0,28	5 000	FYK 20 TR
25	31 15	34,1	74,6	70	95	12	10	19,8	38,8			14	7,8	0,335	7 000	FYK 25 TF
	31 15	34,1	74,6	70	95	12	10	19,8	38,8			14	7,8	0,335	4 300	FYK 25 TR
30	33 15,3	38,1	93,7	82,5	108	12	10	22,2	42,2			19,5	11,2	0,475	6 300	FYK 30 TF
	33 15,3	38,1	93,7	82,5	108	12	10	22,2	42,2			19,5	11,2	0,475	3 800	FYK 30 TR
35	35 17	42,9	106,4	92	118	14,5	12	25,4	46,4			25,5	15,3	0,655	5 300	FYK 35 TF
	35 17	42,9	106,4	92	118	14,5	12	25,4	46,4			25,5	15,3	0,655	3 200	FYK 35 TR
40	39 17	49,2	115,9	101,5	130	14,5	12	30,2	54,2			30,7	19	0,8	4 800	FYK 40 TF
	39 17	49,2	115,9	101,5	130	14,5	12	30,2	54,2			30,7	19	0,8	2 800	FYK 40 TR




Designations Bearing unit			Mass Bearing unit	Appropriate end cover	
	Separate components	Housing		Designation	Dimension
				A ₅	
–	–	–	kg	–	mm
FYK 20 TF	FYK 504	YAR 204-2F	0,26	ECY 204	18,5
FYK 20 TR	FYK 504	YAR 204-2RF	0,26	ECY 204	18,5
FYK 25 TF	FYK 505	YAR 205-2F	0,33	ECY 205	18
FYK 25 TR	FYK 505	YAR 205-2RF	0,33	ECY 205	18
FYK 30 TF	FYK 506	YAR 206-2F	0,48	ECY 206	20
FYK 30 TR	FYK 506	YAR 206-2RF	0,48	ECY 206	20
FYK 35 TF	FYK 507	YAR 207-2F	0,66	ECY 207	22
FYK 35 TR	FYK 507	YAR 207-2RF	0,66	ECY 207	22
FYK 40 TF	FYK 508	YAR 208-2F	0,87	ECY 208	23,5
FYK 40 TR	FYK 508	YAR 208-2RF	0,87	ECY 208	23,5

**Flanged Y-TECH units with a housing with an oval flange and grub screws, metric shafts
d 20 – 35 mm**

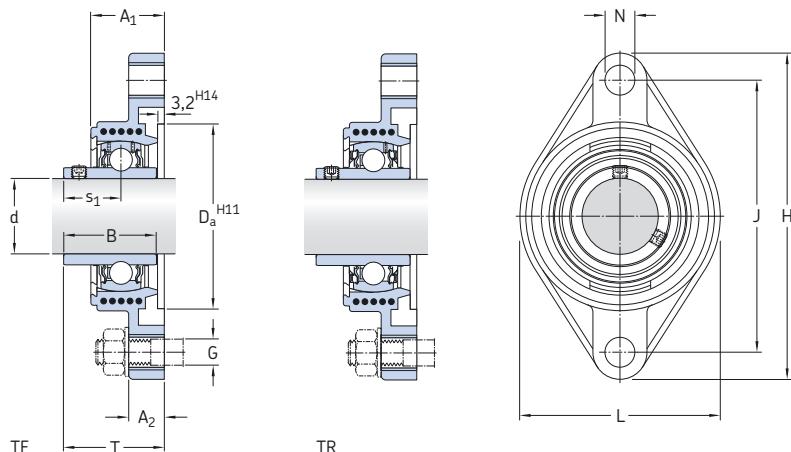


Dimensions	d	A ₁	A ₂	B	D _a	H	J	L	N	G	s ₁	T	Basic load ratings		Fatigue load limit P _u	Limiting speed with shaft tolerance h ₆	Designation Bearing unit
													C	C ₀			
	mm												kN	kN	r/min	–	
20	29,5 29,5	15 15	31 31	50,8 50,8	112 112	90 90	60,5 60,5	12 12	10 10	18,3 18,3	37,3 37,3	12,7 12,7	6,55 6,55	0,28 0,28	8 500 5 000	FYTBK 20 TF FYTBK 20 TR	
25	30 30	15 15	34,1 34,1	63,5 63,5	124 124	99 99	70 70	12 12	10 10	19,8 19,8	38,8 38,8	14 14	7,8 7,8	0,335 0,335	7 000 4 300	FYTBK 25 TF FYTBK 25 TR	
30	33 33	15 15	38,1 38,1	76,2 76,2	142,5 142,5	116,5 116,5	83 83	12 12	10 10	22,2 22,2	42,2 42,2	19,5 19,5	11,2 11,2	0,475 0,475	6 300 3 800	FYTBK 30 TF FYTBK 30 TR	
35	35 35	17 17	42,9 42,9	88,9 88,9	156 156	130 130	96 96	14,5 14,5	12 12	25,4 25,4	46,4 46,4	25,5 25,5	15,3 15,3	0,655 0,655	5 300 3 200	FYTBK 35 TF FYTBK 35 TR	




Designations Bearing unit		Separate components	Mass Bearing unit	Appropriate end cover	
		Housing	Bearing	Designation	Dimension
FYTBK 20 TF	FYTBK 504	YAR 204-2F	0,24	ECY 204	18,5
FYTBK 20 TR	FYTBK 504	YAR 204-2RF	0,24	ECY 204	18,5
FYTBK 25 TF	FYTBK 505	YAR 205-2F	0,29	ECY 205	18
FYTBK 25 TR	FYTBK 505	YAR 205-2RF	0,29	ECY 205	18
FYTBK 30 TF	FYTBK 506	YAR 206-2F	0,44	ECY 206	20
FYTBK 30 TR	FYTBK 506	YAR 206-2RF	0,44	ECY 206	20
FYTBK 35 TF	FYTBK 507	YAR 207-2F	0,61	ECY 207	22
FYTBK 35 TR	FYTBK 507	YAR 207-2RF	0,61	ECY 207	22

Flanged Y-bearing units with a cast housing with a square flange and grub screws, metric shafts

d 12 – 60 mm

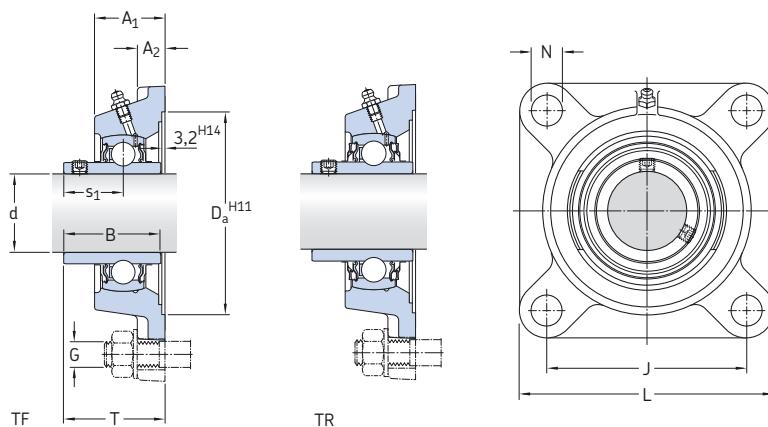


Dimensions												Basic load ratings	Fatigue load limit	Limiting speed with shaft tolerance h6	Designation Bearing unit
d	A ₁	A ₂	B	D _a	J	L	N	G	s ₁	T	C	C ₀	P _u	r/min	–
mm												kN	kN	r/min	–
12	26	11	27,4	55,6	54	76	11,5	10	15,9	32,9	9,56	4,75	0,2	9 500	FY 12 TF
15	26	11	27,4	55,6	54	76	11,5	10	15,9	32,9	9,56	4,75	0,2	9 500	FY 15 TF
17	26	11	27,4	55,6	54	76	11,5	10	15,9	32,9	9,56	4,75	0,2	9 500	FY 17 TF
20	29,5	11	31	68,3	63,5	86	11,5	10	18,3	37,3	12,7	6,55	0,28	8 500	FY 20 TF
	25,5	12	31	68,3	64	86	12	10	18,3	33,3	12,7	6,55	0,28	8 500	FYJ 20 TF
	29,5	11	31	68,3	63,5	86	11,5	10	18,3	37,3	12,7	6,55	0,28	5 000	FY 20 TR
25	30	12	34,1	74,6	70	95	11,5	10	19,8	38,8	14	7,8	0,335	7 000	FY 25 TF
	27	14	34,1	74,6	70	95	12	10	19,8	35,8	14	7,8	0,335	7 000	FYJ 25 TF
	30	12	34,1	74,6	70	95	11,5	10	19,8	38,8	14	7,8	0,335	4 300	FY 25 TR
30	32,5	13	38,1	93,7	82,5	108	11,5	10	22,2	42,2	19,5	11,2	0,475	6 300	FY 30 TF
	31	14	38,1	93,7	83	108	12	10	22,2	40,2	19,5	11,2	0,475	6 300	FYJ 30 TF
	32,5	13	38,1	93,7	82,5	108	11,5	10	22,2	42,2	19,5	11,2	0,475	3 800	FY 30 TR
35	34,5	13	42,9	106,4	92	118	14	12	25,4	46,4	25,5	15,3	0,655	5 300	FY 35 TF
	34	16	42,9	106,4	92	118	14	12	25,4	44,4	25,5	15,3	0,655	5 300	FYJ 35 TF
	34,5	13	42,9	106,4	92	118	14	12	25,4	46,4	25,5	15,3	0,655	3 200	FY 35 TR
40	38,5	14	49,2	115,9	101,5	130	14	12	30,2	54,2	30,7	19	0,8	4 800	FY 40 TF
	36	16	49,2	115,9	102	130	16	14	30,2	51,2	30,7	19	0,8	4 800	FYJ 40 TF
	38,5	14	49,2	115,9	101,5	130	14	12	30,2	54,2	30,7	19	0,8	2 800	FY 40 TR
45	39	14	49,2	119,1	105	137	16	14	30,2	54,2	33,2	21,6	0,915	4 300	FY 45 TF
	38	18	49,2	119,1	105	137	16	14	30,2	52,2	33,2	21,6	0,915	4 300	FYJ 45 TF
	39	14	49,2	119,1	105	137	16	14	30,2	54,2	33,2	21,6	0,915	2 400	FY 45 TR
50	43	15	51,6	125,4	111	143	18	16	32,6	60,6	35,1	23,2	0,98	4 000	FY 50 TF
	40	18	51,6	125,4	111	143	16	14	32,6	54,6	35,1	23,2	0,98	4 000	FYJ 50 TF
	43	15	51,6	125,4	111	143	18	16	32,6	60,6	35,1	23,2	0,98	2 200	FY 50 TR
55	47,5	16	55,6	150,8	130	162	18	16	33,4	64,4	43,6	29	1,25	3 600	FY 55 TF
	43	20	55,6	150,8	130	162	19	16	33,4	58,4	43,6	29	1,25	3 600	FYJ 55 TF
	47,5	16	55,6	150,8	130	162	18	16	33,4	64,4	43,6	29	1,25	1 900	FY 55 TR
60	52	17	65,1	161,9	143	175	18	16	39,7	73,7	52,7	36	1,53	3 400	FY 60 TF
	48	20	65,1	161,9	143	175	19	16	39,7	68,7	52,7	36	1,53	3 400	FYJ 60 TF
	52	17	65,1	161,9	143	175	18	16	39,7	73,7	52,7	36	1,53	1 800	FY 60 TR




Designations Bearing unit			Mass Bearing unit	Appropriate end cover	
	Separate components	Housing		Designation	Dimension
–	–	–	kg	–	mm
FY 12 TF	FY 503 M	YAR 203/12-2F	0,47	–	–
FY 15 TF	FY 503 M	YAR 203/15-2F	0,45	–	–
FY 17 TF	FY 503 M	YAR 203-2F	0,44	–	–
FY 20 TF	FY 504 M	YAR 204-2F	0,60	ECY 204	18,5
FYJ 20 TF	FY 504	YAR 204-2F	0,65	–	–
FY 20 TR	FY 504 M	YAR 204-2RF	0,60	ECY 204	18,5
FY 25 TF	FY 505 M	YAR 205-2F	0,77	ECY 205	18
FYJ 25 TF	FY 505	YAR 205-2F	0,86	–	–
FY 25 TR	FY 505 M	YAR 205-2RF	0,77	ECY 205	18
FY 30 TF	FY 506 M	YAR 206-2F	1,10	ECY 206	20
FYJ 30 TF	FY 506	YAR 206-2F	1,20	–	–
FY 30 TR	FY 506 M	YAR 206-2RF	1,10	ECY 206	20
FY 35 TF	FY 507 M	YAR 207-2F	1,40	ECY 207	22
FYJ 35 TF	FY 507	YAR 207-2F	1,50	–	–
FY 35 TR	FY 507 M	YAR 207-2RF	1,40	ECY 207	22
FY 40 TF	FY 508 M	YAR 208-2F	1,90	ECY 208	23,5
FYJ 40 TF	FY 508	YAR 208-2F	1,80	–	–
FY 40 TR	FY 508 M	YAR 208-2RF	1,90	ECY 208	23,5
FY 45 TF	FY 509 M	YAR 209-2F	2,10	ECY 209	23
FYJ 45 TF	FY 509	YAR 209-2F	2,45	–	–
FY 45 TR	FY 509 M	YAR 209-2RF	2,10	ECY 209	23
FY 50 TF	FY 510 M	YAR 210-2F	2,50	ECY 210	29,5
FYJ 50 TF	FY 510	YAR 210-2F	3,15	–	–
FY 50 TR	FY 510 M	YAR 210-2RF	2,50	ECY 210	29,5
FY 55 TF	FY 511 M	YAR 211-2F	3,60	ECY 211	34
FYJ 55 TF	FY 511	YAR 211-2F	3,45	–	–
FY 55 TR	FY 511 M	YAR 211-2RF	3,60	ECY 211	34
FY 60 TF	FY 512 M	YAR 212-2F	4,60	ECY 212	35,5
FYJ 60 TF	FY 512	YAR 212-2F	4,50	–	–
FY 60 TR	FY 512 M	YAR 212-2RF	4,60	ECY 212	35,5

**Flanged Y-bearing units with a cast housing with a square flange and grub screws,
metric shafts**
d 65 – 100 mm

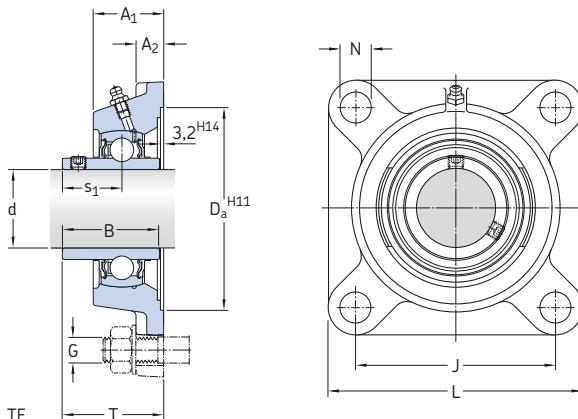


Dimensions												Basic load ratings	Fatigue load limit	Limiting speed with shaft tolerance h6	Designation Bearing unit
d	A ₁	A ₂	B	D _a	J	L	N	G	s ₁	T	C dynamic	C ₀ static	P _u	r/min	–
mm												kN	kN	r/min	–
65	52,5 50	17 20	68,3 68,3	161,9 161,9	149,5 149	187 187	18 19	16 16	42,9 42,9	76,9 72,9	57,2 57,2	40 40	1,7 1,7	3 000 3 000	FY 65 TF FYJ 65 TF
70	50,3	21,3	69,9	161,9	152	193	19	16	39,7	70,7	62,4	44	1,86	2 800	FYJ 70 TF
75	53,6	22,1	73,1	179,4	159	200	19	16	46,1	80,1	66,3	49	2,04	2 600	FYJ 75 TF
80	54,5	22	77,9	179,4	165	208	23	20	47,7	81,7	72,8	53	2,16	2 400	FYJ 80 TF
90	63,4	23,4	89	193,7	187	235	23	20	54	94	95,6	72	2,7	2 000	FYJ 90 TF
100	70	25	98,4	215,9	210	265	27	24	63,4	107,5	124	93	3,35	1 900	FYJ 100 TF



Designations Bearing unit			Mass Bearing unit	Appropriate end cover	
	Separate components	Housing		Designation	Dimension
FY 65 TF	FY 513 M	YAR 213-2F	5,30	ECY 213	35,5
FYJ 65 TF	FYJ 513	YAR 213-2F	5,80	–	–
FYJ 70 TF	FYJ 514	YAR 214-2F	6,00	–	–
FYJ 75 TF	FYJ 515	YAR 215-2F	6,80	–	–
FYJ 80 TF	FYJ 516	YAR 216-2F	7,60	–	–
FYJ 90 TF	FYJ 518	YAR 218-2F	11,5	–	–
FYJ 100 TF	FYJ 520	YAR 220-2F	15,2	–	–

**Flanged Y-bearing units with a cast housing with a square flange and grub screws,
inch shafts**

d 1/2 – 1 1/4 in

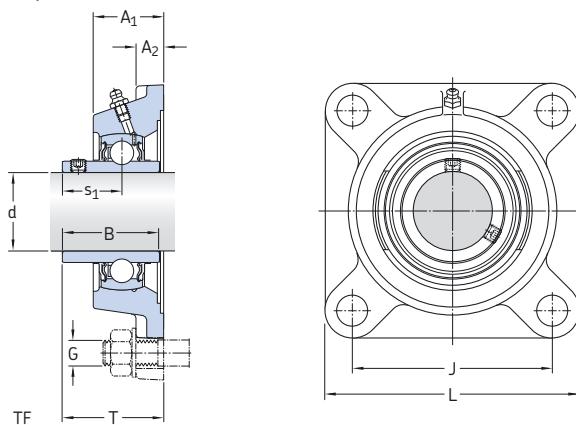

Dimensions


Designation
Bearing unit

d	A ₁	A ₂	B	J	L	G	s ₁	T	Designation
in/mm									
1/2 12,7	0.92 23,4	0.39 9,9	1.08 27,4	2.13 54	3.00 76,2	3/8 10	0.63 15,9	1.20 30,6	FY 1/2 TF
5/8 15,875	0.92 23,4	0.39 9,9	1.08 27,4	2.13 54	3.00 76,2	3/8 10	0.63 15,9	1.20 30,6	FY 5/8 TF
3/4 19,05	1.16 29,5	0.43 11	1.22 31	2.50 63,5	3.39 86	3/8 10	0.72 18,3	1.47 37,3	FY 3/4 TF
	1.00 25,5	0.47 12	1.22 31	2.52 64	3.39 86	3/8 10	0.72 18,3	1.31 33,3	FYJ 3/4 TF
13/16 20,638	1.18 30	0.47 12	1.34 34,1	2.76 70	3.74 95	7/16 10	0.78 19,8	1.53 38,8	FY 13/16 TF
7/8 22,225	1.18 30	0.47 12	1.34 34,1	2.76 70	3.74 95	7/16 10	0.78 19,8	1.53 38,8	FY 7/8 TF
15/16 23,813	1.18 30	0.47 12	1.34 34,1	2.76 70	3.74 95	7/16 10	0.78 19,8	1.53 38,8	FY 15/16 TF
1 25,4	1.18 30	0.47 12	1.34 34,1	2.76 70	3.74 95	3/8 10	0.78 19,8	1.53 38,8	FY 1. TF
	1.06 27	0.55 14	1.34 34,1	2.76 70	3.74 95	3/8 10	0.78 19,8	1.41 35,8	FYJ 1. TF
1 1/16 26,9875	1.28 32,5	0.51 13	1.50 38,1	3.25 82,5	4.25 108	7/16 10	0.87 22,2	1.66 42,2	FY 1.1/16 TF
1 1/8 28,575	1.28 32,5	0.51 13	1.50 38,1	3.25 82,5	4.25 108	7/16 10	0.87 22,2	1.66 42,2	FY 1.1/8 TF
1 3/16 30,163	1.28 32,5	0.51 13	1.50 38,1	3.25 82,5	4.25 108	7/16 10	0.87 22,2	1.66 42,2	FY 1.3/16 TF
1 1/4 31,75	1.36 34,5	0.51 13	1.69 42,9	3.62 92	4.65 118	1/2 12	1.00 25,4	1.83 46,4	FY 1.1/4 TF
	1.34 34	0.51 16	1.69 42,9	3.62 92	4.65 118	1/2 12	1.00 25,4	1.75 44,4	FYJ 1.1/4 TF

Designations Bearing unit	Separate components		Basic load ratings		Fatigue load limit P_u	Limiting speed with shaft tolerance h6	Mass Bearing unit
	Housing	Bearing	dynamic C	static C_0			
–			lbf/kN		lbf/kN	r/min	lb/kg
FY 1/2 TF	FY 503 U	YAR 203-008-2F	2 150 9,56	1 070 4,75	50 0,2	9 500	1,00 0,46
FY 5/8 TF	FY 503 U	YAR 203-010-2F	2 150 9,56	1 070 4,75	50 0,2	9 500	1,05 0,95
FY 3/4 TF	FY 504 M	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	8 500	1,35 0,61
FYJ 3/4 TF	FYJ 504	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	8 500	1,45 0,66
FY 13/16 TF	FY 505 U	YAR 205-013-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,80 0,81
FY 7/8 TF	FY 505 U	YAR 205-014-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,75 0,80
FY 15/16 TF	FY 505 U	YAR 205-015-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,70 0,78
FY 1.TF	FY 505 M	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,70 0,77
FYJ 1.TF	FYJ 505	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,90 0,86
FY 1.1/16 TF	FY 506 U	YAR 206-101-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2,45 1,10
FY 1.1/8 TF	FY 506 U	YAR 206-102-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2,50 1,10
FY 1.3/16 TF	FY 506 U	YAR 206-103-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2,40 1,10
FY 1.1/4 TF	FY 507 M	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,20 1,45
FYJ 1.1/4 TF	FYJ 507	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,40 1,55

Flanged Y-bearing units with a cast housing with a square flange and grub screws, inch shafts

d 1 5/16 – 1 15/16 in

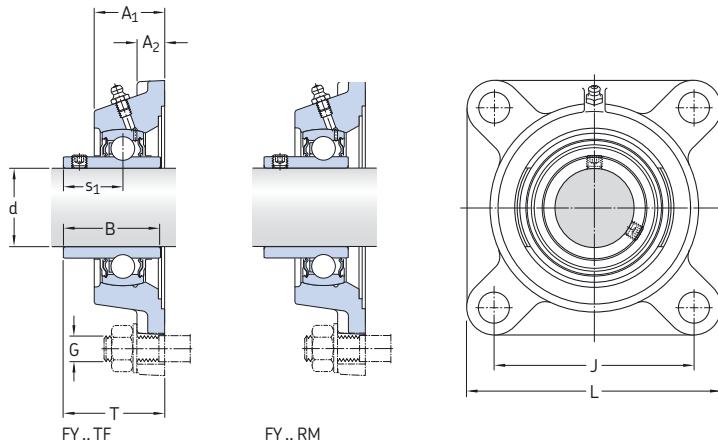

Dimensions


Designation
Bearing unit

d	A ₁	A ₂	B	J	L	G	s ₁	T	
in/mm									
1 5/16 33,338	1.36 34,5	0.51 13	1.69 42,9	3.62 92	4.65 118	1/2 12	1.00 25,4	1.83 46,4	FY 1.5/16 TF
1 3/8 34,925	1.36 34,5	0.51 13	1.69 42,9	3.62 92	4.65 118	1/2 12	1.00 25,4	1.83 46,4	FY 1.3/8 TF
1 7/16 36,513	1.36 34,5	0.51 13	1.69 42,9	3.62 92	4.65 118	1/2 12	1.00 25,4	1.83 46,4	FY 1.7/16 TF
	1.52 38,5	0.55 14	1.94 49,2	4.00 101,5	5.12 130	1/2 12	1.19 30,2	2.13 54,2	FYM 1.7/16 TF
	1.42 36	0.63 16	1.94 49,2	4.02 102	5.12 130	9/16 14	1.19 30,2	2.02 51,2	FYJ 1.1/2 TF
	1.54 39	0.55 14	1.94 49,2	4.13 105	5.39 137	9/16 14	1.19 30,2	2.13 54,2	FYM 1.1/2 TF
1 1/2 38,1	1.52 38,5	0.55 14	1.94 49,2	4.00 101,5	5.12 130	1/2 12	1.19 30,2	2.13 54,2	FY 1.1/2 TF
	1.42 36	0.63 16	1.94 49,2	4.02 102	5.12 130	9/16 14	1.19 30,2	2.02 51,2	FYJ 1.1/2 TF
	1.54 39	0.55 14	1.94 49,2	4.13 105	5.39 137	9/16 14	1.19 30,2	2.13 54,2	FYM 1.1/2 TF
1 5/8 41,275	1.54 39	0.55 14	1.94 49,2	4.13 105	5.39 137	9/16 14	1.19 30,2	2.13 54,2	FY 1.5/8 TF
1 11/16 42,863	1.69 43	0.59 15	2.03 51,6	4.37 111	5.63 143	9/16 14	1.28 32,6	2.39 60,6	FYM 1.11/16 TF
1 3/4 44,445	1.54 39	0.55 14	1.94 49,2	4.13 105	5.39 137	9/16 14	1.19 30,2	2.13 54,2	FY 1.3/4 TF
	1.54 39	0.55 14	1.63 41,5	4.13 105	5.39 137	9/16 14	1.20 30,5	2.13 54,2	FY 1.3/4 RM
	1.50 38	0.71 18	1.94 49,2	4.13 105	5.39 137	9/16 14	1.19 30,2	2.06 52,2	FYJ 1.3/4 TF
	1.69 43	0.59 15	2.03 51,6	4.37 111	5.63 143	9/16 14	1.28 32,6	2.39 60,6	FYM 1.3/4 TF
1 15/16 49,213	1.69 43	0.59 15	2.03 51,6	4.37 111	5.63 143	9/16 14	1.28 32,6	2.39 60,6	FY 1.15/16 TF
	1.87 47,5	0.63 16	2.19 55,6	5.12 130	6.38 162	5/8 16	1.31 33,4	2.54 64,4	FYM 1.15/16 TF

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings dynamic C		Fatigue load limit P _u	Limiting speed with shaft tolerance h ₆	Mass Bearing unit
–			lbf/kN		lbf/kN	r/min	lb/kg
FY 1.5/16 TF	FY 507 U	YAR 207-105-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,20 1,45
FY 1.3/8 TF	FY 507 U	YAR 207-106-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,15 1,40
FY 1.7/16 TF	FY 507 U	YAR 207-107-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,05 1,40
FYM 1.7/16 TF	FY 508 U	YAR 208-107-2F	6 910 30,7	4 280 19	180 0,8	4 800	4,50 2,00
FY 1.1/2 TF	FY 508 M	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	4 800	4,20 1,90
FYJ 1.1/2 TF	FYJ 508	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	4 800	4,30 1,95
FYM 1.1/2 TF	FY 509 U	YAR 209-108-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	5,50 2,50
FY 1.5/8 TF	FY 509 U	YAR 209-110-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	4,40 2,20
FYM 1.11/16 TF	FY 510 U	YAR 210-111-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	5,50 2,50
FY 1.3/4 TF	FY 509 M	YAR 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	4,75 2,15
FY 1.3/4 RM	FY 509 U	YAT 209-112	7 470 33,2	4 860 21,6	210 0,915	4 300	4,40 2,00
FYJ 1.3/4 TF	FYJ 509	YAR 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	5,50 2,50
FYM 1.3/4 TF	FY 510 U	YAR 210-112-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	5,50 2,50
FY 1.15/16 TF	FY 510 U	YAR 210-115-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	5,25 2,50
FYM 1.15/16 TF	FY 511 U	YAR 211-115-2F	9 810 43,6	6 530 29	280 1,25	3 600	9,00 4,00

**Flanged Y-bearing units with a cast housing with a square flange and grub screws,
inch shafts**

d 2 – 3 in

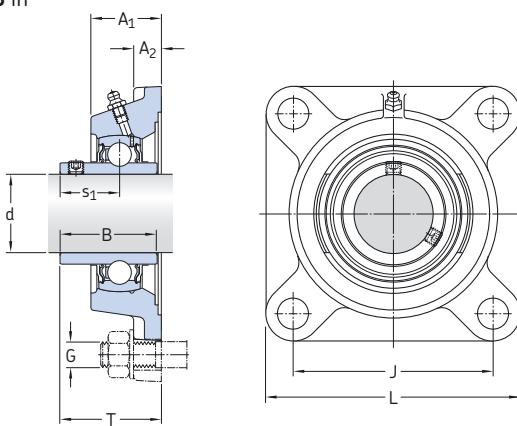


Dimensions

Designation
Bearing unit


d	A ₁	A ₂	B	J	L	G	s ₁	T	Designation
in/mm									
2 50,8	1.87 47,5	0.63 16	2.19 55,6	5.12 130	6.38 162	5/8 16	1.31 33,4	2.54 64,4	FY 2.TF
	1.69 43	0.79 20	2.19 55,6	5.12 130	6.38 162	5/8 16	1.31 33,4	2.30 58,4	FYJ 2.TF
2 3/16 55,563	1.87 47,5	0.63 16	2.19 55,6	5.12 130	6.38 162	5/8 16	1.31 33,4	2.54 64,4	FY 2.3/16 TF
	2.05 52	0.67 17	2.56 65,1	5.63 143	6.89 175	5/8 16	1.56 39,7	2.90 73,7	FYM 2.3/16 TF
2 1/4 57,15	2.05 52	0.67 17	2.56 65,1	5.63 143	6.89 175	5/8 16	1.56 39,7	2.90 73,7	FY 2.1/4 TF
2 7/16 61,913	2.05 52	0.67 17	2.56 65,1	5.63 143	6.89 175	5/8 16	1.56 39,7	2.90 73,7	FY 2.7/16 TF
	2.25 57,15	0.69 17,5	2.75 69,6	5.88 149,3	7.37 187,5	5/8 16	1.56 39,7	3.00 76,2	FYM 2.7/16 TF
2 1/2 63,5	2.07 52,5	0.67 17	2.69 68,3	5.89 149,5	7.36 187	5/8 16	1.69 42,9	3.03 76,9	FY 2.1/2 TF
	1.97 50	0.78 20	2.69 68,3	5.87 149	7.36 187	5/8 16	1.69 42,9	2.87 72,9	FYJ 2.1/2 TF
2 11/16 68,263	2.07 52,5	0.65 16,5	2.69 68,3	5.89 149,5	7.36 187	5/8 16	1.69 42,9	2.85 72,4	FY 2.11/16 TF
2 3/4 69,85	2.56 65,1	0.75 19	2.88 73,1	6.00 152,4	7.75 197	3/4 20	1.82 46,1	3.44 87,4	FY 2.3/4 TF
2 15/16 74,613	2.56 65,1	0.75 19	2.88 73,1	6.00 152,4	7.75 197	3/4 20	1.82 46,1	3.44 87,4	FY 2.15/16 TF
	2.31 58,7	0.87 22,2	3.07 77,9	6.00 152,4	7.75 197	3/4 20	1.88 47,7	3.25 82,6	FYM 2.15/16 TF
3 76,2	2.31 58,7	0.87 22,2	3.07 77,9	6.00 152,4	7.75 197	3/4 20	1.88 47,7	3.25 82,6	FYM 3.TF

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings dynamic C		Fatigue load limit P _u	Limiting speed with shaft tolerance h ₆	Mass Bearing unit
-			lbf/kN		lbf/kN	r/min	lb/kg
FY 2. TF	FY 511 M	YAR 211-200-2F	9 810 43,6	6 530 29	280 1,25	3 600	8.25 3,75
FYJ 2. TF	FYJ 511	YAR 211-200-2F	9 810 43,6	6 530 29	280 1,25	3 600	7,95 3,60
FY 2.3/16 TF	FY 511 U	YAR 211-203-2F	9 810 43,6	6 530 29	280 1,25	3 600	7,85 3,55
FYM 2.3/16 TF	FY 512 U	YAR 212-203-2F	11 860 52,7	8 100 36	340 1,53	3 400	11,0 5,00
FY 2.1/4 TF	FY 512 U	YAR 212-204-2F	11 860 52,7	8 100 36	340 1,53	3 400	10,5 4,75
FY 2.7/16 TF	FY 512 U	YAR 212-207-2F	11 860 52,7	8 100 36	340 1,53	3 400	10,0 4,60
FYM 2.7/16 TF	FY 514 U	YAR 214-207-2F	14 040 62,4	9 900 44	420 1,86	2 800	13,0 6,0
FY 2.1/2 TF	FY 513 M	YAR 213-208-2F	12 870 57,2	9 000 40	380 1,7	3 000	11,9 5,40
FYJ 2.1/2 TF	FYJ 513	YAR 213-208-2F	12 870 57,2	9 000 40	380 1,7	3 000	13,0 5,90
FY 2.11/16 TF	FY 513 U	YAR 213-211-2F	12 870 57,2	9 000 40	380 1,7	3 000	11,5 5,10
FY 2.3/4 TF	FY 515 U	YAR 215-212-2F	14 920 66,3	11 030 49	460 2,04	2 600	13,5 6,10
FY 2.15/16 TF	FY 515 U	YAR 215-215-2F	14 920 66,3	11 030 49	460 2,04	2 600	18,0 8,15
FYM 2.15/16 TF	FY 516 U	YAR 216-215-2F	16 380 72,8	11 930 53	490 2,16	2 400	17,5 8,00
FYM 3. TF	FY 516 U	YAR 216-300-2F	16 380 72,8	11 930 53	490 2,16	2 400	17,5 8,00

Flanged Y-bearing units with a cast housing with a square flange and an eccentric locking collar, metric shafts
d 15 – 60 mm

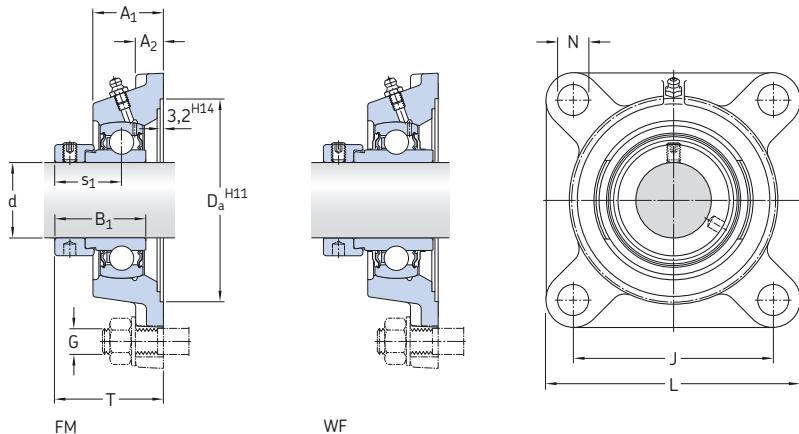


Dimensions												Basic load ratings dynamic C	Fatigue load limit C ₀	Limiting speed with shaft tolerance h6 r/min	Designation Bearing unit
d	A ₁	A ₂	B ₁	D _a	J	L	N	G	s ₁	T					
mm												kN	kN	r/min	–
15	26	11	28,6	55,6	54	76	11,5	10	22,1	39,1	9,56	4,75	0,2	9 500	FY 15 FM
17	26	11	28,6	55,6	54	76	11,5	10	22,1	39,1	9,56	4,75	0,2	9 500	FY 17 FM
20	29,5	11	31	68,3	63,5	86	11,5	10	23,5	42,5	12,7	6,55	0,28	8 500	FY 20 FM
	29,5	11	43,7	68,3	63,5	86	11,5	10	26,6	45,6	12,7	6,55	0,28	8 500	FY 20 WF
25	30	12	31	74,6	70	95	11,5	10	23,5	42,5	14	7,8	0,335	7 000	FY 25 FM
	30	12	44,4	74,6	70	95	11,5	10	26,9	45,6	14	7,8	0,335	7 000	FY 25 WF
30	32,5	13	35,7	93,7	82,5	108	11,5	10	26,7	46,7	19,5	11,2	0,475	6 300	FY 30 FM
	32,5	13	48,4	93,7	82,5	108	11,5	10	30,1	50,1	19,5	11,2	0,475	6 300	FY 30 WF
35	34,5	13	38,9	106,4	92	118	14	12	29,4	50,4	25,5	15,3	0,655	5 300	FY 35 FM
	34,5	13	51,1	106,4	92	118	14	12	32,3	53,3	25,5	15,3	0,655	5 300	FY 35 WF
40	38,5	14	43,7	115,9	101,5	130	14	12	32,7	56,7	30,7	19	0,8	4 800	FY 40 FM
	38,5	14	56,3	115,9	101,5	130	14	12	34,9	58,9	30,7	19	0,8	4 800	FY 40 WF
45	39	14	43,7	119,1	105	137	16	14	32,7	56,7	33,2	21,6	0,915	4 300	FY 45 FM
	39	14	56,3	119,1	105	137	16	14	34,9	58,9	33,2	21,6	0,915	4 300	FY 45 WF
50	43	15	43,7	125,4	111	143	18	16	32,7	60,7	35,1	23,2	0,98	4 000	FY 50 FM
	43	15	62,7	125,4	111	143	18	16	38,1	66,1	35,1	23,2	0,98	4 000	FY 50 WF
55	47,5	16	48,4	150,8	130	162	18	16	36,4	67,4	43,6	29	1,25	3 600	FY 55 FM
	47,5	16	71,4	150,8	130	162	18	16	43,6	74,6	43,6	29	1,25	3 600	FY 55 WF
60	52	17	53,1	161,9	143	175	18	16	39,6	73,6	52,7	36	1,53	3 400	FY 60 FM
	52	17	77,8	161,9	143	175	18	16	46,8	80,8	52,7	36	1,53	3 400	FY 60 WF



Designations Bearing unit			Mass Bearing unit	Appropriate end cover	
	Separate components	Housing Bearing		Designation	Dimension
–	–	–	kg	–	mm
FY 15 FM	FY 503 M	YET 203/15	0,47	–	–
FY 17 FM	FY 503 M	YET 203	0,48	–	–
FY 20 FM	FY 504 M	YET 204	0,62	ECY 204	18,5
FY 20 WF	FY 504 M	YEL 204-2F	0,65	ECY 204	18,5
FY 25 FM	FY 505 M	YET 205	0,78	ECY 205	18
FY 25 WF	FY 505 M	YEL 205-2F	0,83	ECY 205	18
FY 30 FM	FY 506 M	YET 206	1,10	ECY 206	20
FY 30 WF	FY 506 M	YEL 206-2F	1,20	ECY 206	20
FY 35 FM	FY 507 M	YET 207	1,50	ECY 207	22
FY 35 WF	FY 507 M	YEL 207-2F	1,55	ECY 207	22
FY 40 FM	FY 508 M	YET 208	1,95	ECY 208	23,5
FY 40 WF	FY 508 M	YEL 208-2F	2,05	ECY 208	23,5
FY 45 FM	FY 509 M	YET 209	2,15	ECY 209	23
FY 45 WF	FY 509 M	YEL 209-2F	2,25	ECY 209	23
FY 50 FM	FY 510 M	YET 210	2,55	ECY 210	29,5
FY 50 WF	FY 510 M	YEL 210-2F	2,70	ECY 210	29,5
FY 55 FM	FY 511 M	YET 211	3,60	ECY 211	34
FY 55 WF	FY 511 M	YEL 211-2F	3,85	ECY 211	34
FY 60 FM	FY 512 M	YET 212	4,70	ECY 212	35,5
FY 60 WF	FY 512 M	YEL 212-2F	5,00	ECY 212	35,5

**Flanged Y-bearing units with a cast housing with a square flange and an eccentric locking collar, inch shafts
d 5/8 – 1 3/4 in**

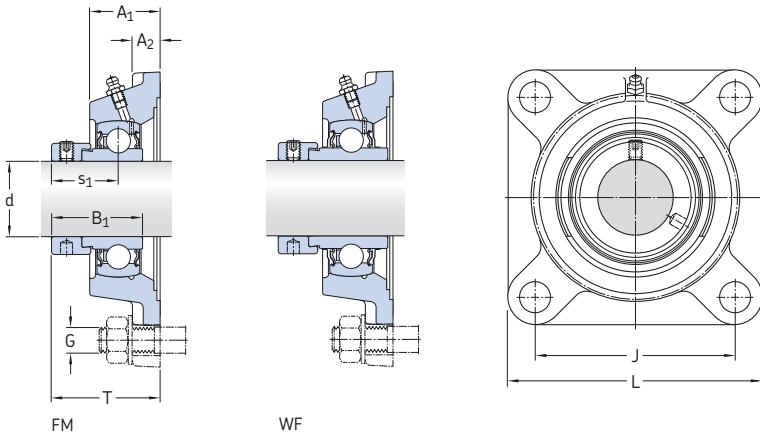

Dimensions Designation
Bearing unit


d	A ₁	A ₂	B ₁	J	L	G	s ₁	T	Designation Bearing unit
---	----------------	----------------	----------------	---	---	---	----------------	---	-----------------------------

in/mm –

5/8 15,875	0.92 23,4	0.39 9,9	1.13 28,6	2.13 54	3.00 76,2	3/8 10	0.87 22,1	1.45 36,8	FY 5/8 FM
3/4 19,05	1.16 29,5	0.43 11	1.22 31	2.50 63,5	3.39 86	3/8 10	0.93 23,5	1.68 42,5	FY 3/4 FM
7/8 22,225	1.18 30	0.47 12	1.22 31	2.76 70	3.74 95	7/16 10	0.93 23,5	1.67 42,5	FY 7/8 FM
1 25,4	1.18 30	0.47 12	1.22 31	2.76 70	3.74 95	7/16 10	0.93 23,5	1.67 42,5	FY 1. FM
	1.18 30	0.47 12	1.75 44,4	2.76 70	3.74 95	7/16 10	1.06 26,9	1.81 45,9	FY 1. WF
1 1/8 28,575	1.28 32,5	0.51 13	1.41 35,7	3.25 82,5	4.25 108	7/16 10	1.05 26,7	1.84 46,7	FY 1.1/8 FM
1 3/16 30,163	1.28 32,5	0.51 13	1.41 35,7	3.25 82,5	4.25 108	7/16 10	1.05 26,7	1.84 46,7	FY 1.3/16 FM
1 1/4 31,75	1.36 34,5	0.51 13	1.53 38,9	3.62 92	4.65 118	1/2 12	1.16 29,4	1.98 50,4	FY 1.1/4 FM
	1.36 34,5	0.51 13	2.01 51,1	3.62 92	4.65 118	1/2 12	1.27 32,3	2.10 53,3	FY 1.1/4 WF
1 3/8 34,925	1.36 34,5	0.51 13	1.53 38,9	3.62 92	4.65 118	1/2 12	1.16 29,4	1.98 50,4	FY 1.3/8 FM
1 7/16 36,513	1.36 34,5	0.51 13	1.53 38,9	3.62 92	4.65 118	1/2 12	1.16 29,4	1.98 50,4	FY 1.7/16 FM
1 1/2 38,1	1.52 38,5	0.55 14	1.72 43,7	4.00 101,5	5.12 130	1/2 12	1.29 32,7	2.22 56,5	FY 1.1/2 FM
	1.52 38,5	0.55 14	2.22 56,3	4.00 101,5	5.12 130	1/2 12	1.37 34,9	2.32 58,9	FY 1.1/2 WF
1 11/16 42,863	1.54 39	0.55 14	1.72 43,7	4.13 105	5.39 137	9/16 14	1.29 32,7	2.22 56,5	FY 1.11/16 FM
1 3/4 44,45	1.54 39	0.55 14	1.72 43,7	4.13 105	5.39 137	9/16 14	1.29 32,7	2.22 56,5	FY 1.3/4 FM

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings dynamic <i>C</i>		Fatigue load limit <i>P_u</i>	Limiting speed with shaft tolerance <i>h₆</i>	Mass Bearing unit
–			lbf/kN		lbf/kN	r/min	lb/kg
FY 5/8 FM	FY 503 U	YET 203-010	2 150 9,56	1 070 4,75	50 0,2	9 500	1,05 0,47
FY 3/4 FM	FY 504 U	YET 204-012	2 860 12,7	1 470 6,55	60 0,28	8 500	1,40 0,63
FY 7/8 FM	FY 505 U	YET 205-014	3 150 14	1 760 7,8	80 0,335	7 000	1,80 0,81
FY 1. FM	FY 505 U	YET 205-100	3 150 14	1 760 7,8	80 0,335	7 000	1,70 0,78
FY 1. WF	FY 505 U	YEL 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,80 0,82
FY 1.1/8 FM	FY 506 U	YET 206-102	4 390 19,5	2 520 11,2	110 0,475	6 300	2,50 1,10
FY 1.3/16 FM	FY 506 U	YET 206-103	4 390 19,5	2 520 11,2	110 0,475	6 300	2,45 1,10
FY 1.1/4 FM	FY 507 U	YET 207-104	5 740 25,5	3 440 15,3	150 0,655	5 300	3,40 1,55
FY 1.1/4 WF	FY 507 U	YEL 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,55 1,60
FY 1.3/8 FM	FY 507 U	YET 207-106	5 740 25,5	3 440 15,3	150 0,655	5 300	3,25 1,50
FY 1.7/16 FM	FY 507 U	YET 207-107	5 740 25,5	3 440 15,3	150 0,655	5 300	3,20 1,45
FY 1.1/2 FM	FY 508 U	YET 208-108	6 910 30,7	4 280 19	180 0,8	4 800	4,40 2,00
FY 1.1/2 WF	FY 508 U	YEL 208-108-2F	6 910 30,7	4 280 19	180 0,8	4 800	4,65 2,10
FY 1.11/16 FM	FY 509 U	YET 209-111	7 470 33,2	4 860 21,6	210 0,915	4 300	4,85 2,20
FY 1.3/4 FM	FY 509 U	YET 209-112	7 470 33,2	4 860 21,6	210 0,915	4 300	4,75 2,15

Flanged Y-bearing units with a cast housing with a square flange and an eccentric locking collar, inch shafts
d 1 15/16 – 2 7/16 in

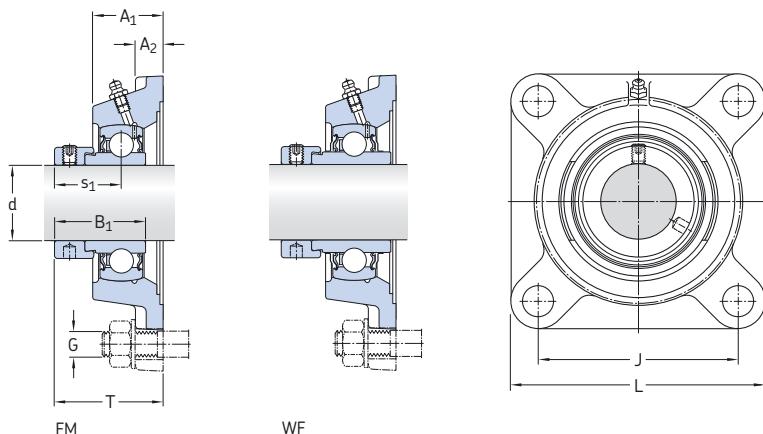


Dimensions

Designation
Bearing unit

d	A ₁	A ₂	B ₁	J	L	G	s ₁	T	Designation
in/mm									
1 15/16 49,213	1.69 43	0.59 15	1.72 43,7	4.37 111	5.63 143	9/16 14	1.29 32,7	2.39 60,7	FY 1.15/16 FM
	1.69 43	0.59 15	2.47 62,7	4.37 111	5.63 143	9/16 14	1.50 38,1	2.60 66,1	FY 1.15/16 WF
2 50,8	1.87 47,5	0.63 16	1.91 48,4	5.12 130	6.38 162	5/8 16	1.43 36,4	2.65 67,4	FY 2. FM
2 3/16 55,563	1.87 47,5	0.63 16	1.91 48,4	5.12 130	6.38 162	5/8 16	1.43 36,4	2.65 67,4	FY 2.3/16 FM
	1.87 47,5	0.63 16	2.81 71,4	5.12 130	6.38 162	5/8 16	1.72 43,6	2.94 74,6	FY 2.3/16 WF
2 7/16 61,913	2.05 52	0.67 17	3.06 77,8	5.63 143	6.89 175	5/8 16	1.84 46,8	3.18 80,8	FY 2.7/16 WF

Designations Bearing unit	Separate components		Basic load ratings		Fatigue load limit P_u	Limiting speed with shaft tolerance h_6	Mass Bearing unit
	Housing	Bearing	dynamic C	static C_0			
-			lbf/kN		lbf/kN	r/min	lb/kg
FY 1.15/16 FM	FY 510 U	YET 210-115	7 900 35,1	5 220 23,2	220 0,98	4 000	5,60 2,55
FY 1.15/16 WF	FY 510 U	YEL 210-115-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	6,05 2,75
FY 2. FM	FY 511 U	YET 211-200	9 810 43,6	6 530 29	280 1,25	3 600	8,25 3,75
FY 2.3/16 FM	FY 511 U	YET 211-203	9 810 43,6	6 530 29	280 1,25	3 600	8,00 3,65
FY 2.3/16 WF	FY 511 U	YEL 211-203-2F	9 810 43,6	6 530 29	280 1,25	3 600	8,50 3,85
FY 2.7/16 WF	FY 512 U	YEL 212-207-2F	11 860 52,7	8 100 36	340 1,53	3 400	11,0 5,05

**Flanged Y-bearing units with a cast housing with a square flange and an adapter sleeve,
metric shafts
d 20 – 60 mm**

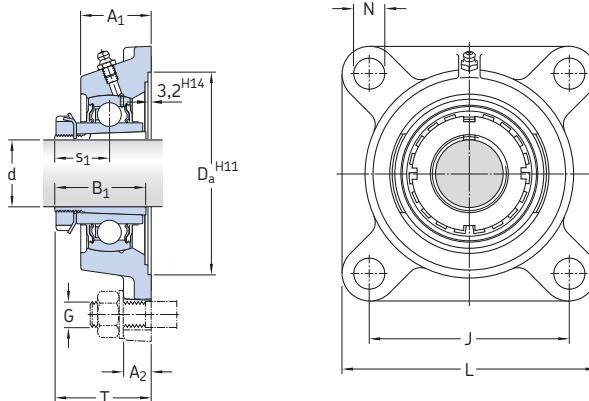


Dimensions	d	A ₁	A ₂	B ₁	D _a	J	L	N	G	s ₁	T	Basic load ratings		Fatigue load limit P _u	Designations ¹⁾	
												dynamic C	static C ₀		Bearing unit	Adapter sleeve
mm												kN	kN	–		
20	27	14	35	74,6	70	95	12	10	20	36		14	7,8	0,335	FYJ 25 KF	H 2305
25	31	14	38	93,7	83	108	12	10	22	40		19,5	11,2	0,475	FYJ 30 KF	H 2306
30	34	16	43	106,4	92	118	14	12	24,3	43,3		25,5	15,3	0,655	FYJ 35 KF	H 2307
35	36	16	46	115,9	102	130	16	14	27	48		30,7	19	0,8	FYJ 40 KF	H 2308
40	38	18	50	119,1	105	137	16	14	28,5	50,5		33,2	21,6	0,915	FYJ 45 KF	H 2309
45	40	18	55	125,4	111	143	16	14	30,5	52,5		35,1	23,2	0,98	FYJ 50 KF	H 2310
50	43	20	59	150,8	130	162	19	16	32,5	57,5		43,6	29	1,25	FYJ 55 KF	H 2311
55	48	20	62	161,9	143	175	19	16	34,3	63,3		52,7	36	1,53	FYJ 60 KF	H 2312
60	50	20	65	161,9	149	187	19	16	35,8	65,8		57,2	40	1,7	FYJ 65 KF	H 2313

¹⁾ Bearing unit and adapter sleeve to be ordered separately

Designations	Bearing unit without adapter sleeve	Separate components of the bearing unit	Limiting speed	Mass Bearing unit + sleeve
	Housing	Bearing	r/min	kg
FYJ 25 KF	FYJ 505	YSA 205-2FK	7 000	0,73
FYJ 30 KF	FYJ 506	YSA 206-2FK	6 300	1,05
FYJ 35 KF	FYJ 507	YSA 207-2FK	5 300	1,35
FYJ 40 KF	FYJ 508	YSA 208-2FK	4 800	1,75
FYJ 45 KF	FYJ 509	YSA 209-2FK	4 300	2,10
FYJ 50 KF	FYJ 510	YSA 210-2FK	4 000	2,80
FYJ 55 KF	FYJ 511	YSA 211-2FK	3 600	3,60
FYJ 60 KF	FYJ 512	YSA 212-2FK	3 400	4,60
FYJ 65 KF	FYJ 513	YSA 213-2FK	3 000	6,00

Flanged Y-bearing units with a cast housing with a square flange and an adapter sleeve, inch shafts

d $\frac{3}{4}$ – $2\frac{1}{8}$ in

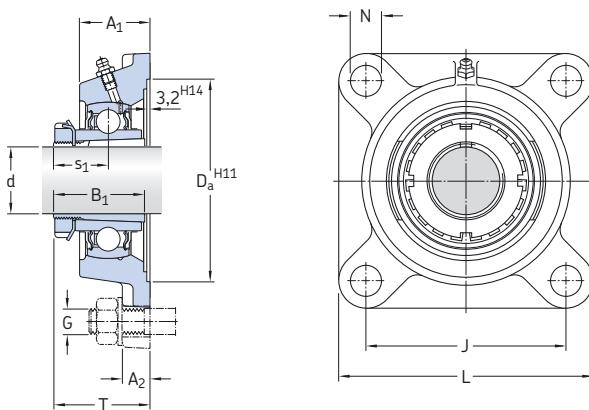

Dimensions


d	A ₁	A ₂	B ₁	D _a	J	L	N	G	s ₁	T	Designations ¹⁾	Bearing unit	Adapter sleeve
in/mm													
$\frac{3}{4}$ 19,05	1.06 27	0.55 14	1.38 35	2.94 74,6	2.76 70	3.74 95	0.47 12	$\frac{3}{8}$ 10	0.79 20	1.42 36	FYJ 25 KF	HE 2305	
$\frac{15}{16}$ 23,813	1.22 31	0.55 14	1.50 38	3.69 93,7	3.27 83	4.25 108	0.47 12	$\frac{3}{8}$ 10	0.87 22	1.57 40	FYJ 30 KF	HA 2306	
$1\frac{1}{4}$ 25,4	1.22 31	0.55 14	1.50 38	3.69 93,7	3.27 83	4.25 108	0.47 12	$\frac{3}{8}$ 10	0.87 22	1.57 40	FYJ 30 KF	HE 2306	
$1\frac{3}{16}$ 30,163	1.34 34	0.63 16	1.69 43	4.19 106,4	3.62 92	4.65 118	0.55 14	$\frac{1}{2}$ 12	0.96 24,3	1.70 43,3	FYJ 35 KF	HA 2307	
$1\frac{1}{4}$ 31,75	1.42 36	0.63 16	1.81 46	4.56 115,9	4.02 102	5.12 130	0.63 16	$\frac{9}{16}$ 14	1.06 27	1.89 48	FYJ 40 KF	HE 2308	
$1\frac{7}{16}$ 36,513	1.50 38	0.71 18	1.97 50	4.69 119,1	4.13 105	5.39 137	0.63 16	$\frac{9}{16}$ 14	1.12 28,5	1.99 50,5	FYJ 45 KF	HA 2309	
$1\frac{1}{2}$ 38,1	1.50 38	0.71 18	1.97 50	4.69 119,1	4.13 105	5.39 137	0.63 16	$\frac{9}{16}$ 14	1.12 28,5	1.99 50,5	FYJ 45 KF	HE 2309	
$1\frac{5}{8}$ 41,275	1.57 40	0.71 18	2.17 55	4.94 125,4	4.37 111	5.63 143	0.63 16	$\frac{9}{16}$ 14	1.20 30,5	2.07 52,5	FYJ 50 KF	HS 2310	
$1\frac{11}{16}$ 42,863	1.57 40	0.71 18	2.17 55	4.94 125,4	4.37 111	5.63 143	0.63 16	$\frac{9}{16}$ 14	1.20 30,5	2.07 52,5	FYJ 50 KF	HA 2310	
$1\frac{3}{4}$ 44,45	1.57 40	0.71 18	2.17 55	4.94 125,4	4.37 111	5.63 143	0.63 16	$\frac{9}{16}$ 14	1.20 30,5	2.07 52,5	FYJ 50 KF	HE 2310	
$1\frac{15}{16}$ 49,213	1.69 43	0.79 20	2.32 59	5.94 150,8	5.12 130	6.38 162	0.75 19	$\frac{5}{8}$ 16	1.28 32,5	2.26 57,5	FYJ 55 KF	HA 2311	
2 50,8	1.69 43	0.79 20	2.32 59	5.94 150,8	5.12 130	6.38 162	0.75 19	$\frac{5}{8}$ 16	1.28 32,5	2.26 57,5	FYJ 55 KF	HE 2311 B	
$2\frac{1}{8}$ 53,975	1.89 48	0.79 20	2.44 62	6.37 161,9	5.63 143	6.89 175	0.75 19	$\frac{5}{8}$ 16	1.35 34,3	2.49 63,3	FYJ 60 KF	HS 2312	

¹⁾ Bearing unit and adapter sleeve to be ordered separately

Designations Bearing unit without adapter sleeve	Separate components		Basic load ratings		Fatigue load limit	Limiting speed	Mass Bearing unit + sleeve
	Housing	Bearing	dynamic C	static C_0	P_u	r/min	lb/kg
–			lbf/kN	lbf/kN			
FYJ 25 KF	FYJ 505	YSA 205-2FK	3 150 14	1 760 7,8	80 0,335	7 000	1,60 0,73
FYJ 30 KF	FYJ 506	YSA 206-2FK	4 390 19,5	2 520 11,2	110 0,475	6 300	2,35 1,05
FYJ 30 KF	FYJ 506	YSA 206-2FK	4 390 19,5	2 520 11,2	110 0,475	6 300	2,30 1,05
FYJ 35 KF	FYJ 507	YSA 207-2FK	5 740 25,5	3 440 15,3	150 0,655	5 300	3,00 1,35
FYJ 40 KF	FYJ 508	YSA 208-2FK	6 910 30,7	4 280 19	180 0,8	4 800	3,85 1,75
FYJ 45 KF	FYJ 509	YSA 209-2FK	7 470 33,2	4 860 21,6	210 0,915	4 300	4,75 2,15
FYJ 45 KF	FYJ 509	YSA 209-2FK	7 470 33,2	4 860 21,6	210 0,915	4 300	4,65 2,10
FYJ 50 KF	FYJ 510	YSA 210-2FK	7 900 35,1	5 220 23,2	220 0,98	4 000	6,30 2,85
FYJ 50 KF	FYJ 510	YSA 210-2FK	7 900 35,1	5 220 23,2	220 0,98	4 000	6,25 2,85
FYJ 50 KF	FYJ 510	YSA 210-2FK	7 900 35,1	5 220 23,2	220 0,98	4 000	6,15 2,80
FYJ 55 KF	FYJ 511	YSA 211-2FK	9 810 43,6	6 530 29	280 1,25	3 600	7,95 3,60
FYJ 55 KF	FYJ 511	YSA 211-2FK	9 810 43,6	6 530 29	280 1,25	3 600	7,95 3,60
FYJ 60 KF	FYJ 512	YSA 212-2FK	11 860 52,7	8 100 36	340 1,53	3 400	10,0 4,60

Flanged Y-bearing units with a cast housing with a square flange and an adapter sleeve, inch shafts

d 2 $\frac{3}{16}$ – 2 $\frac{3}{8}$ in

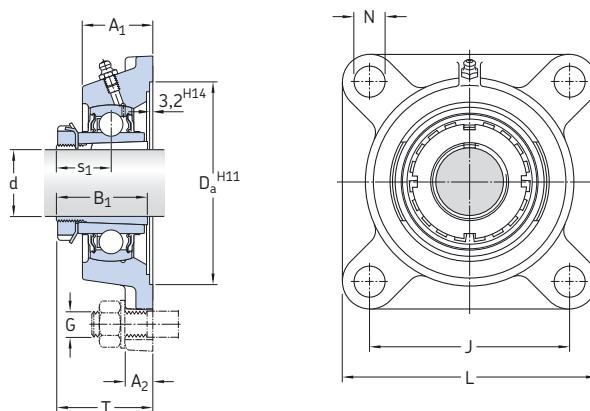

Dimensions

Designations¹⁾
Bearing unit Adapter sleeve


d	A ₁	A ₂	B ₁	D _a	J	L	N	G	s ₁	T		
in/mm												
2 $\frac{3}{16}$ 55,563	1.97 50	0.79 20	2.56 65	6.37 161,9	5.87 149	7.36 187	0.75 19	5/8 16	1.41 35,8	2.59 65,8	FYJ 65 KF	HA 2313
2 $\frac{1}{4}$ 57,15	1.97 50	0.79 20	2.56 65	6.37 161,9	5.87 149	7.36 187	0.75 19	5/8 16	1.41 35,8	2.59 65,8	FYJ 65 KF	HE 2313
2 $\frac{3}{8}$ 60,325	1.97 50	0.79 20	2.56 65	6.37 161,9	5.87 149	7.36 187	0.75 19	5/8 16	1.41 35,8	2.59 65,8	FYJ 65 KF	HS 2313

¹⁾ Bearing unit and adapter sleeve to be ordered separately


Designations Bearing unit without adapter sleeve		Separate components		Basic load ratings		Fatigue load limit	Limiting speed	Mass
		Housing	Bearing	dynamic C	static C_0	P_u	r/min	Bearing unit + sleeve
-				lbf/kN		lbf/kN	r/min	lb/kg
FYJ 65 KF	FYJ 513	YSA 213-2FK		12 870 57,2	9 000 40	380 1,7	3 000	13,5 6,20
FYJ 65 KF	FYJ 513	YSA 213-2FK		12 870 57,2	9 000 40	380 1,7	3 000	13,5 6,10
FYJ 65 KF	FYJ 513	YSA 213-2FK		12 870 57,2	9 000 40	380 1,7	3 000	13,5 6,00

**Flanged Y-bearing units with a cast housing with an oval flange and grub screws,
metric shafts**

d 12 – 50 mm

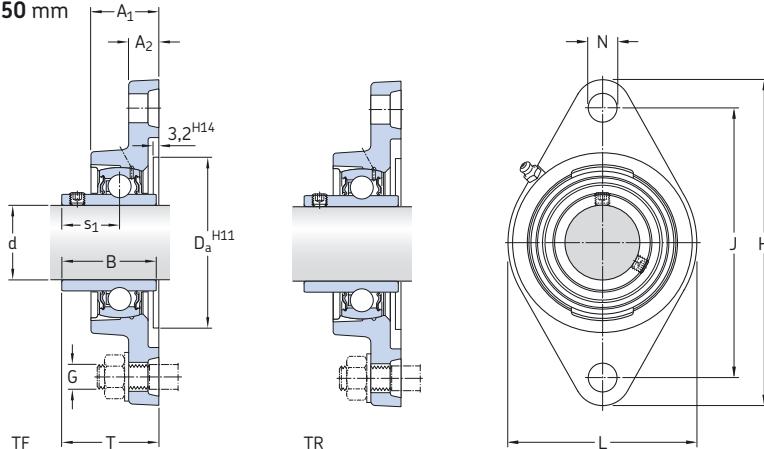


Dimensions													Basic load ratings	Fatigue load limit	Limiting speed with shaft tolerance h6	Designation Bearing unit
d	A ₁	A ₂	B	D _a	H	J	L	N	G	s ₁	T	C	C ₀	P _u	r/min	–
mm													kN	kN	r/min	–
12	26	11	27,4	50,8	98,5	76,5	57	11,5	10	15,9	32,9	9,56	4,75	0,2	9 500	FYTB 12 TF
15	26	11	27,4	50,8	98,5	76,5	57	11,5	10	15,9	32,9	9,56	4,75	0,2	9 500	FYTB 15 TF
17	26	11	27,4	50,8	98,5	76,5	57	11,5	10	15,9	32,9	9,56	4,75	0,2	9 500	FYTB 17 TF
20	29,5	11	31	50,8	112	90	60,5	11,5	10	18,3	37,3	12,7	6,55	0,28	8 500	FYTB 20 TF
	25,5	12	31	50,8	112	90	60	12	10	18,3	33,3	12,7	6,55	0,28	8 500	FYTB 20 TF
	29,5	11	31	50,8	112	90	60,5	11,5	10	18,3	37,3	12,7	6,55	0,28	5 000	FYTB 20 TR
25	30	12	34,1	63,5	124	99	70	11,5	10	19,8	38,8	14	7,8	0,335	7 000	FYTB 25 TF
	27	14	34,1	63,5	130	99	68	16	14	19,8	35,8	14	7,8	0,335	7 000	FYTB 25 TF
	30	12	34,1	63,5	124	99	70	11,5	10	19,8	38,8	14	7,8	0,335	4 300	FYTB 25 TR
30	32,5	13	38,1	76,2	141,5	116,5	83	11,5	10	22,2	42,2	19,5	11,2	0,475	6 300	FYTB 30 TF
	30,5	13,5	38,1	76,2	148	117	80	16	14	22,2	40,2	19,5	11,2	0,475	6 300	FYTB 30 TF
	32,5	13	38,1	76,2	141,5	116,5	83	11,5	10	22,2	42,2	19,5	11,2	0,475	3 800	FYTB 30 TR
35	34,5	13	42,9	88,9	156	130	96	14	12	25,4	46,4	25,5	15,3	0,655	5 300	FYTB 35 TF
	34	16	42,9	88,9	161	130	96	16	14	25,4	44,4	25,5	15,3	0,655	5 300	FYTB 35 TF
	34,5	13	42,9	88,9	156	130	96	14	12	25,4	46,4	25,5	15,3	0,655	3 200	FYTB 35 TR
40	38,5	14	49,2	88,9	171,5	143,5	102	14	12	30,2	54,2	30,7	19	0,8	4 800	FYTB 40 TF
	36	16	49,2	88,9	175	144	100	16	14	30,2	51,2	30,7	19	0,8	4 800	FYTB 40 TF
	38,5	14	49,2	88,9	171,5	143,5	102	14	12	30,2	54,2	30,7	19	0,8	2 800	FYTB 40 TR
45	39	14	49,2	98,4	178,5	148,5	111	16	14	30,2	54,2	33,2	21,6	0,915	4 300	FYTB 45 TF
	38	18	49,2	98,4	188	148	108	19	14	30,2	52,2	33,2	21,6	0,915	4 300	FYTB 45 TF
	39	14	49,2	98,4	178,5	148,5	111	16	14	30,2	54,2	33,2	21,6	0,915	2 400	FYTB 45 TR
50	43	15	51,6	101,6	189	157	116	18	16	32,6	60,6	35,1	23,2	0,98	4 000	FYTB 50 TF
	40	18	51,6	101,6	195	157	115	19	16	32,6	54,6	35,1	23,2	0,98	4 000	FYTB 50 TF
	43	15	51,6	101,6	189	157	116	18	16	32,6	60,6	35,1	23,2	0,98	2 200	FYTB 50 TR



Designations Bearing unit	Separate components		Mass Bearing unit	Appropriate end cover	
	Housing	Bearing		Designation	Dimension
–	–	kg	–	mm	–
FYTB 12 TF	FYTB 503 M	YAR 203/12-2F	0,42	–	–
FYTB 15 TF	FYTB 503 M	YAR 203/15-2F	0,40	–	–
FYTB 17 TF	FYTB 503 M	YAR 203-2F	0,39	–	–
FYTB 20 TF	FYTB 504 M	YAR 204-2F	0,50	ECY 204	18,5
FYJ 20 TF	FYJ 504	YAR 204-2F	0,43	–	–
FYTB 20 TR	FYTB 504 M	YAR 204-2RF	0,50	ECY 204	18,5
FYTB 25 TF	FYTB 505 M	YAR 205-2F	0,63	ECY 205	18
FYJ 25 TF	FYJ 505	YAR 205-2F	0,58	–	–
FYTB 25 TR	FYTB 505 M	YAR 205-2RF	0,63	ECY 205	18
FYTB 30 TF	FYTB 506 M	YAR 206-2F	0,93	ECY 206	20
FYJ 30 TF	FYJ 506	YAR 206-2F	0,93	–	–
FYTB 30 TR	FYTB 506 M	YAR 206-2RF	0,93	ECY 206	20
FYTB 35 TF	FYTB 507 M	YAR 207-2F	1,25	ECY 207	22
FYJ 35 TF	FYJ 507	YAR 207-2F	1,15	–	–
FYTB 35 TR	FYTB 507 M	YAR 207-2RF	1,25	ECY 207	22
FYTB 40 TF	FYTB 508 M	YAR 208-2F	1,65	ECY 208	23,5
FYJ 40 TF	FYJ 508	YAR 208-2F	1,55	–	–
FYTB 40 TR	FYTB 508 M	YAR 208-2RF	1,65	ECY 208	23,5
FYTB 45 TF	FYTB 509 M	YAR 209-2F	1,80	ECY 209	23
FYJ 45 TF	FYJ 509	YAR 209-2F	2,20	–	–
FYTB 45 TR	FYTB 509 M	YAR 209-2RF	1,80	ECY 209	23
FYTB 50 TF	FYTB 510 M	YAR 210-2F	2,15	ECY 210	29,5
FYJ 50 TF	FYJ 510	YAR 210-2F	3,10	–	–
FYTB 50 TR	FYTB 510 M	YAR 210-2RF	2,15	ECY 210	29,5

**Flanged Y-bearing units with a cast housing with an oval flange and grub screws,
inch shafts**

d 1/2 – 1 1/8 in

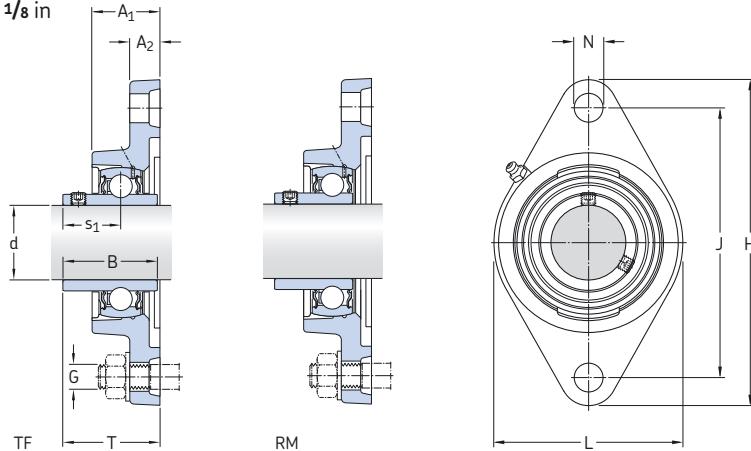

Dimensions


Designation
Bearing unit

d	A ₁	A ₂	B	H	J	L	N	G	s ₁	T	Designation
in/mm											
1/2	0.92	0.45	0.89	3.88	3.00	2.13	0.44	3/8	0.63	1.20	FYT 1/2 RM
12,7	23,4	11,5	22,5	98,5	76,2	54	11,1	10	16	30,6	
	0.92	0.45	1.08	3.88	3.00	2.13	0.44	3/8	0.63	1.20	FYT 1/2 TF
	23,4	11,5	27,4	98,5	76,2	54	11,1	10	15,9	30,6	
5/8	0.92	0.45	0.89	3.88	3.00	2.13	0.44	3/8	0.63	1.20	FYT 5/8 RM
15,875	23,4	11,5	22,5	98,5	76,2	54	11,1	10	16	30,6	
	0.92	0.45	1.08	3.88	3.00	2.13	0.44	3/8	0.63	1.20	FYT 5/8 TF
	23,4	11,5	27,4	98,5	76,2	54	11,1	10	15,9	30,6	
3/4	0.97	0.44	1.00	4.41	3.53	2.38	0.44	3/8	0.72	1.28	FYT 3/4 RM
19,05	24,6	11,1	25,5	111,9	89,7	60,5	11,1	10	18,3	32,6	
	0.97	0.44	1.22	4,41	3,53	2,38	0,44	3/8	0,72	1,28	FYT 3/4 TF/AH
	24,6	11,1	31	111,9	89,7	60,5	11,1	10	18,3	32,6	
	1,16	0,43	1,22	4,41	3,54	2,38	0,45	3/8	0,72	1,47	FYT B 3/4 TF
	29,5	11	31	112	90	60,5	11,5	10	18,3	37,3	
	1,00	0,47	1,22	4,41	3,54	2,36	0,47	3/8	0,72	1,31	FYTJ 3/4 TF
	25,5	12	31	112	90	60	12	10	18,3	33,3	
7/8	1,18	0,47	1,34	4,88	3,89	2,76	0,50	7/16	0,78	1,53	FYT 7/8 TF
22,225	30	12	34,1	124	98,8	70	12,7	11	19,8	38,8	
15/16	1,18	0,47	1,07	4,88	3,89	2,76	0,50	7/16	0,77	1,53	FYT 15/16 RM
23,813	30	12	27,2	124	98,8	70	12,7	11	19,5	38,8	
	1,18	0,47	1,34	4,88	3,89	2,76	0,50	7/16	0,78	1,53	FYT 15/16 TF
	30	12	34,1	124	98,8	70	12,7	10	19,8	38,8	
1	1,18	0,47	1,07	4,88	3,89	2,76	0,50	7/16	0,77	1,53	FYT 1. RM
25,4	30	12	27,2	124	98,8	70	12,7	10	19,5	38,8	
	1,18	0,47	1,34	4,88	3,89	2,76	0,50	7/16	0,78	1,53	FYT 1. TF
	30	12	34,1	124	98,8	70	12,7	10	19,8	38,8	
	1,18	0,47	1,34	4,88	3,90	2,76	0,45	3/8	0,78	1,53	FYT B 1. TF
	30	12	34,1	124	99	70	11,5	10	19,8	38,8	
	1,06	0,55	1,34	5,12	3,90	2,68	0,63	9/16	0,78	1,41	FYTJ 1. TF
	27	14	34,1	130	99	68	16	14	19,8	35,8	
1 1/8	1,28	0,51	1,50	5,57	4,60	3,27	0,50	7/16	0,87	1,66	FYT 1.1/8 TF
28,575	32,5	13	38,1	141,5	116,9	83	12,7	10	22,2	42,2	

Designations Bearing unit	Separate components Housing	Bearing	Basic load ratings		Fatigue load limit P_u	Limiting speed with shaft tolerance $h6$	Mass Bearing unit	
-			dynamic C	static C_0	lbs/kN	lbs/kN	r/min	lb/kg
FYT 1/2 RM	FYT 503 U	YAT 203-008	2 150 9,56	1 070 4,75	50 0,2	9 500	0,68 0,31	
FYT 1/2 TF	FYT 503 U	YAR 203-008-2F	2 150 9,56	1 070 4,75	50 0,2	9 500	0,73 0,33	
FYT 5/8 RM	FYT 503 U	YAT 203-010	2 150 9,56	1 070 4,75	50 0,2	9 500	0,66 0,30	
FYT 5/8 TF	FYT 503 U	YAR 203-010-2F	2 150 9,56	1 070 4,75	50 0,2	9 500	0,68 0,31	
FYT 3/4 RM	FYT 504 U	YAT 204-012	2 860 12,7	1 470 6,55	60 0,28	8 500	1,05 0,47	
FYT 3/4 TF/AH	FYT 504 U/AH	YAR 204-012-2F/AH	2 860 12,7	1 470 6,55	60 0,28	8 500	1,10 0,50	
FYTB 3/4 TF	FYTB 504 M	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	8 500	1,10 0,50	
FYTJ 3/4 TF	FYTJ 504	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	8 500	0,95 0,43	
FYT 7/8 TF	FYT 505 U	YAR 205-014-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,45 0,66	
FYT 15/16 RM	FYT 505 U	YAT 205-015	3 150 14	1 760 7,8	80 0,335	7 000	1,35 0,61	
FYT 15/16 TF	FYT 505 U	YAR 205-015-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,40 0,64	
FYT 1. RM	FYT 505 U	YAT 205-100	3 150 14	1 760 7,8	80 0,335	7 000	1,30 0,60	
FYT 1. TF	FYT 505 U	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,30 0,60	
FYTB 1. TF	FYTB 505 M	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,40 0,63	
FYTJ 1. TF	FYTJ 505	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1,30 0,58	
FYT 1.1/8 TF	FYT 506 U	YAR 206-102-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2,10 0,95	

**Flanged Y-bearing units with a cast housing with an oval flange and grub screws,
inch shafts**

d $1\frac{3}{16}$ – $1\frac{11}{16}$ in

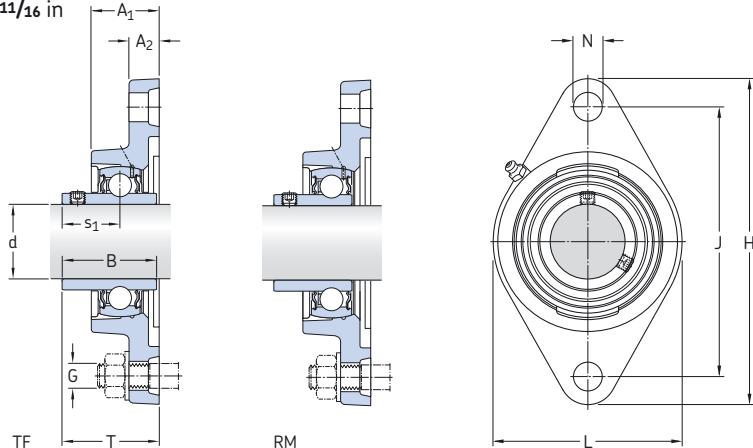

Dimensions


Designation
Bearing unit

d	A ₁	A ₂	B	H	J	L	N	G	s ₁	T	Designation
in/mm											
$1\frac{3}{16}$ 30,163	1.28 32,5	0.51 13	1.22 31	5.57 141,5	4.60 116,9	3.27 83	0.50 12,7	$\frac{7}{16}$ 10	0.87 22	1.66 42,2	FYT 1.3/16 RM
	1.28 32,5	0.51 13	1.50 38,1	5.57 141,5	4.60 116,9	3.27 83	0.50 12,7	$\frac{7}{16}$ 10	0.87 22,2	1.66 42,2	FYT 1.3/16 TF
$1\frac{1}{4}$ 31,75	1.36 34,5	0.51 13	1.38 35	6.14 156	5.13 130,2	3.78 96	0.56 14,3	$\frac{1}{2}$ 12	1.00 25,5	1.83 46,4	FYT 1.1/4 RM
	1.36 34,5	0.51 13	1.69 42,9	6.14 156	5.12 130	3.78 96	0.55 14	$\frac{1}{2}$ 12	1.00 25,4	1.83 46,4	FYT 1.1/4 TF
	1.34 34	0.63 16	1.69 42,9	6.34 161	5.12 130	3.78 96	0.63 16	$\frac{9}{16}$ 14	1.00 25,4	1.75 44,4	FYTJ 1.1/4 TF
$1\frac{5}{16}$ 33,338	1.36 34,5	0.51 13	1.69 42,9	6.14 156	5.13 130,2	3.78 96	0.56 14,3	$\frac{1}{2}$ 12	1.00 25,4	1.83 46,4	FYT 1.5/16 TF
$1\frac{3}{8}$ 34,925	1.36 34,5	0.51 13	1.38 35	6.14 156	5.13 130,2	3.78 96	0.56 14,3	$\frac{1}{2}$ 12	1.00 25,5	1.83 46,4	FYT 1.3/8 RM
	1.36 34,5	0.51 13	1.69 42,9	6.14 156	5.13 130,2	3.78 96	0.56 14,3	$\frac{1}{2}$ 12	1.00 25,4	1.83 46,4	FYT 1.3/8 TF
$1\frac{7}{16}$ 36,513	1.36 34,5	0.51 13	1.38 35	6.14 156	5.13 130,2	3.78 96	0.56 14,3	$\frac{1}{2}$ 12	1.00 25,5	1.83 46,4	FYT 1.7/16 RM
	1.36 34,5	0.51 13	1.69 42,9	6.14 156	5.13 130,2	3.78 96	0.56 14,3	$\frac{1}{2}$ 12	1.00 25,4	1.83 46,4	FYT 1.7/16 TF
$1\frac{1}{2}$ 38,1	1.52 38,5	0.55 14	1.57 40	6.75 171,5	5.66 143,7	4.02 102	0.56 14,3	$\frac{1}{2}$ 12	1.12 28,5	2.07 52,6	FYT 1.1/2 RM
	1.52 38,5	0.55 14	1.94 49,2	6.75 171,5	5.66 143,7	4.02 102	0.56 14,3	$\frac{1}{2}$ 12	1.12 30,2	2.13 54,2	FYT 1.1/2 TF
	1.52 38,5	0.55 14	49,2 178,5	6.75 148,4	5.65 111	4.02 111	0.55 15,9	$\frac{1}{2}$ 14	1.19 30,2	2.13 54,2	FYT 1.1/2 TF
	1.52 38,5	0.55 14	1.94 49,2	6.75 178,5	5.67 148,4	3.94 111	0.63 15,9	$\frac{9}{16}$ 14	1.19 30,2	2.02 51,2	FYTJ 1.1/2 TF
$1\frac{5}{8}$ 41,275	1.54 39	0.55 14	1.94 49,2	7.03 178,5	5.84 148,4	4.37 111	0.63 15,9	$\frac{9}{16}$ 14	1.19 30,2	2.13 54,2	FYT 1.5/8 TF
$1\frac{11}{16}$ 42,863	1.54 39	0.55 14	1.63 41,5	7.03 178,5	5.84 148,4	4.37 111	0.63 15,9	$\frac{9}{16}$ 14	1.20 30,5	2.13 54,2	FYT 1.11/16 RM
	1.54 39	0.55 14	1.94 49,2	7.03 178,5	5.84 148,4	4.37 111	0.63 15,9	$\frac{9}{16}$ 14	1.19 30,2	2.13 54,2	FYT 1.11/16 TF

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings dynamic C static C ₀		Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Mass Bearing unit
–			lbs/kN		lbs/kN	r/min	lb/kg
FYT 1.3/16 RM	FYT 506 U	YAT 206-103	4 390 19,5	2 520 11,2	110 0,475	6 300	1,95 0,88
FYT 1.3/16 TF	FYT 506 U	YAR 206-103-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2,05 0,93
FYT 1.1/4 RM	FYT 507 U	YAT 207-104	5 740 25,5	3 440 15,3	150 0,655	5 300	2,65 1,21
FYTB 1.1/4 TF	FYTB 507 U	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3,10 1,40
FYTJ 1.1/4 TF	FYTJ 507 U	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	2,85 1,30
FYT 1.5/16 TF	FYT 507 U	YAR 207-105-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	2,85 1,30
FYT 1.3/8 RM	FYT 507 U	YAT 207-106	5 740 25,5	3 440 15,3	150 0,655	5 300	2,60 1,15
FYT 1.3/8 TF	FYT 507 U	YAR 207-106-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	2,80 1,27
FYT 1.7/16 RM	FYT 507 U	YAT 207-107	5 740 25,5	3 440 15,3	150 0,655	5 300	2,50 1,14
FYT 1.7/16 TF	FYT 507 U	YAR 207-107-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	2,75 1,25
FYT 1.1/2 RM	FYT 508 U	YAT 208-108	6 910 30,7	4 280 19	180 0,8	4 800	3,55 1,60
FYT 1.1/2 TF	FYT 508 U	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	4 800	3,60 1,70
FYTB 1.1/2 TF	FYTB 508 M	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	4 800	3,75 1,70
FYTJ 1.1/2 TF	FYTJ 508	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	4 800	3,55 1,60
FYT 1.5/8 TF	FYT 509 U	YAR 209-110-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	4,20 1,90
FYT 1.11/16 RM	FYT 509 U	YAT 209-111	7 470 33,2	4 860 21,6	210 0,915	4 300	3,85 1,74
FYT 1.11/16 TF	FYT 509 U	YAR 209-111-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	4,10 1,86

**Flanged Y-bearing units with a cast housing with an oval flange and grub screws,
inch shafts**

d $1\frac{3}{4}$ – $2\frac{3}{16}$ in

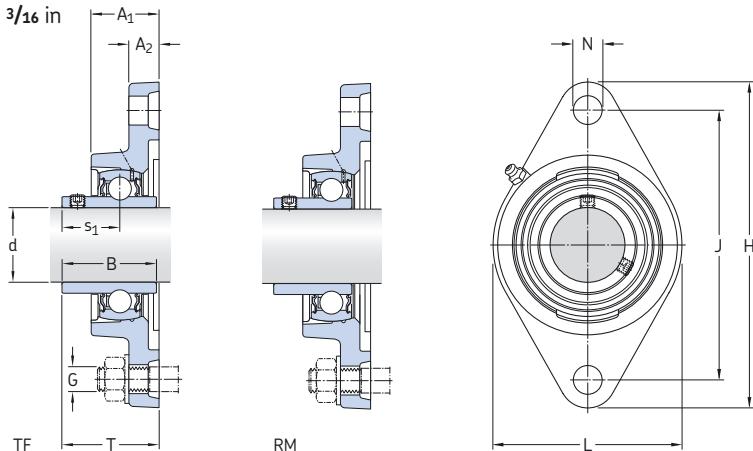

Dimensions


Designation
Bearing unit

d	A ₁	A ₂	B	H	J	L	N	G	s ₁	T	Designation
in/mm											
1 3/4	1.54	0.55	1.63	7.03	5.84	4.37	0.63	9/16	1.20	2.13	FYT 1.3/4 RM
44,45	39	14	41,5	178,5	148,4	111	15,9	14	30,5	54,2	FYT 1.3/4 TF
	1.54	0.55	1.94	7.03	5.84	4.37	0.63	9/16	1.19	2.13	
	39	14	49,2	178,5	148,4	111	15,9	14	30,2	54,2	
	1.54	0.55	1.94	7.03	5.85	4.37	0.63	9/16	1.19	2.13	FYTB 1.3/4 TF
	39	14	49,2	178,5	148,5	111	16	14	30,2	54,2	
	1.50	0.71	1.94	7.40	5.83	4.25	0.75	5/8	1.19	2.06	FYTJ 1.3/4 TF
	38	18	49,2	188	148	108	19	16	30,2	52,2	
1 15/16	1.69	0.59	1.69	7.44	6.19	4.57	0.63	9/16	1.26	2.37	FYT 1.15/16 RM
49,213	43	15	43	189	157,2	116	15,9	14	32	60,1	FYT 1.15/16 TF
	1.69	0.59	2.03	7.44	6.19	4.57	0.63	9/16	1.28	2.39	
	43	15	51,6	189	157,2	116	15,9	14	32,6	60,6	
2	1.88	0.81	1.77	8.50	7.25	5.00	0.75	5/8	1.28	2.45	FYT 2. RM
50,8	47,6	20,6	45	216	184,2	127	19	16	32,5	62,3	FYT 2. TF
	1.88	0.81	2.19	8.50	7.25	5.00	0.75	5/8	1.32	2.47	
	47,6	20,6	55,6	216	184,2	127	19	16	33,4	62,8	
2 3/16	1.88	0.81	1.77	8.50	7.25	5.00	0.75	5/8	1.28	2.45	FYT 2.3/16 RM
55,563	47,6	20,6	45	216	184,2	127	19	16	32,5	62,3	FYT 2.3/16 TF
	1.88	0.81	2.19	8.50	7.25	5.00	0.75	5/8	1.32	2.47	
	47,6	20,6	55,6	216	184,2	127	19	16	33,4	62,8	

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings		Fatigue load limit P_u	Limiting speed with shaft tolerance h6	Mass Bearing unit
–			lbs/kN	lbs/kN	r/min	lb/kg	
FYT 1.3/4 RM	FYT 509 U	YAT 209-112	7 470 33,2	4 860 21,6	210 0,915	4 300	3,75 1,70
FYT 1.3/4 TF	FYT 509 U	YAR 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	3,95 1,80
FYTB 1.3/4 TF	FYTB 509 M	YAR 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	3,95 1,80
FYTJ 1.3/4 TF	FYTJ 509	YAR 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	4,85 2,20
FYT 1.15/16 RM	FYT 510 U	YAT 210-115	7 900 35,1	5 220 23,2	220 0,98	4 000	4,65 2,10
FYT 1.15/16 TF	FYT 510 U	YAR 210-115-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	4,95 2,25
FYT 2. RM	FYT 511 U	YAT 211-200	9 810 43,6	6 530 29	280 1,25	3 600	7,30 3,30
FYT 2. TF	FYT 511 U	YAR 211-200-2F	9 810 43,6	6 530 29	280 1,25	3 600	7,60 3,45
FYT 2.3/16 RM	FYT 511 U	YAT 211-203	9 810 43,6	6 530 29	280 1,25	3 600	6,90 3,10
FYT 2.3/16 TF	FYT 511 U	YAR 211-203-2F	9 810 43,6	6 530 29	280 1,25	3 600	7,20 3,25


Flanged Y-bearing units with a cast housing with an oval flange and an eccentric locking collar, metric shafts

d 15 – 50 mm

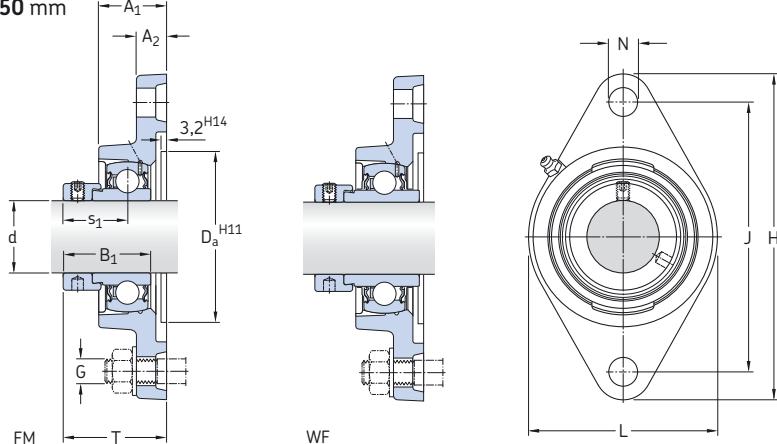

Dimensions


d	A ₁	A ₂	B ₁	D _a	H	J	L	N	G	s ₁	T	Basic load ratings	Fatigue load limit P _u	Limiting speed with shaft tolerance h ₆	Designation Bearing unit	
												C				
mm												kN		kN		
15	26	11	28,6	50,8	98,5	76,5	57	11,5	10	22,1	39,1	9,56	4,75	0,2	9 500	FYTB 15 FM
17	26	11	28,6	50,8	98,5	76,5	57	11,5	10	22,1	39,1	9,56	4,75	0,2	9 500	FYTB 17 FM
20	29,5	11	31	50,8	112	90	60,5	11,5	10	23,5	42,5	12,7	6,55	0,28	8 500	FYTB 20 FM
	29,5	11	43,7	50,8	112	90	60,5	11,5	10	26,6	45,6	12,7	6,55	0,28	8 500	FYTB 20 WF
25	30	12	31	63,5	124	99	70	11,5	10	23,5	42,5	14	7,8	0,335	7 000	FYTB 25 FM
	30	12	44,4	63,5	124	99	70	11,5	10	26,9	45,9	14	7,8	0,335	7 000	FYTB 25 WF
30	32,5	13	35,7	76,2	141,5	116,5	83	11,5	10	26,7	46,7	19,5	11,2	0,475	6 300	FYTB 30 FM
	32,5	13	48,4	76,2	141,5	116,5	83	11,5	10	30,1	50,1	19,5	11,2	0,475	6 300	FYTB 30 WF
35	34,5	13	38,9	88,9	156	130	96	14	12	29,4	50,4	25,5	15,3	0,655	5 300	FYTB 35 FM
	34,5	13	51,1	88,9	156	130	96	14	12	32,3	53,3	25,5	15,3	0,655	5 300	FYTB 35 WF
40	38,5	14	43,7	88,9	171,5	143,5	102	14	12	32,7	56,7	30,7	19	0,8	4 800	FYTB 40 FM
	38,5	14	56,3	88,9	171,5	143,5	102	14	12	34,9	58,9	30,7	19	0,8	4 800	FYTB 40 WF
45	39	14	43,7	98,4	178,5	148,5	111	16	14	32,7	56,7	33,2	21,6	0,915	4 300	FYTB 45 FM
	39	14	56,3	98,4	178,5	148,5	111	16	14	34,9	58,9	33,2	21,6	0,915	4 300	FYTB 45 WF
50	43	15	43,7	101,6	189	157	116	18	16	32,7	60,7	35,1	23,2	0,98	4 000	FYTB 50 FM
	43	15	62,7	101,6	189	157	116	18	16	38,1	66,1	35,1	23,2	0,98	4 000	FYTB 50 WF



Designations Bearing unit		Separate components	Mass Bearing unit	Appropriate end cover	
		Housing	Bearing	Designation	Dimension A ₅
FYTB 15 FM	FYTB 503 M	YET 203/15	0,42	–	–
FYTB 17 FM	FYTB 503 M	YET 203	0,41	–	–
FYTB 20 FM	FYTB 504 M	YET 204	0,52	ECY 204	18,5
FYTB 20 WF	FYTB 504 M	YEL 204-2F	0,55	ECY 204	18,5
FYTB 25 FM	FYTB 505 M	YET 205	0,64	ECY 205	18
FYTB 25 WF	FYTB 505 M	YEL 205-2F	0,69	ECY 205	18
FYTB 30 FM	FYTB 506 M	YET 206	0,95	ECY 206	20
FYTB 30 WF	FYTB 506 M	YEL 206-2F	1,00	ECY 206	20
FYTB 35 FM	FYTB 507 M	YET 207	1,30	ECY 207	22
FYTB 35 WF	FYTB 507 M	YEL 207-2F	1,40	ECY 207	22
FYTB 40 FM	FYTB 508 M	YET 208	1,70	ECY 208	23,5
FYTB 40 WF	FYTB 508 M	YEL 208-2F	1,80	ECY 208	23,5
FYTB 45 FM	FYTB 509 M	YET 209	1,85	ECY 209	23
FYTB 45 WF	FYTB 509 M	YEL 209-2F	1,95	ECY 209	23
FYTB 50 FM	FYTB 510 M	YET 210	2,20	ECY 210	29,5
FYTB 50 WF	FYTB 510 M	YEL 210-2F	2,35	ECY 210	29,5

Flanged Y-bearing units with a cast housing with an oval flange and an eccentric locking collar, inch shafts

d $\frac{1}{2}$ – $1\frac{15}{16}$ in

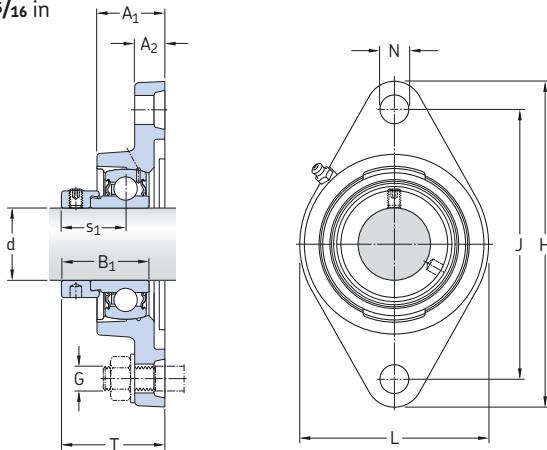

Dimensions


Designation
Bearing unit

d	A ₁	A ₂	B ₁	H	J	L	N	G	s ₁	T	Designation
in/mm											
1/2 12,7	0.92 23,4	0.45 11,5	1.13 26,6	3.88 98,5	3.00 76,2	2.13 54	0.44 11,1	3/8 10	0.87 22,1	1.45 36,8	FYT 1/2 FM
5/8 15,875	0.92 23,4	0.45 11,5	1.13 28,6	3.88 98,5	3.00 76,2	2.13 54	0.44 11,1	3/8 10	0.87 22,1	1.45 36,8	FYT 5/8 FM
3/4 19,05	0.97 24,6	0.44 11,1	1.22 31	4.41 112	3.53 89,7	2.38 60,3	0.44 11,1	3/8 10	0.93 23,5	1.49 37,8	FYT 3/4 FM
7/8 22,225	1.18 30	0.47 12	1.22 31	4.88 124	3.89 98,8	2.76 70	0.50 12,7	7/16 10	0.93 23,5	1.67 42,5	FYT 7/8 FM
15/16 23,813	1.18 30	0.47 12	1.22 31	4.88 124	3.89 98,8	2.76 70	0.50 12,7	7/16 10	0.93 23,5	1.67 42,5	FYT 15/16 FM
1 25,4	1.18 30	0.47 12	1.22 31	4.88 124	3.89 98,8	2.76 70	0.50 12,7	7/16 10	0.93 23,5	1.67 42,5	FYT 1. FM
1 1/8 28,575	1.28 32,5	0.51 13	1.41 35,7	5.57 141,5	4.59 116,9	3.27 83	0.50 12,7	7/16 10	1.05 26,7	1.84 46,7	FYT 1.1/8 FM
1 3/16 30,163	1.28 32,5	0.51 13	1.41 35,7	5.57 141,5	4.59 116,9	3.27 83	0.50 12,7	7/16 10	1.05 26,7	1.84 46,7	FYT 1.3/16 FM
1 1/4 31,75	1.36 34,5	0.51 13	1.53 38,9	6.14 156	5.13 130,2	3.78 96	0.56 14,3	1/2 12	1.16 29,4	1.98 50,4	FYT 1.1/4 FM
1 3/8 34,925	1.36 34,5	0.51 13	1.53 38,9	6.14 156	5.13 130,2	3.78 96	0.56 14,3	1/2 12	1.16 29,4	1.98 50,4	FYT 1.3/8 FM
1 7/16 36,513	1.36 34,5	0.51 13	1.53 38,9	6.14 156	5.13 130,2	3.78 96	0.56 14,3	1/2 12	1.16 29,4	1.98 50,4	FYT 1.7/16 FM
1 1/2 38,1	1.52 38,5	0.55 14	1.72 43,7	6.75 171,5	5.66 143,7	4.02 102	0.56 14,3	1/2 12	1.29 32,7	2.24 56,5	FYT 1.1/2 FM
1 1/4 44,45	1.54 39	0.55 14	1.72 43,7	7.03 178,5	5.84 148,4	4.37 111	0.63 15,9	9/16 14	1.29 32,7	2.23 56,7	FYT 1.3/4 FM
1 15/16 49,213	1.69 43	0.59 15	1.72 43,7	7.44 189	6.19 157,2	4.57 116	0.63 15,9	9/16 14	1.29 32,7	2.39 60,7	FYT 1.15/16 FM

Designations Bearing unit	Separate components		Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass Bearing unit
	Housing	Bearing	dynamic C	static C ₀	lbf/kN	r/min	lb/kg
FYT 1/2 FM	FYT 503 U	YET 203-008	2 150 9,56	1 070 4,75	50 0,2	9 500	0,77 0,35
FYT 5/8 FM	FYT 503 U	YET 203-010	2 150 9,56	1 070 4,75	50 0,2	9 500	0,75 0,34
FYT 3/4 FM	FYT 504 U	YET 204-012	2 860 12,7	1 470 6,55	60 0,28	8 500	1,15 0,53
FYT 7/8 FM	FYT 505 U	YET 205-014	3 150 14	1 760 7,8	80 0,335	7 000	1,45 0,67
FYT 15/16 FM	FYT 505 U	YET 205-015	3 150 14	1 760 7,8	80 0,335	7 000	1,45 0,66
FYT 1. FM	FYT 505 U	YET 205-100	3 150 14	1 760 7,8	80 0,335	7 000	1,40 0,64
FYT 1.1/8 FM	FYT 506 U	YET 206-102	4 390 19,5	2 520 11,2	110 0,475	6 300	2,15 0,98
FYT 1.3/16 FM	FYT 506 U	YET 206-103	4 390 19,5	2 520 11,2	110 0,475	6 300	2,15 0,97
FYT 1.1/4 FM	FYT 507 U	YET 207-104	5 740 25,5	3 440 15,3	150 0,655	5 300	3,10 1,40
FYT 1.3/8 FM	FYT 507 U	YET 207-106	5 740 25,5	3 440 15,3	150 0,655	5 300	2,95 1,35
FYT 1.7/16 FM	FYT 507 U	YET 207-107	5 740 25,5	3 440 15,3	150 0,655	5 300	2,90 1,30
FYT 1.1/2 FM	FYT 508 U	YET 208-108	6 910 30,7	4 280 19	180 0,8	4 800	3,80 1,75
FYT 1.3/4 FM	FYT 509 U	YET 209-112	7 470 33,2	4 860 21,6	210 0,915	4 300	4,10 1,85
FYT 1.15/16 FM	FYT 510 U	YET 210-115	7 900 35,1	5 220 23,2	220 0,98	4 000	5,05 2,30

**Flanged Y-bearing units with a cast housing with an oval flange and an eccentric locking collar,
inch shafts**

d 2 – 2 $\frac{3}{16}$ in

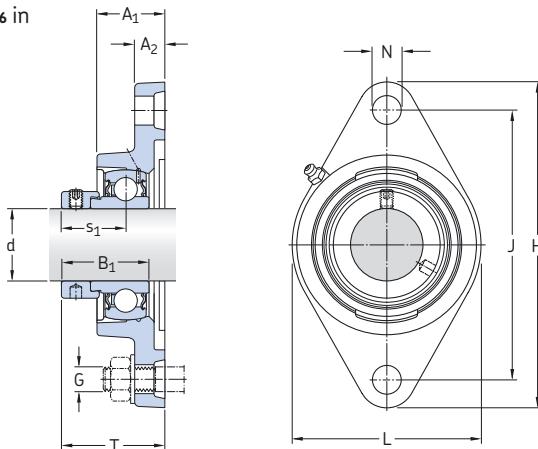

Dimensions


Designation
Bearing unit

d	A ₁	A ₂	B ₁	H	J	L	N	G	s ₁	T	
<i>in/mm</i>											
2 50,8	1.88 47,6	0.81 20,6	1.91 48,4	8.50 216	7.25 184,2	5.00 127	0.75 19,0	5/8 16	1.43 36,4	2.59 65,8	FYT 2. FM
2 $\frac{3}{16}$ 55,563	1.88 47,6	0.81 20,6	1.91 48,4	8.50 216	7.25 184,2	5.00 127	0.75 19,0	5/8 16	1.43 36,4	2.59 65,8	FYT 2.3/16 FM

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings dynamic C static C_0		Fatigue load limit P_u	Limiting speed with shaft tolerance h6	Mass Bearing unit
–			lbf/kN		lbf/kN	r/min	lb/kg
FYT 2. FM	FYT 511 U	YET 211-200	9 810 43,6	6 530 29	280 1,25	3 600	7,60 3,45
FYT 2.3/16 FM	FYT 511 U	YET 211-203	9 810 43,6	6 530 29	280 1,25	3 600	7,35 3,35

Flanged Y-bearing units with a cast housing with an oval flange and an adapter sleeve,
metric shafts

d 20 – 45 mm

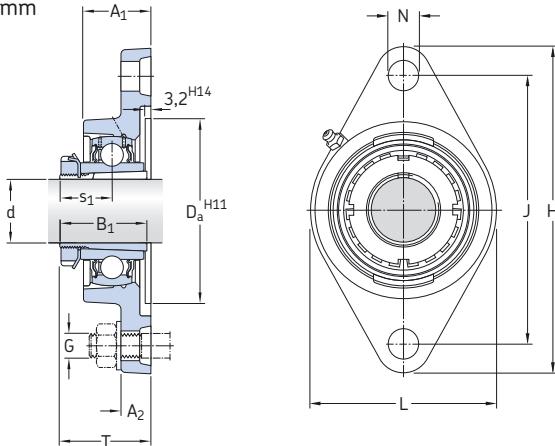

Dimensions


d	A ₁	A ₂	B ₁	D _a	H	J	L	N	G	s ₁	T	Basic load ratings		Fatigue load limit P _u	Designations ¹⁾	
												C	C ₀		Bearing unit	Adapter sleeve
mm												kN	kN	–		
20	27	14	35	63,5	130	99	68	16	14	20	36	14	7,8	0,335	FYTJ 25 KF	H 2305
25	30,5	13,5	38	76,2	148	117	80	16	14	22	40	19,5	11,2	0,475	FYTJ 30 KF	H 2306
30	34	16	43	88,9	161	130	96	16	14	24,3	43,3	25,5	15,3	0,655	FYTJ 35 KF	H 2307
35	36	16	46	88,9	175	144	100	16	14	27	48	30,7	19	0,8	FYTJ 40 KF	H 2308
40	38	18	50	98,4	188	148	108	19	16	28,5	50,5	33,2	21,6	0,915	FYTJ 45 KF	H 2309
45	40	18	55	101,6	195	157	115	19	16	30,5	52,5	35,1	23,2	0,98	FYTJ 50 KF	H 2310

¹⁾ Bearing unit and adapter sleeve to be ordered separately

Designations Bearing unit without adapter sleeve	Separate components of the bearing unit		Limiting speed	Mass Bearing unit + sleeve
-			r/min	kg
FYTJ 25 KF	FYTJ 505	YSA 205-2FK	7 000	0,72
FYTJ 30 KF	FYTJ 506	YSA 206-2FK	6 300	0,83
FYTJ 35 KF	FYTJ 507	YSA 207-2FK	5 300	1,30
FYTJ 40 KF	FYTJ 508	YSA 208-2FK	4 800	1,65
FYTJ 45 KF	FYTJ 509	YSA 209-2FK	4 300	2,20
FYTJ 50 KF	FYTJ 510	YSA 210-2FK	4 000	2,55

**Flanged Y-bearing units with a cast housing with an oval flange and an adapter sleeve,
inch shafts**

d $\frac{3}{4}$ – $1\frac{3}{4}$ in

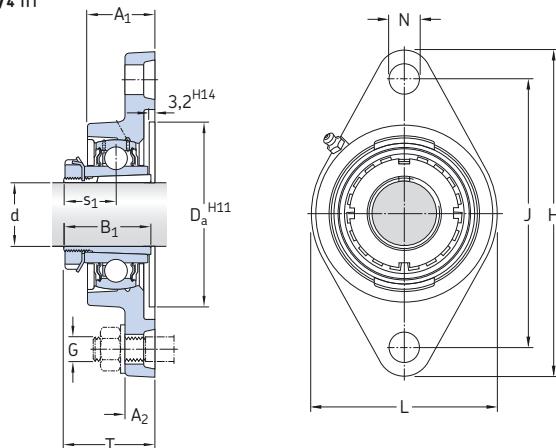

Dimensions

Designations¹⁾
Bearing
unit Adapter
sleeve


d	A ₁	A ₂	B ₁	D _a	H	J	L	N	G	s ₁	T		
in/mm													
$\frac{3}{4}$ 19,05	1.06 27	0.55 14	1.38 35	2.50 63,5	5.12 130	3.90 99	2.68 68	0.63 16	$\frac{9}{16}$ 14	0.79 20	1.42 36	FYTJ 25 KF	HE 2305
$1\frac{5}{16}$ 23,813	1.20 30,5	0.53 13,5	1.50 38	3.00 76,2	5.83 148	4.61 117	3.15 80	0.63 16	$\frac{9}{16}$ 14	0.87 22	1.57 40	FYTJ 30 KF	HA 2306
1 25,4	1.20 30,5	0.53 13,5	1.50 38	3.00 76,2	5.83 148	4.61 117	3.15 80	0.63 16	$\frac{9}{16}$ 14	0.87 22	1.57 40	FYTJ 30 KF	HE 2306
$1\frac{3}{16}$ 30,163	1.34 34	0.63 16	1.69 43	3.50 88,9	6.34 161	5.12 130	3.78 96	0.63 16	$\frac{9}{16}$ 14	0.96 24,3	1.70 43,3	FYTJ 35 KF	HA 2307
$1\frac{1}{4}$ 31,75	1.42 36	0.63 16	1.81 46	3.50 88,9	6.89 175	5.67 144	3.94 100	0.63 16	$\frac{9}{16}$ 14	1.06 27	1.89 48	FYTJ 40 KF	HE 2308
$1\frac{7}{16}$ 36,513	1.50 38	0.71 18	1.97 50	3.87 98,4	7.40 188	5.83 148	4.25 108	0.75 19	$\frac{5}{8}$ 16	1.12 28,5	1.99 50,5	FYTJ 45 KF	HA 2309
$1\frac{1}{2}$ 38,1	1.50 38	0.71 18	1.97 50	3.87 98,4	7.40 188	5.83 148	4.25 108	0.75 19	$\frac{5}{8}$ 16	1.12 28,5	1.99 50,5	FYTJ 45 KF	HE 2309
$1\frac{5}{8}$ 41,275	1.57 40	0.71 18	2.17 55	4.00 101,6	7.68 195	6.18 157	4.53 115	0.75 19	$\frac{5}{8}$ 16	1.20 30,5	2.07 52,5	FYTJ 50 KF	HS 2310
$1\frac{11}{16}$ 42,863	1.57 40	0.71 18	2.17 55	4.00 101,6	7.68 195	6.18 157	4.53 115	0.75 19	$\frac{5}{8}$ 16	1.20 30,5	2.07 52,5	FYTJ 50 KF	HA 2310
$1\frac{3}{4}$ 44,45	1.57 40	0.71 18	2.17 55	4.00 101,6	7.68 195	6.18 157	4.53 115	0.75 19	$\frac{5}{8}$ 16	1.20 30,5	2.07 52,5	FYTJ 50 KF	HE 2310

¹⁾ Bearing unit and adapter sleeve to be ordered separately

Designations Bearing unit without adapter sleeve		Separate components		Basic load ratings		Fatigue load limit	Limiting speed	Mass Bearing unit + sleeve
				dynamic C	static C ₀	P _u	r/min	lb/kg
-				lbf/kN	lbf/kN			
FYTJ 25 KF	FYTJ 505	YSA 205-2FK		3 150 14	1 760 7,8	80 0,335	7 000	1,60 0,72
FYTJ 30 KF	FYTJ 506	YSA 206-2FK		4 390 19,5	2 520 11,2	110 0,475	6 300	1,85 0,83
FYTJ 30 KF	FYTJ 506	YSA 206-2FK		4 390 19,5	2 520 11,2	110 0,475	6 300	1,85 0,83
FYTJ 35 KF	FYTJ 507	YSA 207-2FK		5 740 25,5	3 440 15,3	150 0,655	5 300	2,85 1,30
FYTJ 40 KF	FYTJ 508	YSA 208-2FK		6 910 30,7	4 280 19	180 0,8	4 800	3,65 1,65
FYTJ 45 KF	FYTJ 509	YSA 209-2FK		7 470 33,2	4 860 21,6	210 0,915	4 300	4,85 2,20
FYTJ 45 KF	FYTJ 509	YSA 209-2FK		7 470 33,2	4 860 21,6	210 0,915	4 300	4,85 2,20
FYTJ 50 KF	FYTJ 510	YSA 210-2FK		7 900 35,1	5 220 23,2	220 0,98	4 000	5,60 2,55
FYTJ 50 KF	FYTJ 510	YSA 210-2FK		7 900 35,1	5 220 23,2	220 0,98	4 000	5,60 2,55
FYTJ 50 KF	FYTJ 510	YSA 210-2FK		7 900 35,1	5 220 23,2	220 0,98	4 000	5,60 2,55

**Flanged Y-bearing units with a cast housing with a round flange and grub screws,
metric shafts**

d 20 – 65 mm

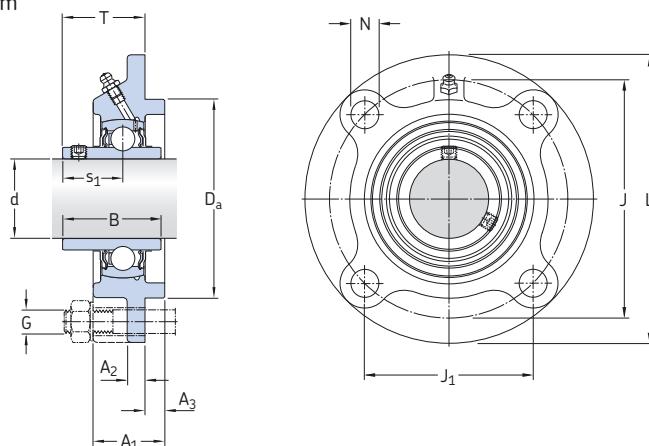


Dimensions


d	A ₁	A ₂	A ₃	B	D _a h8	J	J ₁	L	N	G	s ₁	T	Basic load ratings	Fatigue load limit P _u	Limiting speed with shaft tolerance h6	Designation Bearing unit	
													C dynamic				
20	25,5	7	5	31	62	78	55,2	100	12	10	18,3	28,3	12,7	6,55	0,28	8 500	FYC 20 TF
25	27	7	6	34,1	70	90	63,6	115	12	10	19,8	29,8	14	7,8	0,335	7 000	FYC 25 TF
30	31	8	8	38,1	80	100	70,7	125	12	10	22,2	32,2	19,5	11,2	0,475	6 300	FYC 30 TF
35	34	9	8	42,9	90	110	77,8	135	14	12	25,4	36,4	25,5	15,3	0,655	5 300	FYC 35 TF
40	36	9	10	49,2	100	120	84,9	145	14	12	30,2	41,2	30,7	19	0,8	4 800	FYC 40 TF
45	38	14	12	49,2	105	132	93,3	160	16	14	30,2	40,2	33,2	21,6	0,915	4 300	FYC 45 TF
50	40	14	12	51,6	110	138	97,6	165	16	14	32,6	42,6	35,1	23,2	0,98	4 000	FYC 50 TF
55	43	15	12	55,6	125	150	106,1	185	19	16	33,4	46,4	43,6	29	1,25	3 600	FYC 55 TF
60	48	15	12	65,1	135	160	113,1	195	19	16	39,7	56,7	52,7	36	1,53	3 400	FYC 60 TF
65	50	15	14	68,3	145	170	120,2	205	19	16	42,9	58,9	55,9	40	1,7	3 000	FYC 65 TF

Designations Bearing unit	Separate components Housing	Mass Bearing unit
–		kg
FYC 20 TF	FYC 504	YAR 204-2F
FYC 25 TF	FYC 505	YAR 205-2F
FYC 30 TF	FYC 506	YAR 206-2F
FYC 35 TF	FYC 507	YAR 207-2F
FYC 40 TF	FYC 508	YAR 208-2F
FYC 45 TF	FYC 509	YAR 209-2F
FYC 50 TF	FYC 510	YAR 210-2F
FYC 55 TF	FYC 511	YAR 211-2F
FYC 60 TF	FYC 512	YAR 212-2F
FYC 65 TF	FYC 513	YAR 213-2F

**Flanged Y-bearing units with a pressed steel housing and grub screws, metric shafts
d 12 – 25 mm**

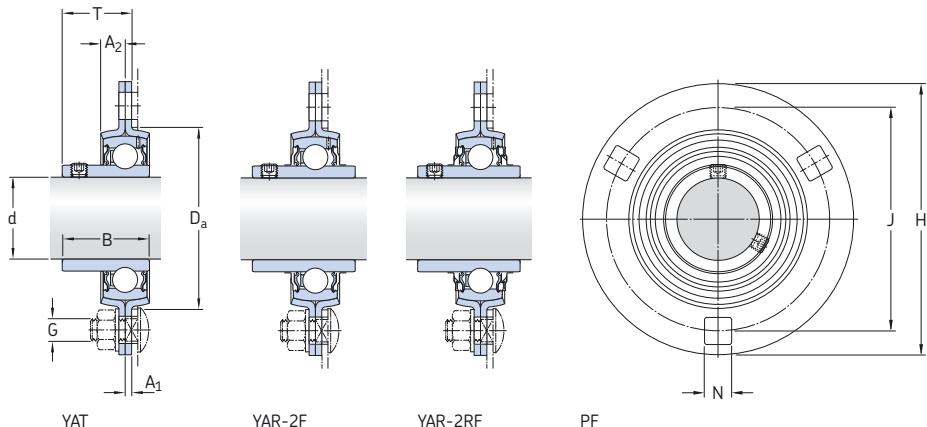

Dimensions											Basic load ratings dynamic C	static C ₀	Fatigue load limit P _u	Permissible housing load radial	Designation Bearing unit No order designation			
d	A ₁	A ₂	B	D _a	H	H _{1/L}	J	N	G	T								
mm															kN	kN	kN	–
12	2	7	27,4	49	81	–	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PF 12 TF			
	2	7	27,4	49	81	29	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PFD 12 TF			
	2	7	27,4	49	81	59	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PFT 12 TF			
15	2	7	27,4	49	81	–	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PF 15 TF			
	2	7	27,4	49	81	29	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PFD 15 TF			
	2	7	27,4	49	81	59	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PFT 15 TF			
17	2	7	22,1	49	81	–	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PF 17 RM			
	2	7	27,4	49	81	–	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PF 17 TF			
	2	7	22,1	49	81	29	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PFD 17 RM			
	2	7	27,4	49	81	29	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PFD 17 TF			
	2	7	22,1	49	81	59	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PFT 17 RM			
	2	7	27,4	49	81	59	63	7,1	6	17,9	9,56	4,75	0,2	2,5	PFT 17 TF			
20	2	8	25,5	55	91	–	71,5	8,7	8	20,3	12,7	6,55	0,28	3,3	PF 20 RM			
	2	8	31	55	91	–	71,5	8,7	8	20,3	12,7	6,55	0,28	3,3	PF 20 TF			
	2	8	31	55	91	–	71,5	8,7	8	20,3	12,7	6,55	0,28	3,3	PF 20 TR			
	2	8	25,5	55	91	32	71,5	8,7	8	20,3	12,7	6,55	0,28	3,3	PFD 20 RM			
	2	8	31	55	91	32	71,5	8,7	8	20,3	12,7	6,55	0,28	3,3	PFD 20 TF			
	2	8	25,5	55	91	32	71,5	8,7	8	20,3	12,7	6,55	0,28	3,3	PFD 20 TR			
	2	8	31	55	91	67	71,5	8,7	8	20,3	12,7	6,55	0,28	3,3	PFT 20 RM			
	2	8	31	55	91	67	71,5	8,7	8	20,3	12,7	6,55	0,28	3,3	PFT 20 TF			
	2	8	31	55	91	67	71,5	8,7	8	20,3	12,7	6,55	0,28	3,3	PFT 20 TR			
	2	9	27,2	60	95	–	76	8,7	8	21,5	14	7,8	0,335	3,6	PF 25 RM			
25	2	9	34,1	60	95	–	76	8,7	8	21,8	14	7,8	0,335	3,6	PF 25 TF			
	2	9	34,1	60	95	–	76	8,7	8	21,8	14	7,8	0,335	3,6	PF 25 TR			
	2	9	27,2	60	95	34	76	8,7	8	21,5	14	7,8	0,335	3,6	PFD 25 RM			
	2	9	34,1	60	95	34	76	8,7	8	21,8	14	7,8	0,335	3,6	PFD 25 TF			
	2	9	27,2	60	95	71	76	8,7	8	21,5	14	7,8	0,335	3,6	PFT 25 RM			
	2	9	34,1	60	95	71	76	8,7	8	21,8	14	7,8	0,335	3,6	PFT 25 TF			
	2	9	34,1	60	95	71	76	8,7	8	21,8	14	7,8	0,335	3,6	PFT 25 TR			

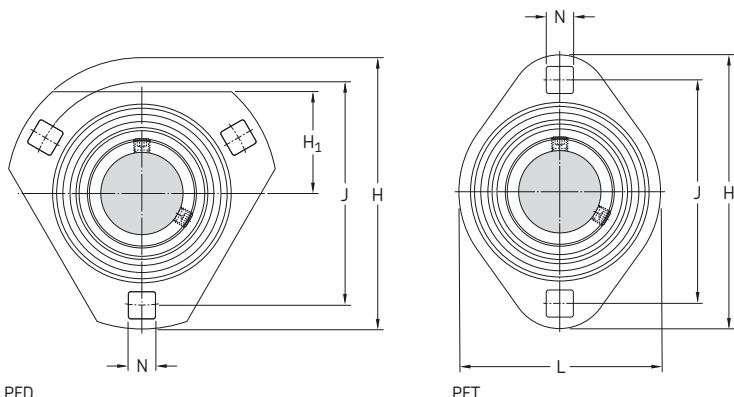


PFD

PFT


Designation Bearing unit No order designation	Order designations Housing	Bearing	Mass Bearing unit
-	-		kg
PF 12 TF	PF 40	YAR 203/12-2F	0,26
PFD 12 TF	PFD 40	YAR 203/12-2F	0,19
PFT 12 TF	PFT 40	YAR 203/12-2F	0,19
PF 15 TF	PF 40	YAR 203/15-2F	0,25
PFD 15 TF	PFD 40	YAR 203/15-2F	0,18
PFT 15 TF	PFT 40	YAR 203/15-2F	0,18
PF 17 RM	PF 40	YAT 203	0,22
PF 17 TF	PF 40	YAR 203-2F	0,24
PFD 17 RM	PFD 40	YAT 203	0,16
PFD 17 TF	PFD 40	YAR 203-2F	0,17
PFT 17 RM	PFT 40	YAT 203	0,16
PFT 17 TF	PFT 40	YAR 203-2F	0,17
PF 20 RM	PF 47	YAT 204	0,29
PF 20 TF	PF 47	YAR 204-2F	0,32
PF 20 TR	PF 47	YAR 204-2RF	0,32
PFD 20 RM	PFD 47	YAT 204	0,23
PFD 20 TF	PFD 47	YAR 204-2F	0,26
PFD 20 TR	PFD 47	YAR 204-2RF	0,26
PFT 20 RM	PFT 47	YAT 204	0,20
PFT 20 TF	PFT 47	YAR 204-2F	0,23
PFT 20 TR	PFT 47	YAR 204-2RF	0,23
PF 25 RM	PF 52	YAT 205	0,33
PF 25 TF	PF 52	YAR 205-2F	0,36
PF 25 TR	PF 52	YAR 205-2RF	0,36
PFD 25 RM	PFD 52	YAT 205	0,30
PFD 25 TF	PFD 52	YAR 205-2F	0,33
PFD 25 TR	PFD 52	YAR 205-2RF	0,33
PFT 25 RM	PFT 52	YAT 205	0,25
PFT 25 TF	PFT 52	YAR 205-2F	0,28
PFT 25 TR	PFT 52	YAR 205-2RF	0,28

**Flanged Y-bearing units with a pressed steel housing and grub screws, metric shafts
d 30 – 50 mm**

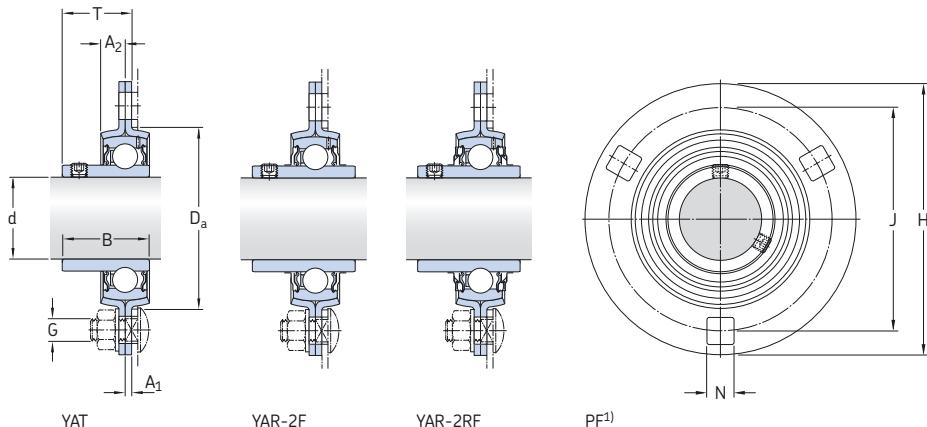

Dimensions	d	A ₁	A ₂	B	D _a	H	H ₁ /L	J	N	G	T	Basic load ratings		Fatigue load limit P _u	Permissible housing load radial	Designation Bearing unit No order designation
												dynamic C	static C ₀			
	mm											kN	kN	kN	–	
30	2,5	9,5	30,2	71	112	–	90,5	10,5	10	23,5	19,5	11,2	0,475	5	PF 30 RM	
	2,5	9,5	38,1	71	112	–	90,5	10,5	10	24,7	19,5	11,2	0,475	5	PF 30 TF	
	2,5	9,5	38,1	71	112	–	90,5	10,5	10	24,7	19,5	11,2	0,475	5	PF 30 TR	
	2,5	9,5	30,2	71	112	38	90,5	10,5	10	23,5	19,5	11,2	0,475	5	PFD 30 RM	
	2,5	9,5	38,1	71	112	38	90,5	10,5	10	24,7	19,5	11,2	0,475	5	PFD 30 TF	
	2,5	9,5	38,1	71	112	38	90,5	10,5	10	24,7	19,5	11,2	0,475	5	PFD 30 TR	
	2,5	9,5	30,2	71	112	84	90,5	10,5	10	23,5	19,5	11,2	0,475	5	PFT 30 RM	
	2,5	9,5	38,1	71	112	84	90,5	10,5	10	24,7	19,5	11,2	0,475	5	PFT 30 TF	
	2,5	9,5	38,1	71	112	84	90,5	10,5	10	24,7	19,5	11,2	0,475	5	PFT 30 TR	
35	2,5	10	33	81	122	–	100	11	10	25,8	25,5	15,3	0,655	6,5	PF 35 RM	
	2,5	10	42,9	81	122	–	100	11	10	27,9	25,5	15,3	0,655	6,5	PF 35 TF	
	2,5	10	42,9	81	122	–	100	11	10	27,9	25,5	15,3	0,655	6,5	PF 35 TR	
	2,5	10	33	81	122	45	100	11	10	25,8	25,5	15,3	0,655	6,5	PFD 35 RM	
	2,5	10	42,9	81	122	45	100	11	10	27,9	25,5	15,3	0,655	6,5	PFD 35 TF	
	2,5	10	42,9	81	122	45	100	11	10	27,9	25,5	15,3	0,655	6,5	PFD 35 TR	
	2,5	10	33	81	122	94	100	11	10	25,8	25,5	15,3	0,655	6,5	PFT 35 RM	
	2,5	10	42,9	81	122	94	100	11	10	27,9	25,5	15,3	0,655	6,5	PFT 35 TF	
	2,5	10	42,9	81	122	94	100	11	10	27,9	25,5	15,3	0,655	6,5	PFT 35 TR	
40	3,5	10	36	91	148	–	119	13,5	12	28,8	30,7	19	0,8	7,5	PF 40 RM	
	3,5	10	49,2	91	148	–	119	13,5	12	33,7	30,7	19	0,8	7,5	PF 40 TF	
	3,5	10	49,2	91	148	–	119	13,5	12	33,7	30,7	19	0,8	7,5	PF 40 TR	
	3,5	10	36	91	148	53	119	13,5	12	28,8	30,7	19	0,8	7,5	PFD 40 RM	
	3,5	10	49,2	91	148	53	119	13,5	12	33,7	30,7	19	0,8	7,5	PFD 40 TF	
	3,5	10	49,2	91	148	53	119	13,5	12	33,7	30,7	19	0,8	7,5	PFD 40 TR	
	3,5	10	36	91	148	104	119	13,5	12	28,8	30,7	19	0,8	7,5	PFT 40 RM	
	3,5	10	49,2	91	148	104	119	13,5	12	33,7	30,7	19	0,8	7,5	PFT 40 TF	
	3,5	10	49,2	91	148	104	119	13,5	12	33,7	30,7	19	0,8	7,5	PFT 40 TR	
45	3,5	10,5	37	97	149	–	120,6	13,5	12	29,3	33,2	21,6	0,915	8,3	PF 45 RM	
	3,5	10,5	49,2	97	149	–	120,6	13,5	12	33,7	33,2	21,6	0,915	8,3	PF 45 TF	
	3,5	10,5	49,2	97	149	–	120,6	13,5	12	33,7	33,2	21,6	0,915	8,3	PF 45 TR	
50	4	11	38,9	102	155	–	127	13,5	12	31,6	35,1	23,2	0,98	9	PF 50 RM	
	4	11	51,6	102	155	–	127	13,5	12	36,6	35,1	23,2	0,98	9	PF 50 TF	
	4	11	51,6	102	155	–	127	13,5	12	36,6	35,1	23,2	0,98	9	PF 50 TR	

¹⁾ Housings PF 80, PF 85 and PF 90 have four attachment bolt holes.

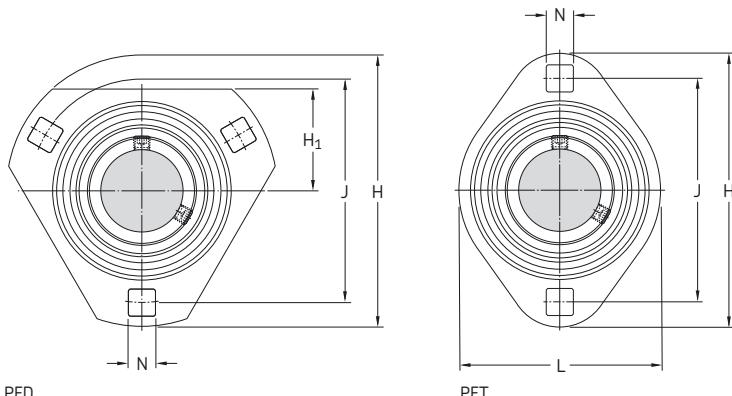


PFD


PFT

Designation Bearing unit No order designation	Order designations Housing	Bearing	Mass Bearing unit
-	-		kg
PF 30 RM	PF 62	YAT 206	0,53
PF 30 TF	PF 62	YAR 206-2F	0,58
PF 30 TR	PF 62	YAR 206-2RF	0,58
PFD 30 RM	PFD 62	YAT 206	0,42
PFD 30 TF	PFD 62	YAR 206-2F	0,47
PFD 30 TR	PFD 62	YAR 206-2RF	0,47
PFT 30 RM	PFT 62	YAT 206	0,41
PFT 30 TF	PFT 62	YAR 206-2F	0,46
PFT 30 TR	PFT 62	YAR 206-2RF	0,46
PF 35 RM	PF 72	YAT 207	0,67
PF 35 TF	PF 72	YAR 207-2F	0,77
PF 35 TR	PF 72	YAR 207-2RF	0,77
PFD 35 RM	PFD 72	YAT 207	0,54
PFD 35 TF	PFD 72	YAR 207-2F	0,64
PFD 35 TR	PFD 72	YAR 207-2RF	0,64
PFT 35 RM	PFT 72	YAT 207	0,55
PFT 35 TF	PFT 72	YAR 207-2F	0,65
PFT 35 TR	PFT 72	YAR 207-2RF	0,65
PF 40 RM	PF 80	YAT 208	1,20
PF 40 TF	PF 80	YAR 208-2F	1,30
PF 40 TR	PF 80	YAR 208-2RF	1,30
PFD 40 RM	PFD 80	YAT 208	0,90
PFD 40 TF	PFD 80	YAR 208-2F	1,00
PFD 40 TR	PFD 80	YAR 208-2RF	1,00
PFT 40 RM	PFT 80	YAT 208	0,78
PFT 40 TF	PFT 80	YAR 208-2F	0,90
PFT 40 TR	PFT 80	YAR 208-2RF	0,90
PF 45 RM	PF 85	YAT 209	1,25
PF 45 TF	PF 85	YAR 209-2F	1,35
PF 45 TR	PF 85	YAR 209-2RF	1,35
PF 50 RM	PF 90	YAT 210	1,40
PF 50 TF	PF 90	YAR 210-2F	1,55
PF 50 TR	PF 90	YAR 210-2RF	1,55

Flanged Y-bearing units with a pressed steel housing and grub screws, inch shafts
d 5/8 – 1 1/4 in

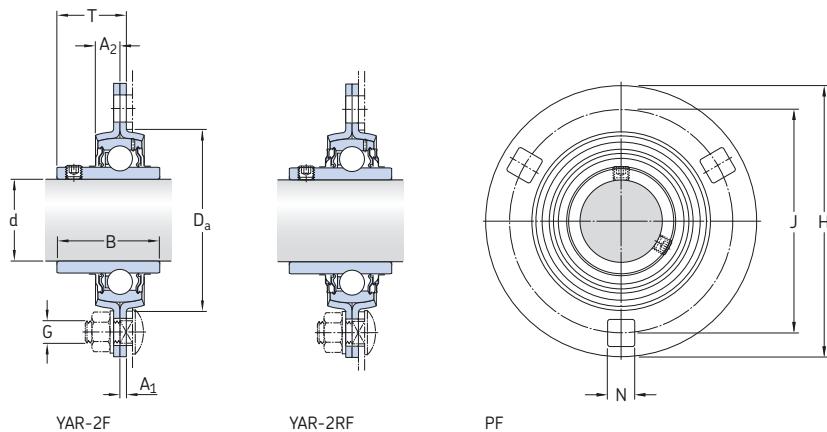


Dimensions											Designation Bearing unit No order designation
d	A ₁	A ₂	B	D _a	H	H _{1/L}	J	N	G	T	
in/mm											–
5/8 15,875	0.08 2	0.28 7	1.08 27,4	1.93 49	3.19 81	–	2.48 63	0.28 7,1	1/4 6	0.70 17,9	PF 5/8 TF
3/4 19,05	0.08 2	0.32 8	1.22 31	2.17 55	3.58 91	–	2.82 71,5	0.34 8,7	5/16 8	0.80 20,3	PF 3/4 TF
	0.08 2	0.32 8	1.22 31	2.17 55	3.58 91	–	2.82 71,5	0.34 8,7	5/16 8	0.80 20,3	PF 3/4 TR
	0.08 2	0.32 8	1.22 31	2.17 55	3.58 91	–	2.82 71,5	0.34 8,7	5/16 8	0.80 20,3	PFD 3/4 TF
	0.08 2	0.32 8	1.22 31	2.17 55	3.58 91	–	2.82 71,5	0.34 8,7	5/16 8	0.80 20,3	PFD 3/4 TR
	0.08 2	0.32 8	1.22 31	2.17 55	3.58 91	–	2.82 71,5	0.34 8,7	5/16 8	0.80 20,3	PFT 3/4 TF
	0.08 2	0.32 8	1.22 31	2.17 55	3.58 91	–	2.82 71,5	0.34 8,7	5/16 8	0.80 20,3	PFT 3/4 TR
1 25,4	0.08 2	0.35 9	1.34 34,1	2.36 60	3.74 95	–	2.99 76	0.34 8,7	5/16 8	0.86 21,8	PF 1. TF
	0.08 2	0.35 9	1.34 34,1	2.36 60	3.74 95	–	2.99 76	0.34 8,7	5/16 8	0.86 21,8	PF 1. TR
	0.08 2	0.35 9	1.34 34,1	2.36 60	3.74 95	–	2.99 76	0.34 8,7	5/16 8	0.86 21,8	PFD 1. TF
	0.08 2	0.35 9	1.34 34,1	2.36 60	3.74 95	–	2.99 76	0.34 8,7	5/16 8	0.86 21,8	PFD 1. TR
	0.08 2	0.35 9	1.34 34,1	2.36 60	3.74 95	–	2.99 76	0.34 8,7	5/16 8	0.86 21,8	PFT 1. TF
	0.08 2	0.35 9	1.34 34,1	2.36 60	3.74 95	–	2.99 76	0.34 8,7	5/16 8	0.86 21,8	PFT 1. TR
1 1/4 31,75	0.10 2,5	0.39 10	1.69 42,9	3.19 81	4.80 122	–	3.94 100	0.43 11	3/8 10	1.10 27,9	PF 1.1/4 TF
	0.10 2,5	0.39 10	1.69 42,9	3.19 81	4.80 122	–	3.94 100	0.43 11	3/8 10	1.10 27,9	PF 1.1/4 TR
	0.10 2,5	0.39 10	1.69 42,9	3.19 81	4.80 122	–	3.94 100	0.43 11	3/8 10	1.10 27,9	PFD 1.1/4 TF
	0.10 2,5	0.39 10	1.69 42,9	3.19 81	4.80 122	–	3.94 100	0.43 11	3/8 10	1.10 27,9	PFD 1.1/4 TR
	0.10 2,5	0.39 10	1.69 42,9	3.19 81	4.80 122	–	3.94 100	0.43 11	3/8 10	1.10 27,9	PFT 1.1/4 TF
	0.10 2,5	0.39 10	1.69 42,9	3.19 81	4.80 122	–	3.94 100	0.43 11	3/8 10	1.10 27,9	PFT 1.1/4 TR
	0.10 2,5	0.39 10	1.69 42,9	3.19 81	4.80 122	–	3.94 100	0.43 11	3/8 10	1.10 27,9	PFT 1.1/4 TR

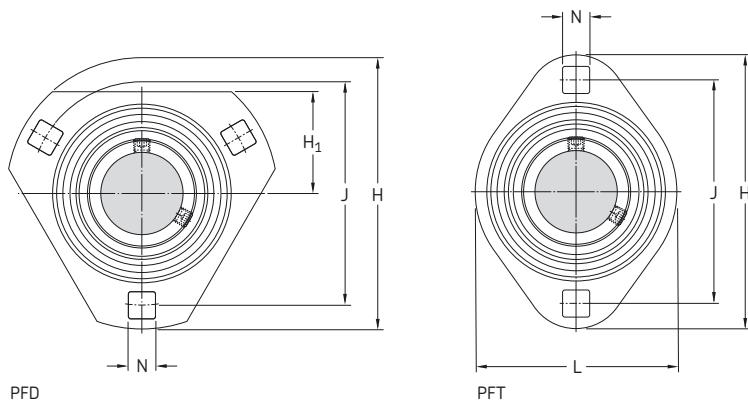


Designation Bearing unit No order designation	Order designations Housing	Bearing	Basic load ratings dynamic C	static C_0	Fatigue load limit P_u	Permissible housing load radial	Mass Bearing unit
			lbf/kN		lbf/kN	lbf/kN	lb/kg
PF 5/8 TF	PF 40	YAR 203-010-2F	2 150 9,56	1 070 4,75	50 0,2	560 2,5	0,49 0,22
PF 3/4 TF	PF 47	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	740 3,3	0,66 0,30
PF 3/4 TR	PF 47	YAR 204-012-2RF	2 860 12,7	1 470 6,55	60 0,28	740 3,3	0,66 0,30
PFD 3/4 TF	PFD 47	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	740 3,3	0,53 0,24
PFD 3/4 TR	PFD 47	YAR 204-012-2RF	2 860 12,7	1 470 6,55	60 0,28	740 3,3	0,53 0,24
PFT 3/4 TF	PFT 47	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	740 3,3	0,53 0,24
PFT 3/4 TR	PFT 47	YAR 204-012-2RF	2 860 12,7	1 470 6,55	60 0,28	740 3,3	0,53 0,24
PF 1.TF	PF 52	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	810 3,6	0,77 0,35
PF 1.TR	PF 52	YAR 205-100-2RF	3 150 14	1 760 7,8	80 0,335	810 3,6	0,77 0,35
PFD 1.TF	PFD 52	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	810 3,6	0,64 0,29
PFD 1.TR	PFD 52	YAR 205-100-2RF	3 150 14	1 760 7,8	80 0,335	810 3,6	0,64 0,29
PFT 1.TF	PFT 52	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	810 3,6	0,62 0,28
PFT 1.TR	PFT 52	YAR 205-100-2RF	3 150 14	1 760 7,8	80 0,335	810 3,6	0,62 0,28
PF 1.1/4 TF	PF 72	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	1 460 6,5	1,85 0,83
PF 1.1/4 TR	PF 72	YAR 207-104-2RF	5 740 25,5	3 440 15,3	150 0,655	1 460 6,5	1,85 0,83
PFD 1.1/4 TF	PFD 72	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	1 460 6,5	1,50 0,69
PFD 1.1/4 TR	PFD 72	YAR 207-104-2RF	5 740 25,5	3 440 15,3	150 0,655	1 460 6,5	1,50 0,69
PFT 1.1/4 TF	PFT 72	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	1 460 6,5	1,50 0,69
PFT 1.1/4 TR	PFT 72	YAR 207-104-2RF	5 740 25,5	3 440 15,3	150 0,655	1 460 6,5	1,50 0,69

**Flanged Y-bearing units with a pressed steel housing and grub screws, inch shafts
d 1 1/2 – 1 3/4 in**

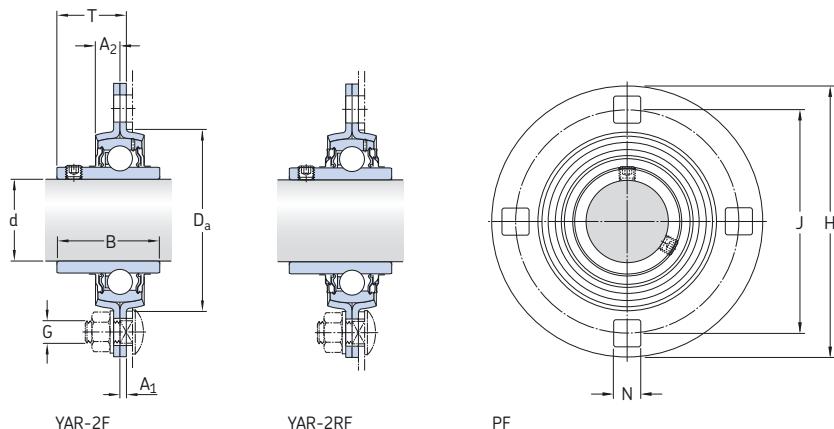

Dimensions


												Designation
												Bearing unit No order designation
d	A ₁	A ₂	B	D _a	H	H ₁ /L	J	N	G	T		
in/mm												–
1 1/2	0.14	0.39	1.94	3.58	5.83	–	4.69	0.53	1/2	1.33		PF 1.1/2 TF
38,1	3.5	10	49.2	91	148	–	119	13,5	12	33,7		
	0.14	0.39	1.94	3.58	5.83	–	4.69	0.53	1/2	1.33		PF 1.1/2 TR
	3.5	10	49.2	91	148	–	119	13,5	12	33,7		
	0.14	0.39	1.94	3.58	5.83	2.09	4.69	0.53	1/2	1.33		PFD 1.1/2 TF
	3.5	10	49.2	91	148	53	119	13,5	12	33,7		
	0.14	0.39	1.94	3.58	5.83	2.09	4.69	0.53	1/2	1.33		PFD 1.1/2 TR
	3.5	10	49.2	91	148	53	119	13,5	12	33,7		
	0.14	0.39	1.94	3.58	5.83	4.09	4.69	0.53	1/2	1.33		PFT 1.1/2 TF
	3.5	10	49.2	91	148	104	119	13,5	12	33,7		
	0.14	0.39	1.94	3.58	5.83	4.09	4.69	0.53	1/2	1.33		PFT 1.1/2 TR
	3.5	10	49.2	91	148	104	119	13,5	12	33,7		
1 3/4	0.14	0.41	1.94	3.82	5.87	–	4.75	0.53	1/2	1.33		PF 1.3/4 TF
44,45	3.5	10,5	49.2	97	149	–	120,6	13,5	12	33,7		
	0.14	0.41	1.94	3.82	5.87	–	4.75	0.53	1/2	1.33		PF 1.3/4 TR
	3,5	10,5	49,2	97	149	–	120,6	13,5	12	33,7		

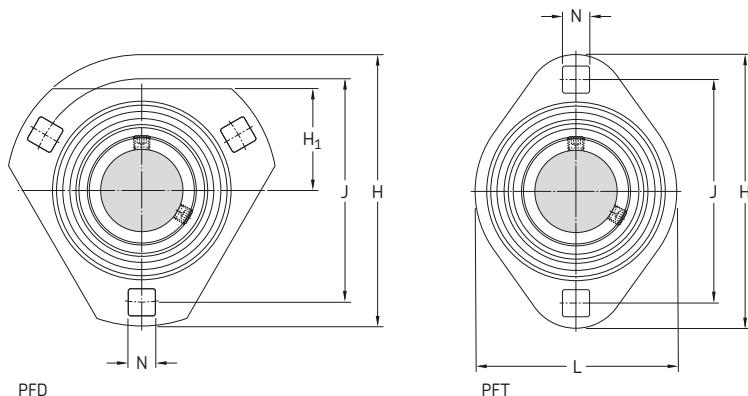


Designation Bearing unit No order designation	Order designations Housing	Bearing	Basic load ratings dynamic C	static C_0	Fatigue load limit P_u	Permissible housing load radial	Mass Bearing unit
			lbf/kN		lbf/kN	lbf/kN	lb/kg
PF 1.1/2 TF	PF 80	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	1 690 7,5	1,80 0,81
PF 1.1/2 TR	PF 80	YAR 208-108-2RF	6 910 30,7	4 280 19	180 0,8	1 690 7,5	1,80 0,81
PFD 1.1/2 TF	PFD 80	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	1 690 7,5	2,35 1,05
PFD 1.1/2 TR	PFD 80	YAR 208-108-2RF	6 910 30,7	4 280 19	180 0,8	1 690 7,5	2,35 1,05
PFT 1.1/2 TF	PFT 80	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	1 690 7,5	2,10 0,95
PFT 1.1/2 TR	PFT 80	YAR 208-108-2RF	6 910 30,7	4 280 19	180 0,8	1 690 7,5	2,10 0,95
PF 1.3/4 TF	PF 85	YAR 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	1 870 8,3	2,75 1,25
PF 1.3/4 TR	PF 85	YAR 209-112-2RF	7 470 33,2	4 860 21,6	210 0,915	1 870 8,3	2,75 1,25

**Flanged Y-bearing units with a pressed steel housing and an eccentric locking collar,
metric shafts**

d 15 – 35 mm

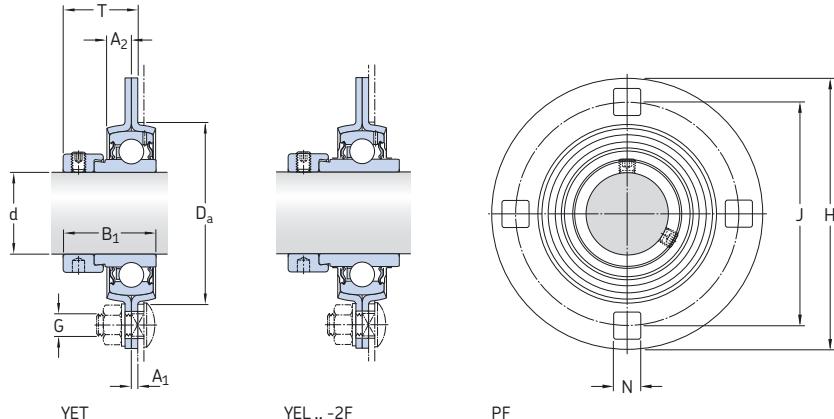

Dimensions										Basic load ratings dynamic C	static C ₀	Fatigue load limit P _u	Permissible housing load radial	Designation Bearing unit No order designation
d	A ₁	A ₂	B ₁	D _a	H	H ₁ /L	J	N	G	T				
mm										kN	kN	kN	–	
15	2	7	28,6	49	81	–	63	7,1	6	24,1	9,56	4,75	0,2	PF 15 FM
	2	7	28,6	49	81	29	63	7,1	6	24,1	9,56	4,75	0,2	PFD 15 FM
	2	7	28,6	49	81	59	63	7,1	6	24,1	9,56	4,75	0,2	PFT 15 FM
17	2	7	28,6	49	81	–	63	7,1	6	24,1	9,56	4,75	0,2	PF 17 FM
	2	7	28,6	49	81	29	63	7,1	6	24,1	9,56	4,75	0,2	PFD 17 FM
	2	7	28,6	49	81	59	63	7,1	6	24,1	9,56	4,75	0,2	PFT 17 FM
20	2	8	31	55	91	–	71,5	8,7	8	25,5	12,7	6,55	0,28	PF 20 FM
	2	8	43,7	55	91	–	71,5	8,7	8	28,6	12,7	6,55	0,28	PF 20 WF
	2	8	31	55	91	32	71,5	8,7	8	25,5	12,7	6,55	0,28	PFD 20 FM
	2	8	43,7	55	91	32	71,5	8,7	8	28,6	12,7	6,55	0,28	PFD 20 WF
	2	8	31	55	91	67	71,5	8,7	8	25,5	12,7	6,55	0,28	PFT 20 FM
	2	8	43,4	55	91	67	71,5	8,7	8	28,6	12,7	6,55	0,28	PFT 20 WF
25	2	9	31	60	95	–	76	8,7	8	25,5	14	7,8	0,335	PF 25 FM
	2	9	44,4	60	95	–	76	8,7	8	28,9	14	7,8	0,335	PF 25 WF
	2	9	31	60	95	34	76	8,7	8	25,5	14	7,8	0,335	PFD 25 FM
	2	9	44,4	60	95	34	76	8,7	8	28,9	14	7,8	0,335	PFD 25 WF
	2	9	31	60	95	71	76	8,7	8	25,5	14	7,8	0,335	PFT 25 FM
	2	9	44,4	60	95	71	76	8,7	8	28,9	14	7,8	0,335	PFT 25 WF
30	2,5	9,5	35,7	71	112	–	90,5	10,5	10	29,2	19,5	11,2	0,475	PF 30 FM
	2,5	9,5	48,4	71	112	–	90,5	10,5	10	32,6	19,5	11,2	0,475	PF 30 WF
	2,5	9,5	35,7	71	112	38	90,5	10,5	10	29,2	19,5	11,2	0,475	PFD 30 FM
	2,5	9,5	48,4	71	112	38	90,5	10,5	10	32,6	19,5	11,2	0,475	PFD 30 WF
	2,5	9,5	35,7	71	112	84	90,5	10,5	10	29,2	19,5	11,2	0,475	PFT 30 FM
	2,5	9,5	48,4	71	112	84	90,5	10,5	10	32,6	19,5	11,2	0,475	PFT 30 WF
35	2,5	10	38,9	81	122	–	100	11	10	31,9	25,5	15,3	0,655	PF 35 FM
	2,5	10	51,1	81	122	–	100	11	10	34,8	25,5	15,3	0,655	PF 35 WF
	2,5	10	38,9	81	122	45	100	11	10	31,9	25,5	15,3	0,655	PFD 35 FM
	2,5	10	51,1	81	122	45	100	11	10	34,8	25,5	15,3	0,655	PFD 35 WF
	2,5	10	38,9	81	122	94	100	11	10	31,9	25,5	15,3	0,655	PFT 35 FM
	2,5	10	51,1	81	122	94	100	11	10	34,8	25,5	15,3	0,655	PFT 35 WF

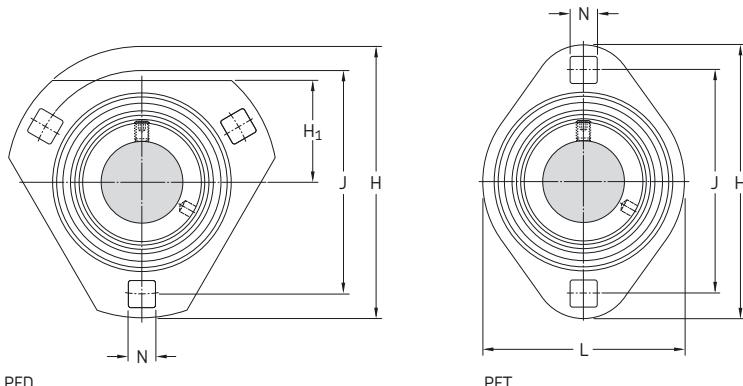


PFD

PFT


Designation Bearing unit No order designation	Order designations Housing	Bearing	Mass Bearing unit
			kg
PF 15 FM	PF 40	YET 203/15	0,24
PFD 15 FM	PFD 40	YET 203/15	0,21
PFT 15 FM	PFT 40	YET 203/15	0,21
PF 17 FM	PF 40	YET 203	0,22
PFD 17 FM	PFD 40	YET 203	0,20
PFT 17 FM	PFT 40	YET 203	0,19
PF 20 FM	PF 47	YET 204	0,30
PF 20 WF	PF 47	YEL 204-2F	0,33
PFD 20 FM	PFD 47	YET 204	0,26
PFD 20 WF	PFD 47	YEL 204-2F	0,29
PFT 20 FM	PFT 47	YET 204	0,25
PFT 20 WF	PFT 47	YEL 204-2F	0,28
PF 25 FM	PF 52	YET 205	0,35
PF 25 WF	PF 52	YEL 205-2F	0,40
PFD 25 FM	PFD 52	YET 205	0,30
PFD 25 WF	PFD 52	YEL 205-2F	0,35
PFT 25 FM	PFT 52	YET 205	0,29
PFT 25 WF	PFT 52	YEL 205-2F	0,34
PF 30 FM	PF 62	YET 206	0,56
PF 30 WF	PF 62	YEL 206-2F	0,62
PFD 30 FM	PFD 62	YET 206	0,48
PFD 30 WF	PFD 62	YEL 206-2F	0,54
PFT 30 FM	PFT 62	YET 206	0,46
PFT 30 WF	PFT 62	YEL 206-2F	0,52
PF 35 FM	PF 72	YET 207	0,70
PF 35 WF	PF 72	YEL 207-2F	0,78
PFD 35 FM	PFD 72	YET 207	0,66
PFD 35 WF	PFD 72	YEL 207-2F	0,74
PFT 35 FM	PFT 72	YET 207	0,72
PFT 35 WF	PFT 72	YEL 207-2F	0,80

**Flanged Y-bearing units with a pressed steel housing and an eccentric locking collar,
metric shafts**

d 40 – 50 mm

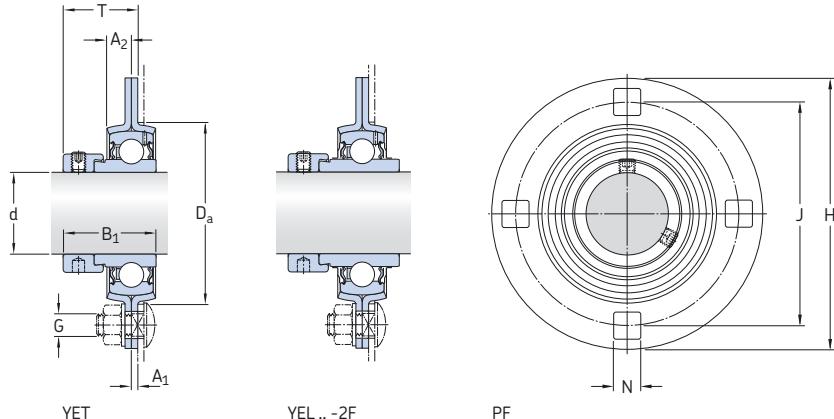

Dimensions										Basic load ratings dynamic C	static C ₀	Fatigue load limit P _u	Permissible housing load radial	Designation Bearing unit No order designation	
d	A ₁	A ₂	B ₁	D _a	H	H ₁ /L	J	N	G	T					
mm											kN		kN	–	
40	3,5	10	43,7	91	148	–	119	13,5	12	36,2	30,7	19	0,8	7,5	PF 40 FM
	3,5	10	56,3	91	148	–	119	13,5	12	38,4	30,7	19	0,8	7,5	PF 40 WF
	3,5	10	43,7	91	148	53	119	13,5	12	36,2	30,7	19	0,8	7,5	PFD 40 FM
	3,5	10	56,3	91	148	53	119	13,5	12	38,4	30,7	19	0,8	7,5	PFD 40 WF
	3,5	10	43,7	91	148	104	119	13,5	12	36,2	30,7	19	0,8	7,5	PFT 40 FM
	3,5	10	56,3	91	148	104	119	13,5	12	38,4	30,7	19	0,8	7,5	PFT 40 WF
45	3,5	10,5	43,7	97	149	–	120,6	13,5	12	36,2	33,2	21,6	0,915	8,3	PF 45 FM
	3,5	10,5	56,3	97	149	–	120,6	13,5	12	38,4	33,2	21,6	0,915	8,3	PF 45 WF
50	4	11	43,7	102	155	–	127	13,5	12	36,7	35,1	23,2	0,98	9	PF 50 FM
	4	11	62,7	102	155	–	127	13,5	12	42,1	35,1	23,2	0,98	9	PF 50 WF

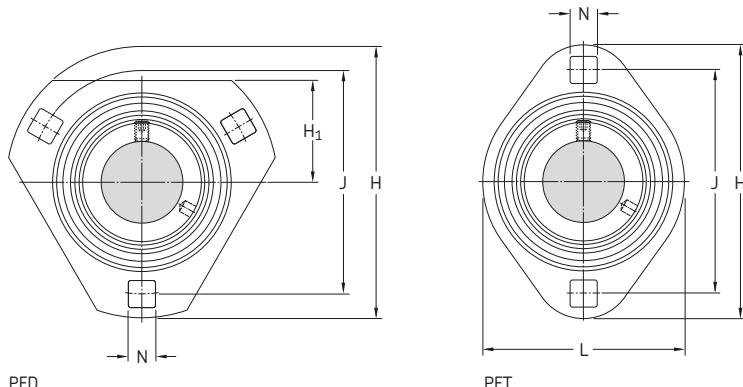


Designation	Order designations		Mass
Bearing unit	Housing	Bearing	Bearing unit
No order designation	-	-	-

			kg
PF 40 FM	PF 80	YET 208	1,20
PF 40 WF	PF 80	YEL 208-2F	1,30
PFD 40 FM	PFD 80	YET 208	1,05
PFD 40 WF	PFD 80	YEL 208-2F	1,15
PFT 40 FM	PFT 80	YET 208	0,94
PFT 40 WF	PFT 80	YEL 208-2F	1,00
PF 45 FM	PF 85	YET 209	1,30
PF 45 WF	PF 85	YEL 209-2F	1,40
PF 50 FM	PF 90	YET 210	1,50
PF 50 WF	PF 90	YEL 210-2F	1,65

**Flanged Y-bearing units with a pressed steel housing and an eccentric locking collar,
inch shafts**

d $\frac{3}{4}$ – $1\frac{1}{2}$ in

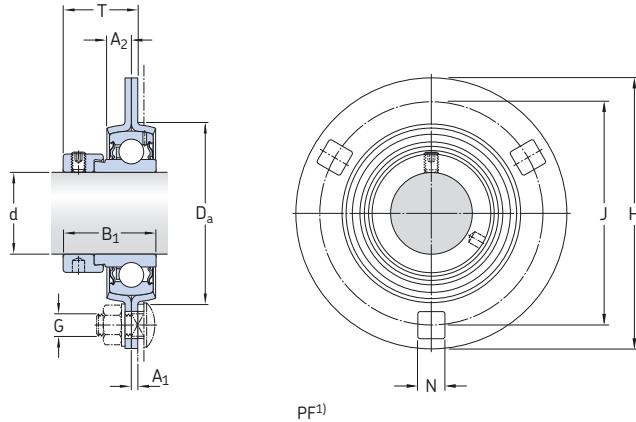


PF¹⁾

Dimensions

												Designation
												Bearing unit No order designation
in/mm												
$\frac{3}{4}$ 19,05	0.08 2	0.31 31	1.22 55	2.17 91	3.58 –	–	2.81 71,5	0.34 8,7	$\frac{5}{16}$ 8	1.00 25,5		PF 3/4 FM
	0.08 2	0.31 31	1.22 55	2.17 91	3.58 32	1.26 71,5	2.81 8,7	0.34 8	$\frac{5}{16}$ 8	1.00 25,5		PFD 3/4 FM
	0.08 2	0.31 31	1.22 55	2.17 91	3.58 67	2.64 71,5	2.81 8,7	0.34 8	$\frac{5}{16}$ 8	1.00 25,5		PFT 3/4 FM
1 25,4	0.08 2	0.35 9	1.22 31	2.36 60	3.74 95	–	2.99 76	0.34 8,7	$\frac{5}{16}$ 8	1.00 25,5		PF 1. FM
	0.08 2	0.35 9	1.22 31	2.36 60	3.74 95	1.34 34	2.99 76	0.34 8,7	$\frac{5}{16}$ 8	1.00 25,5		PFD 1. FM
	0.08 2	0.35 9	1.22 31	2.36 60	3.74 95	2.8 71	2.99 76	0.34 8,7	$\frac{5}{16}$ 8	1.00 25,5		PFT 1. FM
$1\frac{1}{2}$ 38,1	0.14 3,5	0.39 10	1.72 43,7	3.58 91	5.83 148	–	4.69 119	0.53 13,5	$\frac{1}{2}$ 12	1.43 36,2		PF 1.1/2 FM
	0.14 3,5	0.39 10	1.72 43,7	3.58 91	5.83 148	2.09 53	4.69 119	0.53 13,5	$\frac{1}{2}$ 12	1.43 36,2		PFD 1.1/2 FM
	0.14 3,5	0.39 10	1.72 43,7	3.58 91	5.83 148	4.09 104	4.69 119	0.53 13,5	$\frac{1}{2}$ 12	1.43 36,2		PFT 1.1/2 FM

¹⁾ Housing PF 80 has four attachment bolt holes.

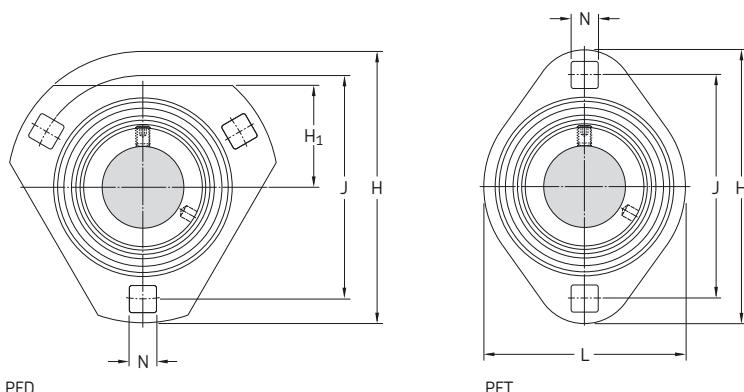

Designation Bearing unit No order designation	Order designations Housing	Bearing	Basic load ratings dynamic C	static C ₀	Fatigue load limit P _u	Permissible housing load radial	Mass Bearing unit
-	-		lbf/kN	lbf/kN	lbf/kN	lb/kg	
PF 3/4 FM	PF 47	YET 204-012	2 860 12,7	1 470 6,55	60 0,28	740 3,3	0,70 0,31
PFD 3/4 FM	PFD 47	YET 204-012	2 860 12,7	1 470 6,55	60 0,28	740 3,3	0,60 0,27
PFT 3/4 FM	PFT 47	YET 204-012	2 860 12,7	1 470 6,55	60 0,28	740 3,3	0,60 0,26
PF 1. FM	PF 52	YET 205-100	3 150 14	1 760 7,8	80 0,335	810 3,6	0,80 0,35
PFD 1. FM	PFD 52	YET 205-100	3 150 14	1 760 7,8	80 0,335	810 3,6	0,80 0,35
PFT 1. FM	PFT 52	YET 205-100	3 150 14	1 760 7,8	80 0,335	810 3,6	0,60 0,29
PF 1.1/2 FM	PF 80	YET 208-108	6 910 30,7	4 280 19	180 0,8	1 690 7,5	2,70 1,25
PFD 1.1/2 FM	PFD 80	YET 208-108	6 910 30,7	4 280 19	180 0,8	1 690 7,5	2,30 1,05
PFT 1.1/2 FM	PFT 80	YET 208-108	6 910 30,7	4 280 19	180 0,8	1 690 7,5	2,20 0,98



Y-bearing take-up units

Designs	236
Data – general	236
Dimensions.....	236
Tolerances	236
Radial internal clearance	237
Materials	237
Load carrying ability of the housings	237
End covers	237
Grease fills	237
Mounting	237
Product tables	238
5.1 Y-bearing take-up units with a cast housing and grub screws, metric shafts	238
inch shafts.....	240
5.2 Y-bearing take-up units with a cast housing and an eccentric locking collar, metric shafts	244

Designs

Y-bearing take-up units consist of a cast housing and an insert bearing (→ fig. 1). These units are typically mounted in take-up frames and connected by an adjustment screw. A grease fitting is provided in the housing for relubrication. Standard Y-bearing take-up units can be located on the shaft via the inner ring of the insert bearing with either:

- grub (set) screws
- an eccentric locking collar

The Y-bearing is sealed with either:

- the standard integral seal
- the standard integral seal and an additional flinger

For additional information about Y-bearings, refer to the section *Y-bearings*, starting on page 79.

Data – general

Dimensions

The boundary dimensions of SKF Y-bearing take-up housings in the:

- TU series are in accordance with ISO 3228:1993
- TUJ series are in accordance with JIS B 1559-1995

Tolerances

The tolerances (→ fig. 2), which are in accordance with ISO 3228:1993, are:


- $\pm 0,25$ mm for the distance between the guide surfaces H_1
- within the tolerance range H13 for the width of the guide surfaces A_1


Information about the tolerances of the inner ring bore diameter can be found in the section *Y-bearings* on page 89.

Fig. 1



Fig. 2





Radial internal clearance

The Y-bearing used in a Y-bearing take-up unit has the same radial internal clearance as a similarly sized individual Y-bearing. The values for radial internal clearance can be found in the section *Y-bearings* on page 90.

Materials

The housings for Y-bearing take-up units are manufactured from grey cast iron EN-GJL HB195 in accordance with EN 1561:1997.

Load carrying ability of the housings

Cast housings can withstand the same dynamic and static loads as their insert bearings. Therefore, Y-bearing take-up units may also be used where shock loads or variable axial loads occur, provided the adjustment screw and the way it is secured to the Y-bearing take-up unit is sufficiently strong.

If SKF Y-bearing units are to be used in an application where health, safety, or the environment is at risk, contact the SKF application engineering service during the design phase.

End covers

To protect the shaft ends and avoid any accidents, end covers are available for Y-bearing take-up units in the TU series (→ fig. 3).

In the product tables, end covers in the ECY 2 series are shown together with the appropriate bearing unit. The designation of the end cover is listed, together with the distance that the end cover protrudes from the housing.


For additional information about end covers, refer to the section *Design of Y-bearing arrangements* on page 47.

Grease fills


All standard SKF Y-bearing take-up units are filled with a high-quality, long-lasting grease containing a lithium-calcium thickener that has a consistency of 2 on the NLGI scale.

For additional information about lubricants and lubrication, refer to the section *Lubrication and maintenance*, starting on page 48.

**Y-bearing take-up units with a cast housing and grub screws, metric shafts
d 20 – 60 mm**

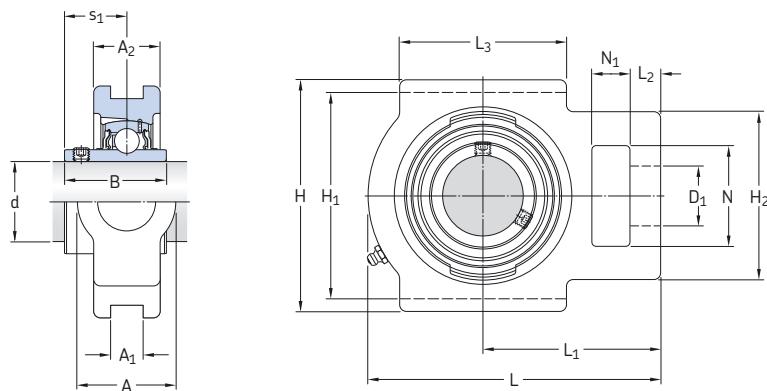


Dimensions															Designation	
d	A	A ₁	A ₂	B	D ₁	H	H ₁	H ₂	L	L ₁	L ₂	L ₃	N	N ₁	s ₁	Bearing unit
mm															–	
20	34	13,5	25	31	19	92	76	54	97	62	10	54	32	16	18,3	TU 20 TF
	34	12	25	31	19	92	76	54	97	62	10	54	32	16	18,3	TUJ 20 TF
25	34	13,5	25	34,1	19	91	76	53	100	64	10	52	33	16	19,8	TU 25 TF
	34	12	25	34,1	19	91	76	53	100	64	10	52	33	16	19,8	TUJ 25 TF
30	37	13,5	28	38,1	22	104	89	56	114	70	10	57	37	16	22,2	TU 30 TF
	37	12	28	38,1	22	104	89	56	114	70	10	57	37	16	22,2	TUJ 30 TF
35	37	13,5	30	42,9	22	103	89	64	129	78	12	64	38	17	25,4	TU 35 TF
	37	12	30	42,9	22	103	89	64	129	78	12	64	38	17	25,4	TUJ 35 TF
40	49	17,5	33	49,2	29	115	101	83	145	88	15	83	50	19	30,2	TU 40 TF
	49	16	33	49,2	29	115	102	83	145	88	15	83	50	19	30,2	TUJ 40 TF
45	49	17,5	35	49,2	29	117	101	83	144	87	15	83	49	19	30,2	TU 45 TF
	49	16	35	49,2	29	117	102	83	144	87	15	83	49	19	30,2	TUJ 45 TF
50	49	17,5	36	51,6	29	117	101	83	149	90	16	86	49	19	32,6	TU 50 TF
	49	16	36	51,6	29	117	102	83	149	90	16	86	49	19	32,6	TUJ 50 TF
55	64	27	41	55,6	35	146	130	102	171	106	19	95	64	25	33,4	TU 55 TF
	64	22	41	55,6	35	146	130	102	171	106	19	95	64	25	33,4	TUJ 55 TF
60	60	22	44	65,1	35	146	130	102	186	118	19	100	63,5	32	39,7	TUJ 60 TF



Designations		Separate components	Housing	Basic load ratings			Fatigue load limit P_u	Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate end cover	
Bearing unit				dynamic C	static C_0	kN				Designation	Dimension A5
TU 20 TF	TU 504 M	YAR 204-2F	12,7	6,55	0,28	8 500	0,73	ECY 204	18,5	-	-
TUJ 20 TF	TUJ 504	YAR 204-2F	12,7	6,55	0,28	8 500	0,76	-	-	-	-
TU 25 TF	TU 505 M	YAR 205-2F	14	7,8	0,335	7 000	0,77	ECY 205	18	-	-
TUJ 25 TF	TUJ 505	YAR 205-2F	14	7,8	0,335	7 000	0,82	-	-	-	-
TU 30 TF	TU 506 M	YAR 206-2F	19,5	11,2	0,475	6 300	1,25	ECY 206	20	-	-
TUJ 30 TF	TUJ 506	YAR 206-2F	19,5	11,2	0,475	6 300	1,28	-	-	-	-
TU 35 TF	TU 507 M	YAR 207-2F	25,5	15,3	0,655	5 300	1,45	ECY 207	22	-	-
TUJ 35 TF	TUJ 507	YAR 207-2F	25,5	15,3	0,655	5 300	1,50	-	-	-	-
TU 40 TF	TU 508 M	YAR 208-2F	30,7	19	0,8	4 800	2,30	ECY 208	23,5	-	-
TUJ 40 TF	TUJ 508	YAR 208-2F	30,7	19	0,8	4 800	2,35	-	-	-	-
TU 45 TF	TU 509 M	YAR 209-2F	33,2	21,6	0,915	4 300	2,30	ECY 209	23	-	-
TUJ 45 TF	TUJ 509	YAR 209-2F	33,2	21,6	0,915	4 300	2,35	-	-	-	-
TU 50 TF	TU 510 M	YAR 210-2F	35,1	23,2	0,98	4 000	2,40	ECY 210	29,5	-	-
TUJ 50 TF	TUJ 510	YAR 210-2F	35,1	23,2	0,98	4 000	2,50	-	-	-	-
TU 55 TF	TU 511 M	YAR 211-2F	43,6	29	1,25	3 600	3,85	ECY 211	34	-	-
TUJ 55 TF	TUJ 511	YAR 211-2F	43,6	29	1,25	3 600	4,00	-	-	-	-
TUJ 60 TF	TUJ 512	YAR 212-2F	52,7	36	1,53	3 400	5,00	-	-	-	-

Y-bearing take-up units with a cast housing and grub screws, inch shafts
d 3/4 – 1 7/16 in

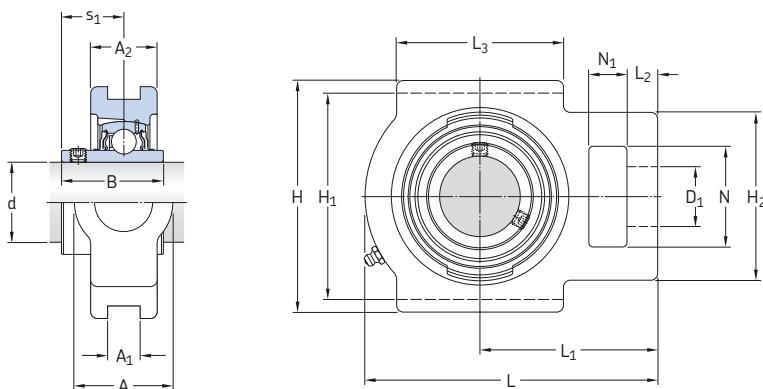


Dimensions

Designation
Bearing unit

d	A	A ₁	A ₂	B	D ₁	H	H ₁	H ₂	L	L ₁	L ₂	L ₃	N	N ₁	s ₁	
in/mm															–	
3/4 19,05	1.34 34	0.53 13,5	0.98 25	1.22 31	0.75 19	3.62 92	2.99 76	2.13 54	3.82 97	2.44 62	0.39 10	2.13 54	1.26 32	0.63 16	0.72 18,3	TU 3/4 TF
13/16 20,638	1.34 34	0.53 13,5	0.98 25	1.34 34,1	0.75 19	3.58 91	2.99 76	2.09 53	3.94 100	2.52 64	0.39 10	2.05 52	1.3 33	0.63 16	0.78 19,8	TU 13/16 TF
7/8 22,225	1.34 34	0.53 13,5	0.98 25	1.34 34,1	0.75 19	3.58 91	2.99 76	2.09 53	3.94 100	2.52 64	0.39 10	2.05 52	1.3 33	0.63 16	0.78 19,8	TU 7/8 TF
15/16 23,813	1.34 34	0.53 13,5	0.98 25	1.34 34,1	0.75 19	3.58 91	2.99 76	2.09 53	3.94 100	2.52 64	0.39 10	2.05 52	1.3 33	0.63 16	0.78 19,8	TU 15/16 TF
1 25,4	1.34 34	0.53 13,5	0.98 25	1.34 34,1	0.75 19	3.58 91	2.99 76	2.09 53	3.94 100	2.52 64	0.39 10	2.05 52	1.3 33	0.63 16	0.78 19,8	TU 1. TF
1 1/16 26,988	1.46 37	0.53 13,5	1.1 28	1.5 38,1	0.87 22	4.09 104	3.5 89	2.2 56	4.49 114	2.76 70	0.39 10	2.24 57	1.46 37	0.63 16	0.87 22,2	TU 1.1/16 TF
1 1/8 28,575	1.46 37	0.53 13,5	1.1 28	1.5 38,1	0.87 22	4.09 104	3.5 89	2.2 56	4.49 114	2.76 70	0.39 10	2.24 57	1.46 37	0.63 16	0.87 22,2	TU 1.1/8 TF
1 3/16 30,163	1.46 37	0.53 13,5	1.1 28	1.5 38,1	0.87 22	4.09 104	3.5 89	2.2 56	4.49 114	2.76 70	0.39 10	2.24 57	1.46 37	0.63 16	0.87 22,2	TU 1.3/16 TF
1 1/4 31,75	1.46 37	0.53 13,5	1.18 30	1.69 42,9	0.87 22	4.06 103	3.5 89	2.52 64	5.08 129	3.07 78	0.47 12	2.52 64	1.5 38	0.67 17	1 25,4	TU 1.1/4 TF
1 5/16 33,338	1.46 37	0.53 13,5	1.18 30	1.69 42,9	0.87 22	4.06 103	3.5 89	2.52 64	5.08 129	3.07 78	0.47 12	2.52 64	1.5 38	0.67 17	1 25,4	TU 1.5/16 TF
1 3/8 34,925	1.46 37	0.53 13,5	1.18 30	1.69 42,9	0.87 22	4.06 103	3.5 89	2.52 64	5.08 129	3.07 78	0.47 12	2.52 64	1.5 38	0.67 17	1 25,4	TU 1.3/8 TF
1 7/16 36,513	1.46 37	0.53 13,5	1.18 30	1.69 42,9	0.87 22	4.06 103	3.5 89	2.52 64	5.08 129	3.07 78	0.47 12	2.52 64	1.5 38	0.67 17	1 25,4	TU 1.7/16 TF

Designations Bearing unit	Separate components		Basic load ratings		Fatigue load limit	Limiting speed	Mass
	Housing	Bearing	dynamic C	static C_0	P_u	with shaft tolerance h6	Bearing unit
–			lbf/kN		lbf/kN	r/min	lb/kg
TU 3/4 TF	TU 504 U	YAR 204-012-2F	2 860 12,7	1 470 6,55	60 0,28	8 500	1.61 0,73
TU 13/16 TF	TU 505 U	YAR 205-013-2F	3 150 14	1 760 7,8	80 0,335	7 000	1.79 0,81
TU 7/8 TF	TU 505 U	YAR 205-014-2F	3 150 14	1 760 7,8	80 0,335	7 000	1.76 0,80
TU 15/16 TF	TU 505 U	YAR 205-015-2F	3 150 14	1 760 7,8	80 0,335	7 000	1.72 0,78
TU 1. TF	TU 505 M	YAR 205-100-2F	3 150 14	1 760 7,8	80 0,335	7 000	1.68 0,76
TU 1.1/16 TF	TU 506 U	YAR 206-101-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2.85 1,30
TU 1.1/8 TF	TU 506 U	YAR 206-102-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2.80 1,25
TU 1.3/16 TF	TU 506 U	YAR 206-103-2F	4 390 19,5	2 520 11,2	110 0,475	6 300	2.75 1,25
TU 1.1/4 TF	TU 507 M	YAR 207-104-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3.30 1,50
TU 1.5/16 TF	TU 507 U	YAR 207-105-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3.30 1,50
TU 1.3/8 TF	TU 507 U	YAR 207-106-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3.20 1,45
TU 1.7/16 TF	TU 507 U	YAR 207-107-2F	5 740 25,5	3 440 15,3	150 0,655	5 300	3.15 1,45

Y-bearing take-up units with a cast housing and grub screws, inch shafts
d 1 1/2 – 2 3/16 in

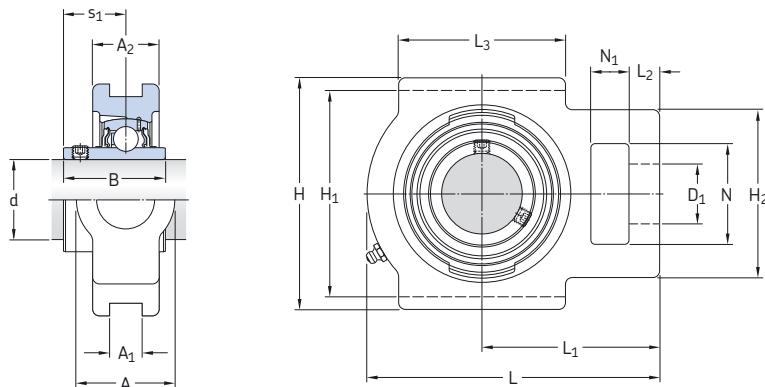


Dimensions

Designation
 Bearing unit

d	A	A ₁	A ₂	B	D ₁	H	H ₁	H ₂	L	L ₁	L ₂	L ₃	N	N ₁	s ₁	Designation
1 1/2 38,1	1.93 49	0.69 17,5	1.3 33	1.94 49,2	1.14 29	4.53 115	3.98 101	3.27 83	5.71 145	3.46 88	0.59 15	3.27 83	1.97 50	0.75 19	1.19 30,2	TU 1.1/2 TF
1 11/16 42,863	1.93 49	0.69 17,5	1.38 35	1.94 49,2	1.14 29	4.61 117	3.98 101	3.27 83	5.67 144	3.43 87	0.59 15	3.27 83	1.93 49	0.75 19	1.19 30,2	TU 1.11/16 TF
1 3/4 44,45	1.93 49	0.69 17,5	1.38 35	1.94 49,2	1.14 29	4.61 117	3.98 101	3.27 83	5.67 144	3.43 87	0.59 15	3.27 83	1.93 49	0.75 19	1.19 30,2	TU 1.3/4 TF
1 15/16 49,213	1.93 49	0.69 17,5	1.42 36	2.03 51,6	1.14 29	4.61 117	3.98 101	3.27 83	5.87 149	3.54 90	0.63 16	3.39 86	1.93 49	0.75 19	1.28 32,6	TU 1.15/16 TF
2 50,8	2.52 64	1.06 27	1.61 41	2.19 55,6	1.38 35	5.75 146	5.12 130	4.02 102	6.73 171	4.17 106	0.75 19	3.74 95	2.52 64	0.98 25	1.31 33,4	TU 2. TF
2 3/16 55,563	2.52 64	1.06 27	1.61 41	2.19 55,6	1.38 35	5.75 146	5.12 130	4.02 102	6.73 171	4.17 106	0.75 19	3.74 95	2.52 64	0.98 25	1.31 33,4	TU 2.3/16 TF

Designations Bearing unit	Separate components Housing Bearing		Basic load ratings dynamic static C C_0		Fatigue load limit P_u	Limiting speed with shaft tolerance $h6$	Mass Bearing unit
–			lbf/kN		lbf/kN	r/min	lb/kg
TU 1.1/2 TF	TU 508 M	YAR 208-108-2F	6 910 30,7	4 280 19	180 0,8	5 300	4,95 2,25
TU 1.11/16 TF	TU 509 U	YAR 209-111-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	5,20 2,35
TU 1.3/4 TF	TU 509 U	YAR 209-112-2F	7 470 33,2	4 860 21,6	210 0,915	4 300	5,50 2,50
TU 1.15/16 TF	TU 510 U	YAR 210-115-2F	7 900 35,1	5 220 23,2	220 0,98	4 000	5,30 2,40
TU 2. TF	TU 511 M	YAR 211-200-2F	9 810 43,6	6 530 29	280 1,25	4 000	8,80 4,00
TU 2.3/16 TF	TU 511 U	YAR 211-203-2F	9 810 43,6	6 530 29	280 1,25	3 600	8,40 3,80


**Y-bearing take-up units with a cast housing and an eccentric locking collar, metric shafts
d 20 – 55 mm**

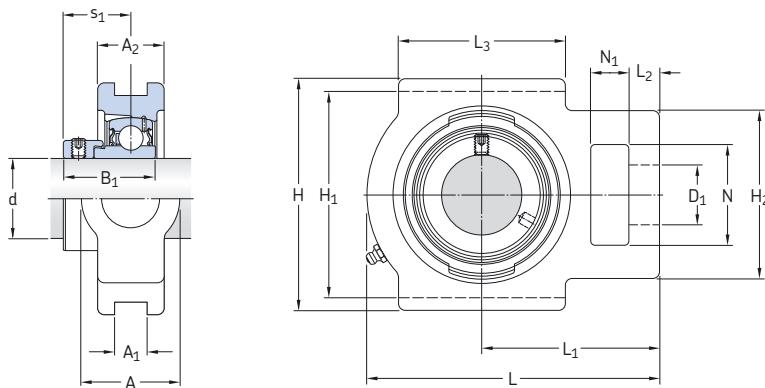

Dimensions

Designation
Bearing unit

d	A	A ₁	A ₂	B ₁	D ₁	H	H ₁	H ₂	L	L ₁	L ₂	L ₃	N	N ₁	s ₁	Designation
mm															Bearing unit	
20	34	13,5	25	31	19	92	76	54	97	62	10	54	32	16	23,5	TU 20 FM
25	34	13,5	25	31	19	91	76	53	100	64	10	52	33	16	23,5	TU 25 FM
30	37	13,5	28	35,7	22	104	89	56	114	70	10	57	37	16	26,7	TU 30 FM
35	37	13,5	30	38,9	22	103	89	64	129	78	12	64	38	17	29,4	TU 35 FM
40	49	17,5	33	43,7	29	115	101	83	145	88	15	83	50	19	32,7	TU 40 FM
45	49	17,5	35	43,7	29	117	101	83	144	87	15	83	49	19	32,7	TU 45 FM
50	49	17,5	36	43,7	29	117	101	83	149	90	16	86	49	19	32,7	TU 50 FM
55	64	27	41	48,4	35	146	130	102	171	106	19	95	64	25	36,4	TU 55 FM



Designations				Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate end cover Designation	Dimension A₅
Bearing unit	Separate components	Housing	Bearing	dynamic C	static C ₀	P _u	r/min	kg	–	mm
TU 20 FM	TU 504 M	YET 204		12,7	6,55	0,28	8 500	0,73	ECY 204	18,5
TU 25 FM	TU 505 M	YET 205		14	7,8	0,335	7 000	0,77	ECY 205	18
TU 30 FM	TU 506 M	YET 206		19,5	11,2	0,475	6 300	1,25	ECY 206	20
TU 35 FM	TU 507 M	YET 207		25,5	15,3	0,655	5 300	1,45	ECY 207	22
TU 40 FM	TU 508 M	YET 208		30,7	19	0,8	4 800	2,30	ECY 208	23,5
TU 45 FM	TU 509 M	YET 209		33,2	21,6	0,915	4 300	2,30	ECY 209	23
TU 50 FM	TU 510 M	YET 210		35,1	23,2	0,98	4 000	2,40	ECY 210	29,5
TU 55 FM	TU 511 M	YET 211		43,6	29	1,25	3 600	3,85	ECY 211	34



Engineered Y-bearing units

Y-bearings and Y-bearing units for extreme temperatures.....	248
Y-bearings for extreme temperatures	249
Y-bearing units for extreme temperatures.....	250
Data – general	251
Selection of bearing size	252
Axial load carrying capacity.....	253
Maintenance	253
Additional information	253
Product tables	
6.1 Y-bearings for extreme temperatures,	
metric shafts	254
inch shafts.....	255
6.2 Y-bearing plummer block units for extreme temperatures,	
metric shafts	256
inch shafts.....	258
6.3 Flanged Y-bearing units with a cast housing with a square flange, for extreme temperatures,	
metric shafts	260
inch shafts.....	261
6.4 Flanged Y-bearing units with a cast housing with an oval flange, for extreme temperatures,	
metric shafts	262
inch shafts.....	264
SKF ConCentra ball bearing units.....	266
Design	267
Data – general	268
Product tables	
6.5 SKF ConCentra ball bearing units with a plummer block housing,	
metric shafts	270
inch shafts.....	272
Y-bearing units for the food industry	274
Designs	274
Data – general	277
Product tables	
6.6 Y-bearing plummer block units for the food industry,	
metric shafts	280
inch shafts.....	282
6.7 Y-bearing plummer block units with a short base for the food industry,	
metric shafts	284
inch shafts.....	286
6.8 Flanged Y-bearing units with a housing with a square flange, for the food industry	
metric shafts	288
inch shafts.....	290
6.9 Flanged Y-bearing units with a housing with an oval flange, for the food industry,	
metric shafts	292
inch shafts.....	294
6.10 Y-bearing take-up units for the food industry,	
metric shafts	296
inch shafts.....	298
SKF	247

Y-bearings and Y-bearing units for extreme temperatures

For bearing arrangements that have to operate at extreme temperatures, as low as -150°C or as high as 350°C , or that have to withstand very wide temperature variations, e.g. in kiln trucks, furnaces or the conveyor systems of lacquering equipment, standard rolling bearings are unsuitable. SKF has therefore developed temperature-tolerant products:

- Y-bearings (\rightarrow fig. 1)
- Y-bearing plummer (pillow) block units (\rightarrow fig. 2)
- flanged Y-bearing units

They meet widely differing demands:

- reduced machine operating costs
- extended maintenance-free service life
- high operational reliability, even in severe environments

The bearings and units for extreme temperatures, belonging to the SKF standard assortment, are described below and listed in the relevant product tables. On demand, SKF can produce bearings for extreme temperatures, engineered to meet specific needs. For additional information, contact the SKF application engineering service.

Fig. 1



Fig. 2




Y-bearings for extreme temperatures


SKFY-bearings for extreme temperatures have a design corresponding to that of Y-bearings in the YAR 2-2FW series with grub screws. The characteristic features of these bearings include large radial internal clearance, special cages and shields. All surfaces of extreme temperature Y-bearings are manganese phosphated. This provides protection against corrosion and improves running properties.

SKFY-bearings for extreme temperatures are available in two different designs:

- The VA201 design (→ **fig. 3a**) is equipped with a riveted steel cage and a steel shield with a flinger on both sides. These Y-bearings, lubricated with an extreme-temperature polyalkylene glycol graphite paste, are intended for operating temperatures between -40 and +250 °C.
- The VA228 design (→ **fig. 3b**), like the VA201 design, is equipped with a shield and a flinger on both sides. However, the VA228 design uses a "coronet" cage made of graphite, which also serves as a lubricant. The permissible operating temperature range for these bearings is between -150 and +350 °C.



a



b

Y-bearing units for extreme temperatures

Y-bearing units for extreme temperatures have grey cast iron housings with zinc-coated surfaces and are available in three different designs:

- plummer block units (**→ fig. 4**)
- flanged units with a housing with a square flange and four bolt holes (**→ fig. 5**)
- flanged units with a housing with an oval flange and two bolt holes (**→ fig. 6**)

The cast housings of these Y-bearing units are dimensionally interchangeable with standard Y-bearing housings, except for a few sizes, where some dimensions differ slightly. The housings are zinc-coated to provide better protection against corrosion.

The housings do not have a grease fitting, as the incorporated bearings are lubricated for life. The housing bore, which is coated with a lubricating paste, has tolerances to accommodate initial misalignment, even at extreme temperatures.

Fig. 4



Fig. 5



Fig. 6



Data – general

Dimensions

The boundary dimensions of Y-bearings for extreme temperatures are in accordance with ISO 9628:2006.

The boundary dimensions of Y-bearing units for extreme temperatures are in accordance with ISO 3228:1993.

Tolerances

The bore and outside diameter of Y-bearings for extreme temperatures are produced to tolerances indicated in **table 1**.

The values specified there for the bore diameter of the bearings are slightly tighter than those specified in ISO 9628:2006. Since the bearings have a special surface treatment, there may be slight deviations from the standard tolerances. However, these deviations will not influence mounting or bearing performance.

The tolerance for the height of the shaft axis above the support surface of the plummer block units, dimension H₁, is 0/-0,25 mm.

Radial internal clearance

SKFY-bearings for extreme temperatures and the corresponding Y-bearing units have twice the C5 clearance for deep groove ball bearings in accordance with ISO 5753:1991.

Clearance limits are listed in **table 2** and are valid before mounting, under zero measuring load.

Speeds

Y-bearings for extreme temperatures were developed for very slow speed applications e.g. a few revolutions per minute. However, experience has shown that it is possible to run these bearings for long periods at speeds up to 100 r/min without maintenance. If the bearings are to be used at higher speeds, contact the SKF application engineering service for additional information.

Table 1

Tolerances of Y-bearings for extreme temperatures

Nominal diameter d, D over incl.		Bore diameter		Outside diameter	
		Deviation high	low	Deviation high	low
mm	μm	μm	μm	μm	μm
18	30	+18	0	–	–
30	50	+21	0	0	-10
50	80	+24	0	0	-10
80	120	+28	0	0	-15

Table 2

Radial internal clearance for Y-bearings for extreme temperatures

Bearing size ¹⁾ from	to	Radial internal clearance	
		min	max
–	–	μm	μm
04	04	56	96
05	06	60	106
07	08	80	128
09	10	90	146
11	13	110	180

¹⁾ For example size 06 includes all bearings based on a 6206 bearing: such as YAR 206-2FW/VA201, YAR 206-103-2FW/VA201

Selection of bearing size

The requisite size is determined by the basic static load rating C_0 , as Y-bearings and Y-bearing units for extreme temperatures rotate at very slow speeds.

At extreme temperatures, the load carrying capacity of a bearing is reduced. This is taken into account by multiplying the basic static load rating C_0 by a temperature factor f_T .

The requisite basic static load rating can be determined by the formula

$$C_{0\text{req}} = 2 P_0 / f_T$$

where

$C_{0\text{req}}$ = requisite basic static load rating, kN

P_0 = equivalent static bearing load, kN

f_T = temperature factor (\rightarrow table 3)

The equivalent static bearing load P_0 is obtained from

$$P_0 = 0,6 F_r + 0,5 F_a$$

where

F_r = actual radial bearing load, kN

F_a = actual axial bearing load, kN

When calculating P_0 , the maximum load that can occur should be used and its radial and axial components inserted in the equation above. If $P_0 < F_r$, then $P_0 = F_r$ should be used.

For different loads and temperatures, the requisite basic static load rating $C_{0\text{req}}$ is shown in table 4. Using the requisite basic static load rating calculated from the above, or taken from table 4, a suitable Y-bearing or Y-bearing unit can be selected from the product tables.

The Y-bearing or Y-bearing unit selected should have a C_0 value that is equal to or greater than the requisite value.

Table 3

Temperature factor f_T	
Operating temperature	Factor f_T
°C	–
150	1
200	0,95
250	0,9
300	0,8
350	0,64

Table 4

Requisite basic static load rating for different loads and temperatures

Bearing load P_0	Requisite basic static load rating $C_{0\text{req}}$ for operating temperatures up to				
	150 °C	200 °C	250 °C	300 °C	350 °C
0,5	1	1,05	1,11	1,2	1,56
1	2	2,1	2,22	2,5	3,12
2	4	4,2	4,44	5	6,25
3	6	6,3	6,67	7,5	9,4
4	8	8,4	8,9	10	12,5
5	10	10,5	11,1	12,5	15,6
6	12	12,6	13,3	15	18,8
7	14	14,7	15,5	17,5	21,9
8	16	16,8	17,8	20	25
9	18	18,9	19,9	22,5	28,1
10	20	21	22,2	25	31,3
11	22	23,1	24,5	27,5	34,4
12	24	25,2	26,7	30	37,5
13	26	27,3	29	32,5	40,5
14	28	29,4	31,1	35	44
15	30	31,5	33,3	37,5	47
16	32	33,6	35	40	50
17	34	35,7	37,8	42,5	53
18	36	37,8	40	45	56
19	38	40	42	47,5	60
20	40	42	44,5	50	62,5
22	44	46	49	55	69
24	48	50,5	53	60	75
26	52	54,5	58	65	81
28	56	59	62	70	87,5
30	60	63	66,5	75	94
32	64	67	71	80	–
34	68	71,5	75,5	85	–
36	72	75,5	80	90	–
38	76	80	84,5	85	–
40	80	84	89	–	–
42	84	88,5	93	–	–
44	88	92,5	–	–	–

Axial load carrying capacity

Y-bearings and Y-bearing units for extreme temperatures have an axial load carrying capacity that is limited to 15% of the basic static load rating C_0 , because of the large radial internal clearance and the way the bearing is locked on the shaft.

Maintenance


SKFY-bearings and Y-bearing units for extreme temperatures are lubricated for life and therefore have no relubrication facility.

Additional information

Contact the SKF application engineering service for additional information about:

- selection of bearing type
- selection of bearing size
- arrangement design
- mounting and dismounting

Y-bearings for extreme temperatures, metric shafts
d 20 – 60 mm

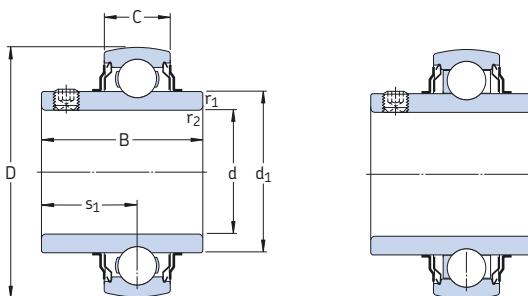


YAR .. /VA201

YAR .. /VA228

Dimensions							Basic static load rating C_0	Mass kg	Designations	
d	D	B	C	d_1	s_1	$r_{1,2}$ min			Bearing with a pressed steel cage	one-piece "coronet" cage of graphite
mm							kN	kg	–	
20	47	31	14	28,2	18,3	0,6	6,55	0,14	YAR 204-2FW/VA201	YAR 204-2FW/VA228
25	52	34,1	15	33,7	19,8	0,6	7,8	0,17	YAR 205-2FW/VA201	YAR 205-2FW/VA228
30	62	38,1	18	39,7	22,2	0,6	11,2	0,28	YAR 206-2FW/VA201	YAR 206-2FW/VA228
35	72	42,9	19	46,1	25,4	1	15,3	0,41	YAR 207-2FW/VA201	YAR 207-2FW/VA228
40	80	49,2	21	51,8	30,2	1	19	0,55	YAR 208-2FW/VA201	YAR 208-2FW/VA228
45	85	49,2	22	56,8	30,2	1	21,6	0,60	YAR 209-2FW/VA201	YAR 209-2FW/VA228
50	90	51,6	22	62,5	32,6	1	23,2	0,69	YAR 210-2FW/VA201	YAR 210-2FW/VA228
55	100	55,6	25	69,1	33,4	1	29	0,94	YAR 211-2FW/VA201	YAR 211-2FW/VA228
60	110	65,1	26	75,6	39,7	1,5	36	1,30	YAR 212-2FW/VA201	YAR 212-2FW/VA228

Y-bearings for extreme temperatures, inch shafts
d 3/4 – 2 7/16 in

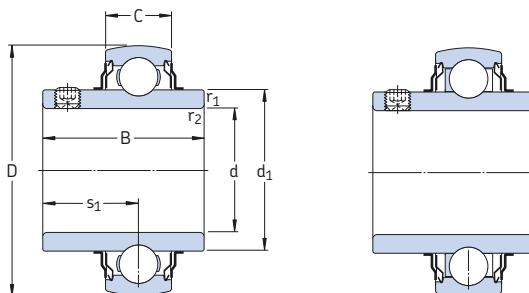


YAR .. /VA201

YAR .. /VA228

Dimensions							Basic static load rating C ₀	Mass	Designations	
d	D	B	C	d ₁	s ₁	r _{1,2} min			Bearing with a pressed steel cage	one-piece "coronet" cage of graphite
in/mm							lbf/kN	lb/kg	–	
3/4 19,05	1.8504 47	1.22 31	0.55 14	1.11 28,2	0.72 18,3	0.02 0,6	1 470 6,55	0.31 0,14	YAR 204-012-2FW/VA201	YAR 204-012-2FW/VA228
1 25,4	2.0472 52	1.34 34,1	0.59 15	1.33 33,7	0.78 19,8	0.02 0,6	1 760 7,8	0.37 0,17	YAR 205-100-2FW/VA201	YAR 205-100-2FW/VA228
1 3/16 30,163	2.4409 62	1.50 38,1	0.71 18	1.56 39,7	0.87 22,2	0.02 0,6	2 520 11,2	0.60 0,27	YAR 206-103-2FW/VA201	YAR 206-103-2FW/VA228
1 1/4 31,75	2.8346 72	1.69 42,9	0.75 19	1.81 46,1	1.00 25,4	0.04 1	3 440 15,3	1.01 0,46	YAR 207-104-2FW/VA201	YAR 207-104-2FW/VA228
1 7/16 36,513	2.8346 72	1.69 42,9	0.75 19	1.81 46,1	1.00 25,4	0.04 1	3 440 15,3	0.84 0,38	YAR 207-107-2FW/VA201	YAR 207-107-2FW/VA228
1 1/2 38,1	3.1496 80	1.94 49,2	0.83 21	2.04 51,8	1.19 30,2	0.04 1	4 280 19	1.30 0,59	YAR 208-108-2FW/VA201	YAR 208-108-2FW/VA228
1 11/16 42,863	3.3465 85	1.94 49,2	0.87 22	2.24 56,8	1.19 30,2	0.04 1	4 860 21,6	1.46 0,66	YAR 209-111-2FW/VA201	YAR 209-111-2FW/VA228
1 3/4 44,45	3.3465 85	1.94 49,2	0.87 22	2.24 56,8	1.19 30,2	0.04 1	4 860 21,6	1.37 0,62	YAR 209-112-2FW/VA201	YAR 209-112-2FW/VA228
1 15/16 49,213	3.5433 90	2.03 51,6	0.87 22	2.46 62,5	1.28 32,6	0.04 1	5 220 23,2	1.57 0,71	YAR 210-115-2FW/VA201	YAR 210-115-2FW/VA228
2 50,8	3.9370 100	2.19 55,6	0.98 25	2.72 69,1	1.31 33,4	0.04 1	6 530 29	2.07 0,94	YAR 211-200-2FW/VA201	YAR 211-200-2FW/VA228
2 3/16 55,563	3.9370 100	2.19 55,6	0.98 25	2.72 69,1	1.31 33,4	0.04 1	6 530 29	2.03 0,92	YAR 211-203-2FW/VA201	YAR 211-203-2FW/VA228
2 7/16 61,913	4.3307 110	2.56 65,1	1.02 26	2.98 75,6	1.56 39,7	0.06 1,5	8 100 36	2.85 1,30	YAR 212-207-2FW/VA201	YAR 212-207-2FW/VA228


Y-bearing plummer block units for extreme temperatures, metric shafts
d 20 – 60 mm

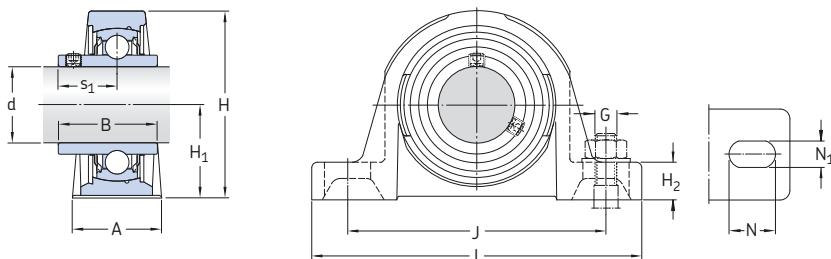

Dimensions d	A	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Basic static load rating C ₀	Mass kg	Designations		
														Y-bearing unit with a pressed steel cage	one-piece "coronet" cage of graphite	
mm												kN	kg	–		
20	32	31	64	33,3	14	97	127	20,5	11,5	10	18,3	6,55	0,57	SY 20 TF/VA201	SY 20 TF/VA228	
25	36	34,1	70	36,5	16	102	130	19,5	11,5	10	19,8	7,8	0,73	SY 25 TF/VA201	SY 25 TF/VA228	
30	40	38,1	82	42,9	16,5	117,5	152	23,5	14	12	22,2	11,2	1,10	SY 30 TF/VA201	SY 30 TF/VA228	
35	45	42,9	93	47,6	19	126	160	21	14	12	25,4	15,3	1,45	SY 35 TF/VA201	SY 35 TF/VA228	
40	48	49,2	99	49,2	19	135,5	175	24,5	14	12	30,2	19	1,80	SY 40 TF/VA201	SY 40 TF/VA228	
45	48	49,2	107	54	20,6	143,5	187	22,5	14	12	30,2	21,6	2,20	SY 45 TF/VA201	SY 45 TF/VA228	
50	54	51,6	114	57,2	22	157	203	26	18	16	32,6	23,2	2,70	SY 50 TF/VA201	SY 50 TF/VA228	
55	60	55,6	127	63,5	23,8	171,5	219	27,5	18	16	33,4	29	3,60	SY 55 TF/VA201	SY 55 TF/VA228	
60	60	65,1	139,5	69,9	26	190,5	240	29,5	18	16	39,7	36	4,45	SY 60 TF/VA201	SY 60 TF/VA228	

6.2

Y-bearing plummer block units for extreme temperatures, inch shafts
d 3/4 – 2 7/16 in

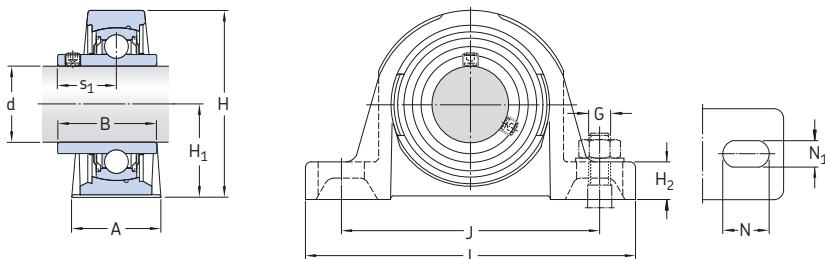


Dimensions

d	A	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Designations	
3/4 19,05	1.26 32	1.22 31	2.52 64	1.31 33,3	0.55 14	3.82 97	5.00 127	0.81 20,5	0.45 11,5	3/8 10	0.72 18,3	SY 3/4 TF/VA201	SY 3/4 TF/VA228
1 25,4	1.42 36	1.34 34,1	2.76 70	1.44 36,5	0.63 16	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	0.78 19,8	SY 1.TF/VA201	SY 1.TF/VA228
1 3/16 30,163	1.57 40	1.50 38,1	3.23 82	1.69 42,9	0.67 17	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	0.87 22,2	SY 1.3/16 TF/VA201	SY 1.3/16 TF/VA228
1 1/4 31,75	1.77 45	1.69 42,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.00 25,4	SY 1.1/4 TF/VA201	SY 1.1/4 TF/VA228
1 7/16 36,513	1.77 45	1.69 42,9	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.00 25,4	SY 1.7/16 TF/VA201	SY 1.7/16 TF/VA228
1 1/2 38,1	1.89 48	1.94 49,2	3.90 99	1.94 49,2	0.75 19	5.33 135,5	6.89 175	0.96 24,5	0.55 14	1/2 12	1.19 30,2	SY 1.1/2 TF/VA201	SY 1.1/2 TF/VA228
1 11/16 42,863	1.89 48	1.94 49,2	4.21 107	2.13 54	0.81 20,6	5.65 143,5	7.36 187	0.89 22,5	0.55 14	1/2 12	1.19 30,2	SY 1.11/16 TF/VA201	SY 1.11/16 TF/VA228
1 3/4 44,45	1.89 48	1.94 49,2	4.21 107	2.13 54	0.81 20,6	5.65 143,5	7.36 187	0.89 22,5	0.55 14	1/2 12	1.19 30,2	SY 1.3/4 TF/VA201	SY 1.3/4 TF/VA228
1 15/16 49,213	2.13 54	2.03 51,6	4.49 114	2.25 57,2	0.87 22	6.18 157	7.99 203	1.02 26	0.71 18	5/8 16	1.28 32,6	SY 1.15/16 TF/VA201	SY 1.15/16 TF/VA228
2 50,8	2.36 60	2.19 55,6	5.00 127	2.50 63,5	0.94 23,8	6.75 171,5	8.62 219	1.08 27,5	0.71 18	5/8 16	1.31 33,4	SY 2.TF/VA201	SY 2.TF/VA228
2 3/16 55,563	2.36 60	2.19 55,6	5.00 127	2.50 63,5	0.94 23,8	6.75 171,5	8.62 219	1.08 27,5	0.71 18	5/8 16	1.31 33,4	SY 2.3/16 TF/VA201	SY 2.3/16 TF/VA228
2 7/16 61,913	2.36 60	2.56 65,1	5.50 139,5	2.75 69,9	1.02 26	7.50 190,5	9.45 240	1.14 29	0.71 18	5/8 16	1.56 39,7	SY 2.7/16 TF/VA201	SY 2.7/16 TF/VA228


Designations Y-bearing unit with a pressed steel cage	one-piece "coronet" cage of graphite	Basic static load rating C_0	Mass
		lbf/kN	lb/kg
SY 3/4 TF/VA201	SY 3/4 TF/VA228	1 470 6,55	1,26 0,57
SY 1. TF/VA201	SY 1. TF/VA228	1 760 7,8	1,61 0,73
SY 1.3/16 TF/VA201	SY 1.3/16 TF/VA228	2 520 11,2	2,45 1,10
SY 1.1/4 TF/VA201	SY 1.1/4 TF/VA228	3 440 15,3	3,20 1,45
SY 1.7/16 TF/VA201	SY 1.7/16 TF/VA228	3 440 15,3	3,20 1,45
SY 1.1/2 TF/VA201	SY 1.1/2 TF/VA228	4 280 19	3,95 1,80
SY 1.11/16 TF/VA201	SY 1.11/16 TF/VA228	4 860 21,6	4,85 2,20
SY 1.3/4 TF/VA201	SY 1.3/4 TF/VA228	4 860 21,6	4,85 2,20
SY 1.15/16 TF/VA201	SY 1.15/16 TF/VA228	5 220 23,2	5,95 2,70
SY 2. TF/VA201	SY 2. TF/VA228	6 530 29	7,95 3,60
SY 2.3/16 TF/VA201	SY 2.3/16 TF/VA228	6 530 29	7,85 3,55
SY 2.7/16 TF/VA201	SY 2.7/16 TF/VA228	8 100 36	9,80 4,45

**Flanged Y-bearing units with a cast housing with a square flange for extreme temperatures,
metric shafts**
d 20 – 60 mm

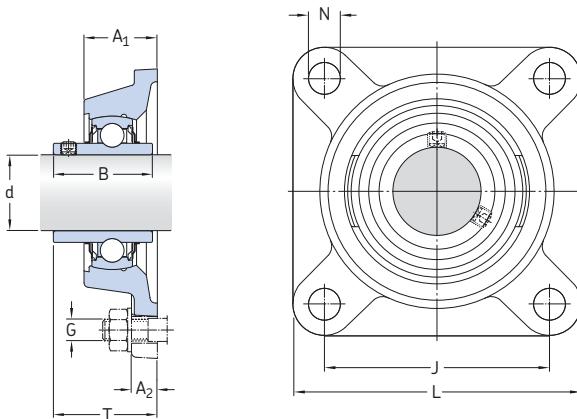


Dimensions									Basic static load rating C_0	Mass	Designations	
d	A ₁	A ₂	B	J	L	N	G	T			Y-bearing unit with a pressed steel cage	one-piece "coronet" cage of graphite
mm									kN	kg	–	
20	29,5	11	31	63,5	86	11,1	10	37,3	6,55	0,60	FY 20 TF/VA201	FY 20 TF/VA228
25	30	12	34,1	70	95	12,7	10	38,8	7,8	0,77	FY 25 TF/VA201	FY 25 TF/VA228
30	32,5	13	38,1	82,5	108	12,7	10	42,2	11,2	1,10	FY 30 TF/VA201	FY 30 TF/VA228
35	34,5	13	42,9	92	118	14,3	12	46,4	15,3	1,40	FY 35 TF/VA201	FY 35 TF/VA228
40	38,5	14	49,2	101,5	130	14,3	12	54,2	19	1,90	FY 40 TF/VA201	FY 40 TF/VA228
45	39	14	49,2	105	137	15,9	14	54,2	21,6	2,10	FY 45 TF/VA201	FY 45 TF/VA228
50	43	15	51,6	111	143	15,9	14	60,6	23,2	2,50	FY 50 TF/VA201	FY 50 TF/VA228
55	47,5	16	55,6	130	162	19	16	64,4	29	3,60	FY 55 TF/VA201	FY 55 TF/VA228
60	52	17	65,1	143	175	19	16	73,7	36	4,60	FY 60 TF/VA201	FY 60 TF/VA228

**Flanged Y-bearing units with a cast housing with a square flange for extreme temperatures,
inch shafts
d $\frac{3}{4}$ – $2\frac{7}{16}$ in**

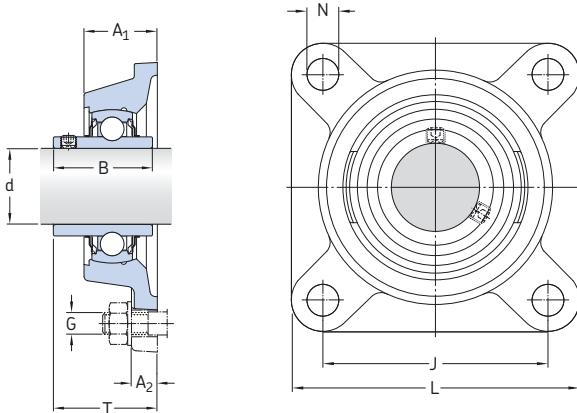

Dimensions								Basic static load rating C ₀	Mass	Designations		
d	A ₁	A ₂	B	J	L	N	G			Y-bearing unit with a pressed steel cage	one-piece "coronet" cage of graphite	
in/mm								lbf/kN	lb/kg	–		
$\frac{3}{4}$ 19,05	1.16 29,5	0.43 11	1.22 31	2.50 63,5	3.39 86	0.44 11,1	$\frac{3}{8}$ $\frac{10}{10}$	1.47 37,3	1 470 6,55	1.35 0,61	FY 3/4 TF/VA201	FY 3/4 TF/VA228
1 25,4	1.18 30	0.47 12	1.34 34,1	2.76 70	3.74 95	0.50 12,7	$\frac{7}{16}$ $\frac{10}{10}$	1.53 38,8	1 760 7,8	1.70 0,77	FY 1. TF/VA201	FY 1. TF/VA228
$1\frac{3}{16}$ 30,163	1.28 32,5	0.51 13	1.50 38,1	3.25 82,5	4.25 108	0.50 12,7	$\frac{7}{16}$ $\frac{10}{10}$	1.66 42,2	2 520 11,2	2.45 1,10	FY 1.3/16 TF/VA201	FY 1.3/16 TF/VA228
$1\frac{1}{4}$ 31,75	1.36 34,5	0.51 13	1.69 42,9	3.62 92	4.65 118	0.56 14,3	$\frac{1}{2}$ $\frac{12}{12}$	1.83 46,4	3 440 15,3	3.20 1,45	FY 1.1/4 TF/VA201	FY 1.1/4 TF/VA228
$1\frac{7}{16}$ 36,513	1.36 34,5	0.51 13	1.69 42,9	3.62 92	4.65 118	0.56 14,3	$\frac{1}{2}$ $\frac{12}{12}$	1.83 46,4	3 440 15,3	3.20 1,45	FY 1.7/16 TF/VA201	FY 1.7/16 TF/VA228
$1\frac{1}{2}$ 38,1	1.52 38,5	0.55 14	1.94 49,2	4.00 101,5	5.12 130	0.56 14,3	$\frac{1}{2}$ $\frac{12}{12}$	2.13 54,2	4 280 19	4.30 1,95	FY 1.1/2 TF/VA201	FY 1.1/2 TF/VA228
$1\frac{11}{16}$ 42,863	1.54 39	0.55 14	1.94 49,2	4.13 105	5.39 137	0.63 15,9	$\frac{9}{16}$ $\frac{14}{14}$	2.13 54,2	4 860 21,6	4.75 2,15	FY 1.11/16 TF/VA201	FY 1.11/16 TF/VA228
$1\frac{3}{4}$ 44,45	1.54 39	0.55 14	1.94 49,2	4.13 105	5.39 137	0.63 15,9	$\frac{9}{16}$ $\frac{14}{14}$	2.13 54,2	4 860 21,6	4.65 2,10	FY 1.3/4 TF/VA201	FY 1.3/4 TF/VA228
$1\frac{15}{16}$ 49,213	1.69 43	0.59 15	2.03 51,6	4.37 111	5.63 143	0.63 15,9	$\frac{9}{16}$ $\frac{14}{14}$	2.39 60,6	5 220 23,2	5.50 2,50	FY 1.15/16 TF/VA201	FY 1.15/16 TF/VA228
2 50,8	1.87 47,5	0.63 16	2.19 55,6	5.12 130	6.38 162	0.75 19	$\frac{5}{8}$ $\frac{16}{16}$	2.54 64,4	6 530 29	8.25 3,75	FY 2. TF/VA201	FY 2. TF/VA228
$2\frac{3}{16}$ 55,563	1.87 47,5	0.63 16	2.19 55,6	5.12 130	6.38 162	0.75 19	$\frac{5}{8}$ $\frac{16}{16}$	2.54 64,4	6 530 29	7.85 3,55	FY 2.3/16 TF/VA201	FY 2.3/16 TF/VA228
$2\frac{7}{16}$ 61,913	2.05 52	0.67 17	2.56 65,1	5.63 143	6.89 175	0.75 19	$\frac{5}{8}$ $\frac{16}{16}$	2.90 73,7	8 100 36	9.90 4,50	FY 2.7/16 TF/VA201	FY 2.7/16 TF/VA228

**Flanged Y-bearing units with a cast housing with an oval flange for extreme temperatures,
metric shafts**
d 20 – 55 mm

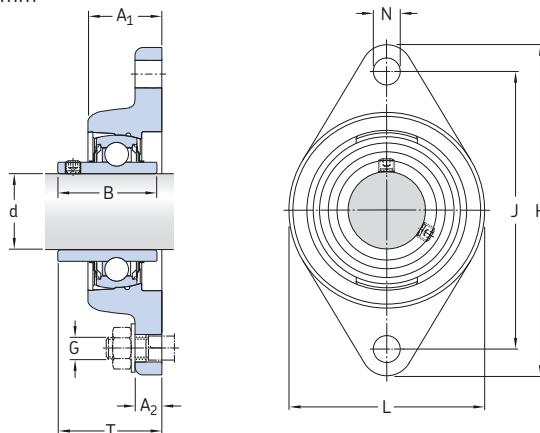


Dimensions										Basic static load rating C_0	Mass	Designations	
d	A ₁	A ₂	B	H	J	L	N	G	T			Y-bearing unit with a pressed steel cage	one-piece "coronet" cage of graphite
mm										kN	kg	–	
20	24,6	11	31	112	89,7	60,3	11,1	10	32,6	6,55	0,50	FYT 20 TF/VA201	FYT 20 TF/VA228
25	30	12	34,1	124	98,9	70	12,7	10	38,8	7,8	0,63	FYT 25 TF/VA201	FYT 25 TF/VA228
30	32,5	13	38,1	141,5	116,7	83	12,7	10	42,2	11,2	0,93	FYT 30 TF/VA201	FYT 30 TF/VA228
35	34,5	13	42,9	156	130,2	96	14,3	12	46,4	15,3	1,25	FYT 35 TF/VA201	FYT 35 TF/VA228
40	38,5	14	49,2	171,5	143,7	102	14,3	12	54,2	19	1,65	FYT 40 TF/VA201	FYT 40 TF/VA228
45	39	14	49,2	178,5	148,5	111	15,9	14	54,2	21,6	1,80	FYT 45 TF/VA201	FYT 45 TF/VA228
50	43	15	51,6	189	157,2	116	15,9	14	60,6	23,2	2,15	FYT 50 TF/VA201	FYT 50 TF/VA228
55	47,6	20,6	55,6	216	184,2	127	19	16	62,8	29	3,30	FYT 55 TF/VA201	FYT 55 TF/VA228

6.4

**Flanged Y-bearing units with a cast housing with an oval flange for extreme temperatures,
inch shafts**

d $\frac{3}{4}$ – $2\frac{3}{16}$ in

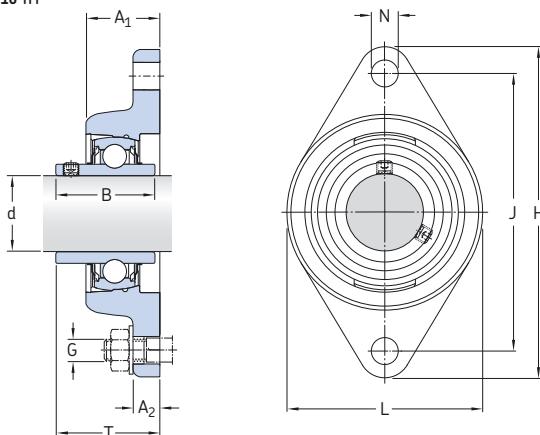

Dimensions

d	A ₁	A ₂	B	H	J	L	N	G	T	Designations	
										Y-bearing unit with a pressed steel cage	one-piece "coronet" cage of graphite
in/mm										–	
$\frac{3}{4}$ 19,05	0.97 24,6	0.43 11	1.22 31	4.41 112	3.53 89,7	2.37 60,3	0.44 11,1	$\frac{3}{8}$ 10	1.28 32,6	FYT 3/4 TF/VA201	FYT 3/4 TF/VA228
1 25,4	1.18 30	0.47 12	1.34 34,1	4.88 124	3.89 98,8	2.76 70	0.50 12,7	$\frac{7}{16}$ 10	1.53 38,8	FYT 1. TF/VA201	FYT 1. TF/VA228
$1\frac{3}{16}$ 30,163	1.28 32,5	0.51 13	1.50 38,1	5.57 141,5	4.59 116,7	3.27 83	0.50 12,7	$\frac{7}{16}$ 10	1.66 42,2	FYT 1.3/16 TF/VA201	FYT 1.3/16 TF/VA228
$1\frac{1}{4}$ 31,75	1.36 34,5	0.51 13	1.69 42,9	6.14 156	5.13 130,2	3.78 96	0.56 14,3	$\frac{1}{2}$ 12	1.83 46,4	FYT 1.1/4 TF/VA201	FYT 1.1/4 TF/VA228
$1\frac{7}{16}$ 36,513	1.36 34,5	0.51 13	1.69 42,9	6.14 156	5.13 130,2	3.78 96	0.56 14,3	$\frac{1}{2}$ 12	1.83 46,4	FYT 1.7/16 TF/VA201	FYT 1.7/16 TF/VA228
$1\frac{1}{2}$ 38,1	1.52 38,5	0.55 14	1.94 49,2	6.75 171,5	5.66 143,7	4.02 102	0.56 14,3	$\frac{1}{2}$ 12	2.13 54,2	FYT 1.1/2 TF/VA201	FYT 1.1/2 TF/VA228
$1\frac{11}{16}$ 42,863	1.54 39	0.55 14	1.94 49,2	7.03 178,5	5.85 148,5	4.37 111	0.63 15,9	$\frac{9}{16}$ 14	2.13 54,2	FYT 1.11/16 TF/VA201	FYT 1.11/16 TF/VA228
$1\frac{3}{4}$ 44,45	1.54 39	0.55 14	1.94 49,2	7.03 178,5	5.85 148,5	4.37 111	0.63 15,9	$\frac{9}{16}$ 14	2.13 54,2	FYT 1.3/4 TF/VA201	FYT 1.3/4 TF/VA228
$1\frac{15}{16}$ 49,213	1.69 43	0.59 15	2.03 51,6	7.44 189	6.19 157,2	4.57 116	0.63 15,9	$\frac{9}{16}$ 14	2.39 60,6	FYT 1.15/16 TF/VA201	FYT 1.15/16 TF/VA228
2 50,8	1.87 47,6	0.81 20,6	2.19 55,6	8.50 216	7.25 184,2	5.00 127	0.75 19	$\frac{5}{8}$ 16	2.47 62,8	FYT 2. TF/VA201	FYT 2. TF/VA228
$2\frac{3}{16}$ 55,563	1.87 47,6	0.81 20,6	2.19 55,6	8.50 216	7.25 184,2	5.00 127	0.75 19	$\frac{5}{8}$ 16	2.47 62,8	FYT 2.3/16 TF/VA201	FYT 2.3/16 TF/VA228

Designations		Basic static load rating C_0	Mass
		lbf/kN	lb/kg
Y-bearing unit with a pressed steel cage	one-piece "coronet" cage of graphite		
–			
FYT 3/4 TF/VA201	FYT 3/4 TF/VA228	1 470 6,55	1,10 0,50
FYT 1. TF/VA201	FYT 1. TF/VA228	1 760 7,8	1,37 0,62
FYT 1.3/16 TF/VA201	FYT 1.3/16 TF/VA228	2 520 11,2	2,03 0,92
FYT 1.1/4 TF/VA201	FYT 1.1/4 TF/VA228	3 440 15,3	2,85 1,30
FYT 1.7/16 TF/VA201	FYT 1.7/16 TF/VA228	3 440 15,3	2,75 1,25
FYT 1.1/2 TF/VA201	FYT 1.1/2 TF/VA228	4 280 19	3,75 1,70
FYT 1.11/16 TF/VA201	FYT 1.11/16 TF/VA228	4 860 21,6	3,95 1,80
FYT 1.3/4 TF/VA201	FYT 1.3/4 TF/VA228	4 860 21,6	3,95 1,80
FYT 1.15/16 TF/VA201	FYT 1.15/16 TF/VA228	5 220 23,2	4,75 2,15
FYT 2. TF/VA201	FYT 2. TF/VA228	6 530 29	7,30 3,30
FYT 2.3/16 TF/VA201	FYT 2.3/16 TF/VA228	6 530 29	7,15 3,25

SKF ConCentra ball bearing units

SKF ConCentra ball bearing units (→ **fig. 1**) are relatively new within the SKF manufacturing programme. They are currently available as plummer block units for:

- metric shafts from 25 to 60 mm
- inch shafts from 1 to $2\frac{15}{16}$ inch

They are identified by the series designation SY..PF. SKF ConCentra ball bearing units are based on the cast iron SY plummer block units that are in use worldwide. SKF ConCentra ball bearing units are also available with flanged housings. For additional information, contact the SKF application engineering service.

What sets the SKF ConCentra ball bearing unit apart from any other Y-bearing unit is its unique 360° locking mechanism. The locking mechanism is based on two mating surfaces, each containing precision engineered inclined serrations. One set of serrations is machined into the bearing bore; the other set is machined into the shaft sleeve.

The near perfect 360° grip on the shaft virtually eliminates shaft damage and the possibility of fretting corrosion. The stepped sleeve is equipped with a mounting and a pressure collar (→ **fig. 2**).

By tightening the grub (set) screws in the mounting collar, using the hexagonal key supplied with each unit, the pressure collar forces the inner ring up the inclined planes of the stepped sleeve, to provide a true concentric tight fit on the shaft (→ **fig. 3**).

SKF ConCentra ball bearing units are particularly well suited for use under the following conditions:



Fig. 1

- applications where commercial or hollow shafts are used
- high speed, moderate load applications where long service life, low noise and vibration levels and quick replacement are prerequisites

They can therefore cover all requirements for bearing arrangements in ventilation systems where there is a need to run continuously and quietly for long periods without requiring very much attention.

Design

SKF ConCentra ball bearing units are ready-to-mount and ready-to-operate. They are filled with a high-quality, long-lasting grease that provides maintenance-free operation in most cases. For operating conditions that make relubrication necessary, the units are provided with a grease fitting.

SKF ConCentra ball bearing units consist of:

- a deep groove ball bearing based on the 62 series, with the inner ring extended on both sides. The bore of the inner ring is serrated to accommodate the SKF ConCentra locking method. The surface of the outer ring is convex
- an SKF ConCentra stepped sleeve
- an SY 500 M series plummer block housing for metric shafts, or an SY 500 U/AH series pillow block housing for inch shafts

The product tables on **pages 270 to 273** list the boundary dimensions as well as the most important performance data for SKF ConCentra ball bearing units for metric and inch shafts. Detailed information about these bearing units can be found in the publication *SKF ConCentra ball bearing units – true concentric locking, for fast and reliable mounting* and in the *SKF Interactive Engineering Catalogue*, available online at www.skf.com.

Fig. 2


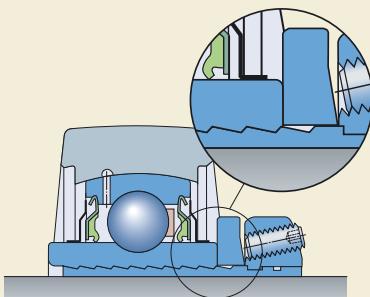


Fig. 3

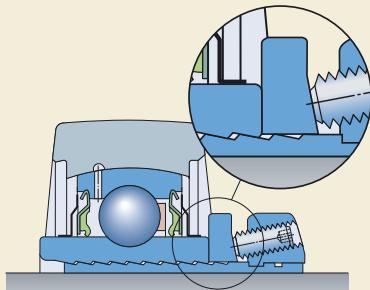

Data – general

Dimensions

The housing boundary dimensions of SKF ConCentra ball bearing units with a cast plummer block housing are in accordance with ISO 3228:1993, ANSI/ABMA 14-1995 or JIS B 1557-1995.

Tolerances

The tolerance for the shaft centre height H_1 above the support surface is:

- $\pm 0,25$ mm for plummer block units with a bore diameter ≤ 40 mm
- $\pm 0,30$ mm for larger plummer block units

The tolerances for the shaft centre height H_1 are tighter than specified in ISO 3228:1993.

Radial internal clearance

SKF ConCentra ball bearing units are manufactured as standard with the internal clearance listed in **table 1**. The values specified there are similar to the values of Group 3 radial clearance listed in ISO 9628:2006, except for the size 215 where values are slightly lower.

Misalignment

SKF ConCentra ball bearing units can accommodate up to 2° of initial misalignment if they are relubricated during operation. Otherwise misalignment of up to 5° can be accommodated.

Additionally, operational shaft deflections of a few minutes or arc can be permitted.

Table 1

Radial internal clearance for SKF ConCentra ball bearing units

Bearing size ¹⁾ from	to	Radial internal clearance min	max
–		μm	
05	06	23	41
07	08	28	46
09	10	30	51
11	13	38	61
15	–	41	69

¹⁾ For example, bearing size 07 includes all bearings based on a Y 207 bearing, such as YSP 207, YSP 207-104-2F/AH, YSP 207-106-2F/AH and YSP 207-107-2F/AH

Load carrying ability of the housings

The housings are made of grey cast iron EN-GJL HB195 in accordance with EN 1561:1997 and can withstand the same dynamic and static loads as the bearings they incorporate.


Attachment to the support surface

SKF ConCentra ball bearing units have two bolt holes in the housing base through which they can be attached to their support surface with fasteners.

Grease fill

Standard design SKF ConCentra ball bearing units are filled with a high-quality, long-lasting grease with a lithium-calcium thickener that has a consistency of 2 on the NLGI scale.


SKF ConCentra ball bearing units with a plummer block housing, metric shafts
d 25 – 60 mm

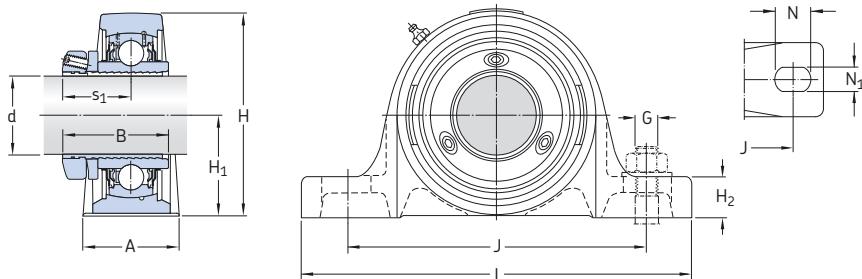

Dimensions	d	A	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Basic load ratings		Fatigue load limit	Designation
													dynamic C	static C ₀		
mm													kN	kN	–	
25	36	41	70,5	36,5	16	102	130	19,5	11,5	10	29	14	7,8	0,335	SY 25 PF	
30	40	45	82,5	42,9	17	117,5	152	23,5	14	12	31	19,5	11,2	0,475	SY 30 PF	
35	45	47	93	47,6	19	126	160	21	14	12	31,7	25,5	15,3	0,655	SY 35 PF	
40	48	51	99	49,2	19	135,5	175	24,5	14	12	34	30,7	19	0,8	SY 40 PF	
45	48	52	107,5	54	21	143,5	187	22,5	14	12	34,5	33,2	21,6	0,915	SY 45 PF	
50	54	54	114,5	57,2	22	157	203	26	18	16	35,5	35,1	23,2	0,98	SY 50 PF	
55	60	57	126	63,5	24	171,5	219	27,5	18	16	37	43,6	29	1,25	SY 55 PF	
60	60	59	138	69,9	26,5	190,5	240	29,5	18	16	37,8	52,7	36	1,53	SY 60 PF	

Designations Bearing unit	Separate components		Limiting speed	Mass
–	Housing	Bearing	r/min	kg
SY 25 PF	SY 505 M	YSP 205-2F	7 000	0,85
SY 30 PF	SY 506 M	YSP 206-2F	6 300	1,20
SY 35 PF	SY 507 M	YSP 207-2F	5 300	1,55
SY 40 PF	SY 508 M	YSP 208-2F	4 800	2,05
SY 45 PF	SY 509 M	YSP 209-2F	4 300	2,25
SY 50 PF	SY 510 M	YSP 210-2F	4 000	2,70
SY 55 PF	SY 511 M	YSP 211-2F	3 600	3,85
SY 60 PF	SY 512 M	YSP 212-2F	3 400	5,00

SKF ConCentra ball bearing units with a plummer block housing, inch shafts
d 1 – 2 15/16 in

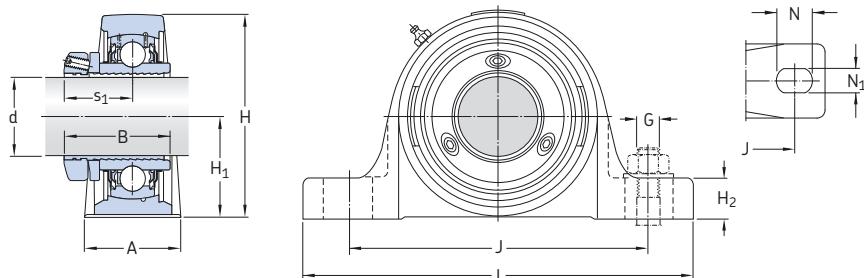

Dimensions												Designation
d	A	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	
in/mm												-
1 25,4	1.42 36	1.63 41,3	2.76 70	1.44 36,5	0.63 16	4.02 102	5.12 130	0.77 19,5	0.45 11,5	3/8 10	1.15 29,3	SY 1.PF/AH
1 3/16 30,163	1.57 40	1.75 44,5	3.23 82	1.69 42,9	0.65 16,5	4.63 117,5	5.98 152	0.93 23,5	0.55 14	1/2 12	1.20 30,5	SY 1.3/16 PF/AH
1 1/4 31,75	1.77 45	1.87 47,6	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.28 32,4	SY 1.1/4 PF/AH
1 3/8 34,925	1.77 45	1.87 47,6	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.28 32,4	SY 1.3/8 PF/AH
1 7/16 36,513	1.77 45	1.87 47,6	3.66 93	1.87 47,6	0.75 19	4.96 126	6.30 160	0.83 21	0.55 14	1/2 12	1.28 32,4	SY 1.7/16 PF/AH
1 1/2 38,1	1.89 48	2 50,8	3.90 99	1.94 49,2	0.75 19	5.33 135,5	6.89 175	0.91 23,2	0.55 14	1/2 12	1.33 33,8	SY 1.1/2 PF/AH
1 11/16 42,863	1.90 48,3	2 50,8	4.22 107	2.13 54,0	0.81 20,6	5.66 143,7	7.36 187	0.89 22,7	0.55 14	1/2 12	1.31 33,3	SY 1.11/16 PF/AH
1 15/16 49,213	2.13 54	2.13 54	4.49 114	2.25 57,2	0.87 22	6.18 157	7.99 203	1.02 26	0.71 18	5/8 16	1.40 35,5	SY 1.15/16 PF/AH
2 3/16 55,563	2.38 60,4	2.25 57,2	5.00 127	2.50 63,5	0.94 23,8	6.75 171,5	8.62 219	1.08 27,5	0.71 18	5/8 16	1.42 36,0	SY 2.3/16 PF/AH
2 7/16 61,913	2.36 60	2.31 58,7	5.50 140	2.75 69,9	1.02 26	7.50 190,5	9.45 240	1.06 27,0	0.71 18	5/8 16	1.48 37,5	SY 2.7/16 PF/AH
2 11/16 68,263	2.56 65	2.37 60,3	5.87 149	3.00 76,2	1.14 29	7.99 203	10.12 257	1.38 35	0.87 22	3/4 20	1.52 38,6	SY 2.11/16 PF/AH
2 15/16 74,613	2.82 71,6	2.50 63,5	6.54 166	3.25 82,6	1.29 32,8	8.50 215,9	10.98 279	1.38 35	0.87 22,2	3/4 20	1.57 39,8	SY 2.15/16 PF/AH

Designations Bearing unit	Separate components		Basic load ratings		Fatigue load limit P_u	Limiting speed r/min	Mass lb/kg
	Housing	Bearing	dynamic C	static C_0			
–			lbf/kN		lbf/kN	r/min	lb/kg
SY 1.PF/AH	SY 505 U/AH	YSP 205-100-2F/AH	3 150 14	1 760 7,8	80 0,335	7 000	1,70 0,77
SY 1.3/16 PF/AH	SY 506 U/AH	YSP 206-103-2F/AH	4 390 19,5	2 520 11,2	110 0,475	6 300	2,85 1,30
SY 1.1/4 PF/AH	SY 507 U/AH	YSP 207-104-2F/AH	5 740 25,5	3 440 15,3	150 0,655	5 300	3,65 1,65
SY 1.3/8 PF/AH	SY 507 U/AH	YSP 207-106-2F/AH	5 740 25,5	3 440 15,3	150 0,655	5 300	3,55 1,60
SY 1.7/16 PF/AH	SY 507 U/AH	YSP 207-107-2F/AH	5 740 25,5	3 440 15,3	150 0,655	5 300	3,40 1,55
SY 1.1/2 PF/AH	SY 508 U/AH	YSP 208-108-2F/AH	6 910 30,7	4 280 19	180 0,8	4 800	4,30 1,95
SY 1.11/16 PF/AH	SY 509 U/AH	YSP 209-111-2F/AH	7 470 33,2	4 860 21,6	210 0,915	4 300	5,30 2,40
SY 1.15/16 PF/AH	SY 510 U/AH	YSP 210-115-2F/AH	7 900 35,1	5 220 23,2	220 0,98	4 000	6,30 2,85
SY 2.3/16 PF/AH	SY 511 U/AH	YSP 211-203-2F/AH	9 810 43,6	6 530 29	280 1,25	3 600	8,05 3,65
SY 2.7/16 PF/AH	SY 512 U/AH	YSP 212-207-2F/AH	11 860 52,7	8 100 36	340 1,53	3 400	11,0 5,00
SY 2.11/16 PF/AH	SY 513 U/AH	YSP 213-211-2F/AH	12 870 57,2	9 000 40	380 1,7	3 000	13,5 6,15
SY 2.15/16 PF/AH	SY 515 U/AH	YSP 215-215-2F/AH	14 920 66,3	11 030 49	460 2,04	2 600	16,0 7,25

Y-bearing units for the food industry

To meet the requirements of the food, beverage and pharmaceutical processing industries, SKF has developed a special range of Y-bearing units.

The housings of these Y-bearing units for the food industry are made of a chemical and corrosion resistant composite material, designed to withstand frequent washdowns. The non-porous surface resists the accumulation of bacteria-forming food particles, and the light-grey colour makes visual inspection easy.

The units are equipped with Y-bearings made of stainless steel (YAR 2-2RF/HV series) or zinc-coated steel (YAR 2-2RF/VE495 series). The bearing inner ring is extended on both sides and is locked on the shaft with grub screws. The bearings can be relubricated.

The sealing arrangement consists of a multi-lip seal, supported by a stainless steel insert, a stainless steel flinger, and a food-compatible rubber backed seal gasket on both sides (→ fig. 1).




Fig. 1

The units are lubricated with food-grade grease.

The adjacent table shows the Y-bearings and Y-bearing units available for the food industry.

Designs

SKF Y-bearing units for the food industry are available in two designs: the L design and the KC design. The L design was developed specifically for food and beverage applications, and is characterized by its smooth surfaces and rounded shapes, for easy cleaning. The KC design is a unit optimized for handling shock loads and high vibration levels. It incorporates a steel coil, embedded in the polymer, to provide high dimensional stability and excellent strength.

Y-bearing units in the L design are available with five different housings:

- plummer block units in the SYL .. TH and SYL .. TR/VE495 series (→ fig. 2a)
- flanged units with a housing with a square flange in the FYL .. THR and FYL .. TR/VE495 series (→ fig. 2b)
- flanged units with a housing with an oval flange in the FYTL .. THR and FYTL .. TR/VE495 series (→ fig. 2c)
- short base units in the SYFL .. TH and SYFL .. TR/VE495 series (→ fig. 2d)
- take-up units in the TUL .. TH and TUL .. TR/VE495 series (→ fig. 2e)

Y-bearing unit	Y-bearing housings for the food industry				
	SYL 5(00) SYKC 5(00)	SYFL 5(00)	FYL 5(00) FYKC 5(00) N	FYTL 5(00) FYTBKC 5(00)	TUL 5(00)
Y-bearings					
YAR 2-2RF/HV	SYL .. TH 20–40 mm 3/4–1 1/2 in	SYFL .. TH 20–40 mm 3/4–1 1/2 in	FYL .. THR 20–40 mm 3/4–1 1/2 in	FYTL .. THR 20–40 mm 3/4–1 1/2 in	TUL .. TH 20–40 mm 3/4–1 1/2 in
	SYKC .. NTH 20–40 mm –	–	FYKC .. NTH 20–40 mm 3/4–1 1/2 in	FYTAKC .. NTH 20–35 mm 3/4–1 1/4 in	– –
YAR 2-2RF/VE495	SYL .. TR/VE495 20–40 mm –	SYFL .. TR/VE495 20–40 mm –	FYL .. TR/VE495 20–40 mm –	FYTL .. TR/VE495 20–40 mm –	TUL .. TR/VE495 20–40 mm –
	SYKC .. NTR/VE495 20–40 mm –	–	FYKC .. NTR/VE495 20–40 mm –	FYTAKC .. NTR/VE495 20–35 mm –	– –

Fig. 2



Fig. 3



a



b



c

Y-bearing units in the KC design are available with three different housings:

- plummer block units in the SYKC .. NTH and SYKC .. NTR/VE 495 series (**→ fig. 3a**)
- flanged units with a housing with a square flange in the FYKC .. NTH and FYKC .. NTR/VE495 series (**→ fig. 3b**)
- flanged units with a housing with an oval flange in the FYTBKC .. NTH and FYTBKC .. NTR/VE495 series (**→ fig. 3c**)

Data – general

Dimensions

The boundary dimensions of SKF Y-bearing housings for food industry have not been standarized either nationally or internationally, but are common in the marketplace. They are similar to cast iron housings and pressed steel housings according to ISO 3228:1993 or JIS B 1559-1995. In nearly all cases, the housings are dimensionally interchangeable with cast iron housings or pressed steel housings of similar shape and same size.

Tolerances

For all Y-bearing units for the food industry, the bearing is matched to the housing bore diameter so that the outer ring is prevented from turning in its seat, but able to accommodate misalignment.

For Y-bearing plummer block units, the tolerances for the shaft centre height H_1 (\rightarrow fig. 4) above the support surface is $+/-0,31$ mm. Tolerances for Y-bearing take-up units:

- The tolerance for the distance between the guide surfaces, dimension H_1 , is $0/-0,4$ mm (\rightarrow fig. 5).
- The tolerance for the width of the guide surfaces, dimension A_1 (\rightarrow fig. 5) is $0/+0,4$ mm.

For additional information about the tolerances of the inner ring bore, refer to the section *Y-bearings, page 89*.

Radial internal clearance

Y-bearing plummer block units, flanged units and take-up units for the food industry have the same radial internal clearance as the individual bearings that they incorporate.

For additional information about the radial internal clearance, refer to the section *Y-bearings, page 90*.

Materials

Housings in the L design are injection moulded from a glass fibre reinforced polyester material. The grease fitting and housing inserts are made of stainless steel.

Housings in the KC design are made of injection moulded glass fibre reinforced polyamide. A steel coil embedded in the housing adds greater stability to its form and excellent strength. The bolt holes in the housing have stainless steel inserts and there is a stainless steel grease fitting for relubrication.

The housings are light-grey for easier visual inspection.

Fig. 4





Fig. 5



Load carrying ability of the housings

Housings for the food industry can withstand the same dynamic and static loads as the Y-bearings they incorporate. They can be used in applications where shock loads or variable axial loads occur.

KC series flanged composite housings for the food industry have a recess (→ fig. 6) at the back for accurate positioning against an appropriate shoulder that is either machined, welded or bolted to the wall (→ fig. 7). Furthermore, these features relieve the attachment bolts of radial forces.

Axial load carrying capacity

The axial load carrying capacity of a Y-bearing unit for the food industry is approximately 20% of the basic dynamic load rating C , if unhardened shafts are used and the grub screws are properly tightened. If the inner ring is supported by an abutment on the shaft, the axial load carrying capacity depends on the nature of this abutment. However, the axial load should not exceed $0,25 C_0$.

Attaching to a support surface

Plummer block units have two bolt holes in the housing base so that they can be bolted to their support surface. The shape and position of the bolt holes vary between different housings. Housings in the:

- SYKC and SYL designs have oblong bolt holes, reinforced with zinc coated sheet steel or stainless steel inserts
- SYFL series have threaded stainless steel inserts in the support base

Fig. 6

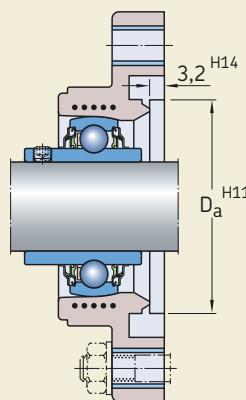


Fig. 7

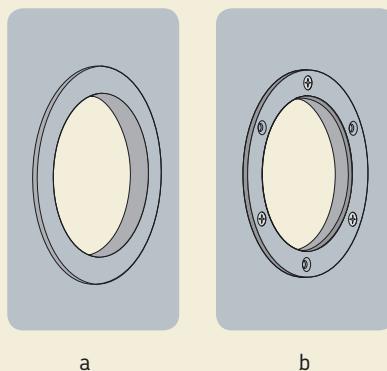
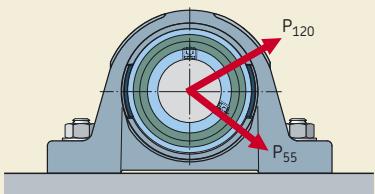



Fig. 8**Fig. 9**

If the loads acting on a housing are between 55° and 120° (→ **fig. 8**), Y-bearing plummer block units for the food industry should be doweled to the support surface, or stops should be provided in the direction of the load.

Flanged Y-bearing units for the food industry have two or four bolt holes through which they can be attached to their support surface with attachment bolts. The bolt holes are round and reinforced with stainless steel inserts.

In the absence of a centring shoulder and where heavy loads apply, SKF recommends doweling the housing to its support surface. For additional information, contact the SKF application engineering service.

Grease fills

Y-bearing units for the food industry are filled with a non-toxic, food-grade grease based on a PAO oil, containing an aluminium-complex soap as thickener (food industry approved USDA H1).

For additional information about lubricants and lubrication, refer to the section *Lubrication and maintenance*, starting on **page 48**.


End covers

For protection and safety reasons, units at the end of a shaft should have an end cover (→ **fig. 9**). The product tables show the end covers together with the units that they are compatible with. The designation of the end cover is shown, along with the distance that it protrudes from the housing.

End covers for the L and KC designs are available as accessories. Additionally, for the L design, covers incorporating a seal are available for through shafts.

For additional information about end covers, refer to the section *Design of Y-bearing arrangements*, **page 47**.


Y-bearing plummer block units for the food industry, metric shafts
d 20 – 40 mm

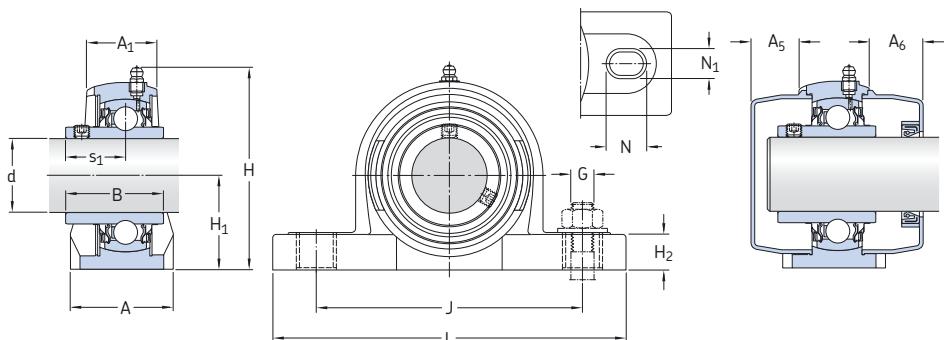

SYL

ECL and ECL .. B

Dimensions	d	A	A ₁	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Basic load ratings		Fatigue load limit P _u	Designation Bearing unit
														C	C ₀		
mm															kN	kN	–
20	38	22,5	31	65	33,3	14,2	95	127	14	11	10	18,3	10,8	6,55	0,28	SYL 20 TH	
	38	22,5	31	65	33,3	14,2	95	127	14	11	10	18,3	12,7	6,55	0,28	SYL 20 TR/VE495	
	32	21	31	64	33,3	16	96,5	126	17,5	12	10	18,3	10,8	6,55	0,28	SYKC 20 NTH	
	32	21	31	64	33,3	16	96,5	126	17,5	12	10	18,3	12,7	6,55	0,28	SYKC 20 NTR/VE495	
25	38	24,6	34,1	71	36,5	14,5	105	140	14	11	10	19,8	11,9	7,8	0,335	SYL 25 TH	
	38	24,6	34,1	71	36,5	14,5	105	140	14	11	10	19,8	14	7,8	0,335	SYL 25 TR/VE495	
	32	22	34,1	70,5	36,5	16	105	134	17,5	12	10	19,8	11,9	7,8	0,335	SYKC 25 NTH	
	32	22	34,1	70,5	36,5	16	105	134	17,5	12	10	19,8	14	7,8	0,335	SYKC 25 NTR/VE495	
30	46	26,3	38,1	83	42,9	17,8	119	162	18	14	12	22,2	16,3	11,2	0,475	SYL 30 TH	
	46	26,3	38,1	83	42,9	17,8	119	162	18	14	12	22,2	19,5	11,2	0,475	SYL 30 TR/VE495	
	40	25	38,1	82	42,9	19	121	159	21,5	14,5	12	22,2	16,3	11,2	0,475	SYKC 30 NTH	
	40	25	38,1	82	42,9	19	121	159	21,5	14,5	12	22,2	19,5	11,2	0,475	SYKC 30 NTR/VE495	
35	48	32,3	42,9	94	47,6	18	127	167	18	14	12	25,4	21,6	15,3	0,655	SYL 35 TH	
	48	32,3	42,9	94	47,6	18	127	167	18	14	12	25,4	25,5	15,3	0,655	SYL 35 TR/VE495	
	45	27	42,9	93	47,6	19	126	164	21,5	14,5	12	25,4	21,6	15,3	0,655	SYKC 35 NTH	
	45	27	42,9	93	47,6	19	126	164	21,5	14,5	12	25,4	25,5	15,3	0,655	SYKC 35 NTR/VE495	
40	54	36,3	49,2	98	49,2	19,5	137	184	18	14	12	30,2	24,7	19	0,8	SYL 40 TH	
	54	36,3	49,2	98	49,2	19,5	137	184	18	14	12	30,2	30,7	19	0,8	SYL 40 TR/VE495	
	48	30	49,2	99	49,2	19	136	176	21,5	14,5	12	30,2	24,7	19	0,8	SYKC 40 NTH	
	48	30	49,2	99	49,2	19	136	176	21,5	14,5	12	30,2	30,7	19	0,8	SYKC 40 NTR/VE495	

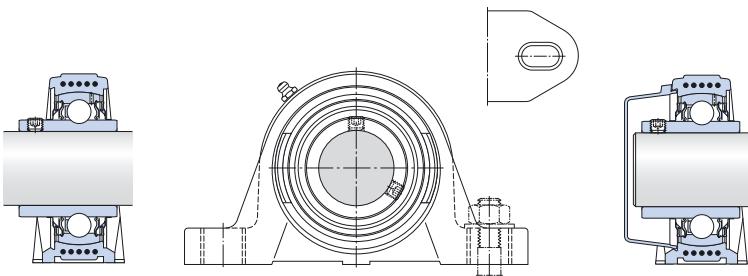


SYKC


ECY

Designations Bearing unit	Separate components		Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate covers		Dimension A ₅	Dimension A ₆
	Housing	Bearing			Designations End cover closed	Designations Cover open		
-	-	-	r/min	kg	-	-	mm	
SYL 20 TH	SYL 504	YAR 204-2RF/HV	5 000	0,27	ECL 204	ECL 204 B	20,5	20,5
SYL 20 TR/VE495	SYL 504	YAR 204-2RF/VE495	5 000	0,27	ECL 204	ECL 204 B	20,5	20,5
SYKC 20 NTH	SYKC 504 N	YAR 204-2RF/HV	5 000	0,24	ECY 204	-	18,5	-
SYKC 20 NTR/VE495	SYKC 504 N	YAR 204-2RFG/VE495	5 000	0,24	ECY 204	-	18,5	-
SYL 25 TH	SYL 505	YAR 205-2RF/HV	4 300	0,33	ECL 205	ECL 205 B	22	22
SYL 25 TR/VE495	SYL 505	YAR 205-2RF/VE495	4 300	0,33	ECL 205	ECL 205 B	22	22
SYKC 25 NTH	SYKC 505 N	YAR 205-2RF/HV	4 300	0,29	ECY 205	-	18	-
SYKC 25 NTR/VE495	SYKC 505 N	YAR 205-2RFG/VE495	4 300	0,29	ECY 205	-	18	-
SYL 30 TH	SYL 506	YAR 206-2RF/HV	3 800	0,52	ECL 206	ECL 206 B	27	27
SYL 30 TR/VE495	SYL 506	YAR 206-2RF/VE495	3 800	0,52	ECL 206	ECL 206 B	27	27
SYKC 30 NTH	SYKC 506 N	YAR 206-2RF/HV	3 800	0,49	ECY 206	-	20	-
SYKC 30 NTR/VE495	SYKC 506 N	YAR 206-2RFG/VE495	3 800	0,49	ECY 206	-	20	-
SYL 35 TH	SYL 507	YAR 207-2RF/HV	3 200	0,70	ECL 207	ECL 207 B	29	29
SYL 35 TR/VE495	SYL 507	YAR 207-2RF/VE495	3 200	0,70	ECL 207	ECL 207 B	29	29
SYKC 35 NTH	SYKC 507 N	YAR 207-2RF/HV	3 200	0,66	ECY 207	-	22	-
SYKC 35 NTR/VE495	SYKC 507 N	YAR 207-2RFG/VE495	3 200	0,66	ECY 207	-	22	-
SYL 40 TH	SYL 508	YAR 208-2RF/HV	2 800	0,92	ECL 208	ECL 208 B	30,5	33,5
SYL 40 TR/VE495	SYL 508	YAR 208-2RF/VE495	2 800	0,92	ECL 208	ECL 208 B	30,5	33,5
SYKC 40 NTH	SYKC 508 N	YAR 208-2RF/HV	2 800	0,86	ECY 208	-	23,5	-
SYKC 40 NTR/VE495	SYKC 508 N	YAR 208-2RFG/VE495	2 800	0,86	ECY 208	-	23,5	-

Y-bearing plummer block units for the food industry, inch shafts
d 3/4 – 1 1/2 in

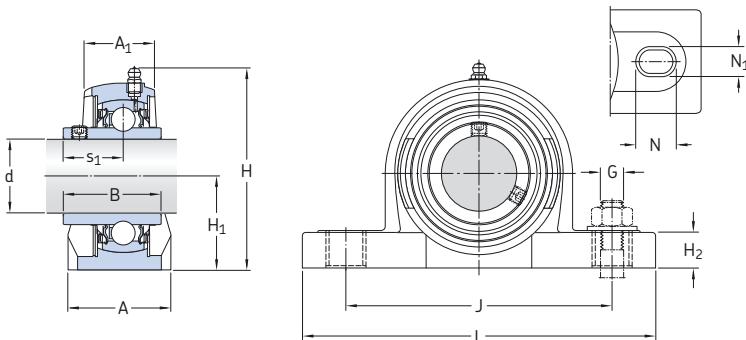

Dimensions	d	A	A ₁	B	H	H ₁	H ₂	J	L	N	N ₁	G	s ₁	Basic load ratings		Fatigue load limit P _u	Designation Bearing unit
														C	C ₀		
in/mm																	
3/4 19,05	1.50 38	0.89 22,5	1.22 31	2.56 65	1.31 33,3	0.56 14,2	3.74 95	5.00 127	0.55 14	0.43 11	3/8 10	0.72 18,3	2 430 10,8	1 470 6,55	60 0,28	SYL 3/4 TH	
1 25,4	1.50 38	0.97 24,6	1.34 34,1	2.80 71	1.44 36,5	0.57 14,5	4.13 105	5.51 140	0.55 14	0.43 11	3/8 10	0.78 19,8	2 680 11,9	1 760 7,8	80 0,335	SYL 1.TH	
1 1/4 31,75	1.89 48	1.27 32,3	1.69 42,9	3.70 94	1.87 47,6	0.71 18	5.00 127	6.57 167	0.71 18	0.55 14	1/2 12	1.00 25,4	4 860 21,6	3 440 15,3	150 0,655	SYL 1.1/4 TH	
1 1/2 38,1	2.13 54	1.43 36,3	1.94 49,2	3.86 98	1.94 49,2	0.77 19,5	5.39 137	7.24 184	0.71 18	0.55 14	1/2 12	1.19 30,2	5 560 24,7	4 280 19	180 0,8	SYL 1.1/2 TH	

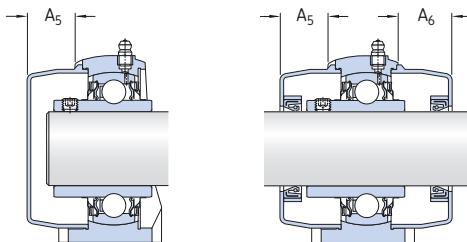


ECL


ECL .. B

Designations Bearing unit	Separate components		Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate covers		Dimension	
	Housing	Bearing			Designations	End cover closed	Cover open	
–			r/min	lb/kg	–	in/mm		
SYL 3/4 TH	SYL 504	YAR 204-012-2RF/HV	5 000	0.62 0,28	ECL 204	ECL 204-012 B	0.81 20,5	0.81 20,5
SYL 1.TH	SYL 505	YAR 205-100-2RF/HV	4 300	0.73 0,33	ECL 205	ECL 205-100 B	0.87 22	0.87 22
SYL 1.1/4 TH	SYL 507	YAR 207-104-2RF/HV	3 200	1.68 0,76	ECL 207	ECL 207-104 B	1.13 29	1.13 29
SYL 1.1/2 TH	SYL 508	YAR 208-108-2RF/HV	2 800	2.14 0,97	ECL 208	ECL 208-108 B	1.20 30,5	1.31 33,5

Y-bearing plummer block units with a short base for the food industry, metric shafts
d 20 – 40 mm

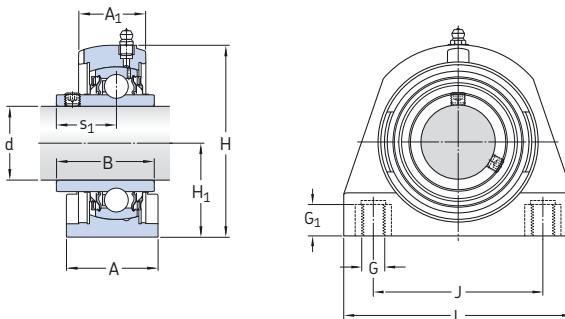

Dimensions	d	A	A ₁	B	H	H ₁	J	L	G	G ₁	s ₁	Basic load ratings		Fatigue load limit P _u	Designation Bearing unit
												dynamic C	static C ₀		
mm															
20	34,5 34,5	23,8 23,8	31 31	66 66	33,3 33,3	50,8 50,8	72,8 72,8	M 8 M 8	12 12	18,3 18,3	10,8 12,7	6,55 6,55	0,28 0,28	SYFL 20 TH SYFL 20 TR/VE495	
25	39,5 39,5	25,4 25,4	34,1 34,1	73,5 73,5	36,5 36,5	50,8 50,8	76,2 76,2	M 10 M 10	12 12	19,8 19,8	11,9 14	7,8 7,8	0,335 0,335	SYFL 25 TH SYFL 25 TR/VE495	
30	42,5 42,5	28 28	38,1 38,1	84 84	42,9 42,9	76,2 76,2	101 101	M 10 M 10	12 12	22,2 22,2	16,3 19,5	11,2 11,2	0,475 0,475	SYFL 30 TH SYFL 30 TR/VE495	
35	47,5 47,5	32,5 32,5	42,9 42,9	95 95	47,6 47,6	82,55 82,55	110 110	M 10 M 10	15,5 15,5	25,4 25,4	21,6 25,5	15,3 15,3	0,655 0,655	SYFL 35 TH SYFL 35 TR/VE495	
40	48 48	35 35	49,2 49,2	100,5 100,5	49,2 49,2	88,9 88,9	120 120	M 12 M 12	20 20	30,2 30,2	24,7 30,7	19 19	0,8 0,8	SYFL 40 TH SYFL 40 TR/VE495	

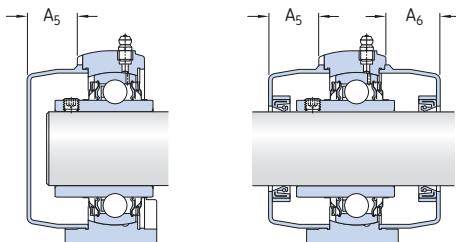


ECL


ECL .. B

Designations Bearing unit	Separate components		Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate covers		Dimension	
	Housing	Bearing			Designations	Designations	Dimension	
-	-	-	r/min	kg	-	-	mm	-
SYFL 20 TH	SYFL 504	YAR 204-2RF/HV	5 000	0,25	ECL 204	ECL 204 B	20,5	20,5
SYFL 20 TR/VE495	SYFL 504	YAR 204-2RF/VE495	5 000	0,25	ECL 204	ECL 204 B	20,5	20,5
SYFL 25 TH	SYFL 505	YAR 205-2RF/HV	4 300	0,32	ECL 205	ECL 205 B	22	22
SYFL 25 TR/VE495	SYFL 505	YAR 205-2RF/VE495	4 300	0,32	ECL 205	ECL 205 B	22	22
SYFL 30 TH	SYFL 506	YAR 206-2RF/HV	3 800	0,49	ECL 206	ECL 206 B	27	27
SYFL 30 TR/VE495	SYFL 506	YAR 206-2RF/VE495	3 800	0,49	ECL 206	ECL 206 B	27	27
SYFL 35 TH	SYFL 507	YAR 207-2RF/HV	3 200	0,67	ECL 207	ECL 207 B	29	29
SYFL 35 TR/VE495	SYFL 507	YAR 207-2RF/VE495	3 200	0,67	ECL 207	ECL 207 B	29	29
SYFL 40 TH	SYFL 508	YAR 208-2RF/HV	2 800	0,85	ECL 208	ECL 208 B	31,5	33,5
SYFL 40 TR/VE495	SYFL 508	YAR 208-2RF/VE495	2 800	0,85	ECL 208	ECL 208 B	31,5	33,5

Y-bearing plummer block units with a short base for the food industry, inch shafts
d 3/4 – 1 1/2 in

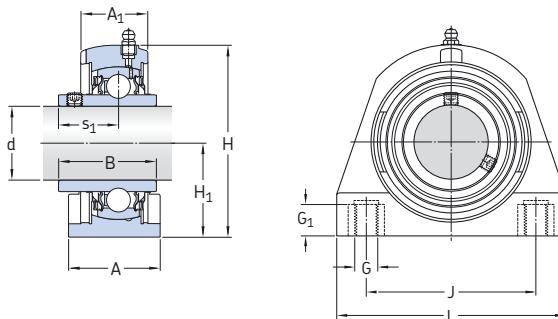

Dimensions	d	A	A ₁	B	H	H ₁	J	L	G	G ₁	s ₁	Basic load ratings		Fatigue load limit P _u	Designation Bearing unit			
												C	C ₀	dynamic	static			
in/mm																lbf/kN	lbf/kN	–
3/4 19,05	1.36 34,5	0.94 23,8	1.22 31	2.60 66	1.31 33,3	2 50,8	2.87 72,8	M 8 M 8	0.47 12	0.72 18,3	2 430 10,8	1 470 6,55	60 0,28		SYFL 3/4 TH			
1 25,4	1.56 39,5	1.00 25,4	1.34 34,1	2.89 73,5	1.44 36,5	2 50,8	3.00 76,2	M 10 M 10	0.47 12	0.78 19,8	2 680 11,9	1 760 7,8	80 0,335		SYFL 1. TH			
1 1/4 31,75	1.87 47,5	1.28 32,5	1.69 42,9	3.74 95	1.87 47,6	3.25 82,55	4.33 110	M 10 M 10	0.61 15,5	1.00 25,4	4 860 21,6	3 440 15,3	150 0,655		SYFL 1.1/4 TH			
1 1/2 38,1	1.89 48	1.38 35	1.94 49,2	3.96 100,5	1.94 49,2	3.50 88,9	4.72 120	M 12 M 12	0.79 20	1.19 30,2	5 560 24,7	4 280 19	180 0,8		SYFL 1.1/2 TH			

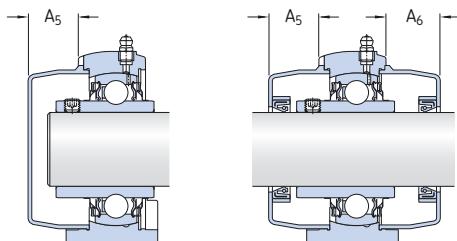


ECL


ECL .. B

Designations Bearing unit	Separate components		Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate covers		Dimension		
	Housing	Bearing			Designations	End cover closed	Cover open	A ₅	A ₆
–			r/min	lb/kg	–			in/mm	
SYFL 3/4 TH	SYFL 504	YAR 204-012-2RF/HV	5 000	0.57 0,26	ECL 204	ECL 204-012 B	0.81 20,5	0.81 20,5	
SYFL 1. TH	SYFL 505	YAR 205-100-2RF/HV	4 300	0.71 0,32	ECL 205	ECL 205-100 B	0.87 22	0.87 22	
SYFL 1.1/4 TH	SYFL 507	YAR 207-104-2RF/HV	3 200	1.60 0,73	ECL 207	ECL 207-104 B	1.13 29	1.13 29	
SYFL 1.1/2 TH	SYFL 508	YAR 208-108-2RF/HV	2 800	2 0,90	ECL 208	ECL 208-108 B	1.24 31,5	1.31 33,5	

**Flanged Y-bearing units with a housing with a square flange for the food industry, metric shafts
d 20 – 40 mm**

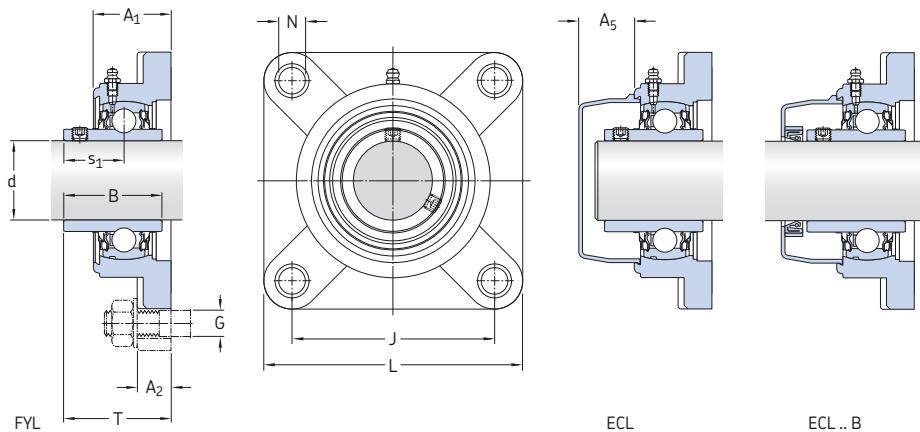

Dimensions	d	A ₁	A ₂	B	D _a	J	L	N	G	s ₁	T	Basic load ratings		Fatigue load static P _u	Limiting speed limit tolerance h6	Designation Bearing unit with shaft
												C	C ₀			
	mm											kN	kN	r/min	–	
20	27,8	13,4	31	–	63,5	86	11	10	18,3	36,3	10,8	6,55	0,28	5 000	FYL 20 THR	
	27,8	13,4	31	–	63,5	86	11	10	18,3	36,3	12,7	6,55	0,28	5 000	FYL 20 TR/VE495	
	30	15	31	68,3	63,5	86	12	10	18,3	37,3	10,8	6,55	0,28	5 000	FYKC 20 NTH	
	30	15	31	68,3	63,5	86	12	10	18,3	37,3	12,7	6,55	0,28	5 000	FYKC 20 NTR/VE495	
25	28	14,3	34,1	–	70	95	11	10	19,8	36,7	11,9	7,8	0,335	4 300	FYL 25 THR	
	28	14,3	34,1	–	70	95	11	10	19,8	36,7	14	7,8	0,335	4 300	FYL 25 TR/VE495	
	31	15	34,1	74,6	70	95	12	10	19,8	38,8	11,9	7,8	0,335	4 300	FYKC 25 NTH	
	31	15	34,1	74,6	70	95	12	10	19,8	38,8	14	7,8	0,335	4 300	FYKC 25 NTR/VE495	
30	31,5	14,3	38,1	–	83	107	11	10	22,2	41,4	16,3	11,2	0,475	3 800	FYL 30 THR	
	31,5	14,3	38,1	–	83	107	11	10	22,2	41,4	19,5	11,2	0,475	3 800	FYL 30 TR/VE495	
	33	15,3	38,1	93,7	82,5	108	12	10	22,2	42,2	16,3	11,2	0,475	3 800	FYKC 30 NTH	
	33	15,3	38,1	93,7	82,5	108	12	10	22,2	42,2	19,5	11,2	0,475	3 800	FYKC 30 NTR/VE495	
35	34,8	15,5	42,9	–	92	118	13	12	25,4	46,9	21,6	15,3	0,655	3 200	FYL 35 THR	
	34,8	15,5	42,9	–	92	118	13	12	25,4	46,9	25,5	15,3	0,655	3 200	FYL 35 TR/VE495	
	35	17	42,9	106,4	92	118	14,5	12	25,4	46,4	21,6	15,3	0,655	3 200	FYKC 35 NTH	
	35	17	42,9	106,4	92	118	14,5	12	25,4	46,4	25,5	15,3	0,655	3 200	FYKC 35 NTR/VE495	
40	37,5	17	49,2	–	102	130	14	12	30,2	53,2	24,7	19	0,8	2 800	FYL 40 THR	
	37,5	17	49,2	–	102	130	14	12	30,2	53,2	30,7	19	0,8	2 800	FYL 40 TR/VE495	
	39	17	49,2	115,9	101,5	130	14,5	12	30,2	54,2	24,7	19	0,8	2 800	FYKC 40 NTH	
	39	17	49,2	115,9	101,5	130	14,5	12	30,2	54,2	30,7	19	0,8	2 800	FYKC 40 NTR/VE495	

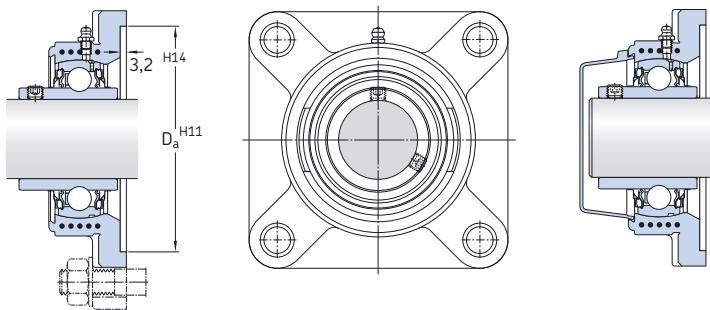


FYKC


ECY

Designations Bearing unit	Separate components Housing	Bearing	Mass Bearing unit	Appropriate covers Designations End cover closed	Cover open	Dimension A_5
–	–	kg	–	–	mm	–
FYL 20 THR	FYL 504	YAR 204-2RFGR/HV	0,28	ECL 204	ECL 204 B	20,5
FYL 20 TR/VE495	FYL 504	YAR 204-2RF/VE495	0,28	ECL 204	ECL 204 B	20,5
FYKC 20 NTH	FYKC 504 N	YAR 204-2RF/HV	0,26	ECY 204	–	18,5
FYKC 20 NTR/VE495	FYKC 504 N	YAR 204-2RFG/VE495	0,26	ECY 204	–	18,5
FYL 25 THR	FYL 505	YAR 205-2RFGR/HV	0,34	ECL 205	ECL 205 B	22
FYL 25 TR/VE495	FYL 505	YAR 205-2RF/VE495	0,34	ECL 205	ECL 205 B	22
FYKC 25 NTH	FYKC 505 N	YAR 205-2RF/HV	0,33	ECY 205	–	18
FYKC 25 NTR/VE495	FYKC 505 N	YAR 205-2RFG/VE495	0,33	ECY 205	–	18
FYL 30 THR	FYL 506	YAR 206-2RFGR/HV	0,47	ECL 206	ECL 206 B	27
FYL 30 TR/VE495	FYL 506	YAR 206-2RF/VE495	0,46	ECL 206	ECL 206 B	27
FYKC 30 NTH	FYKC 506 N	YAR 206-2RF/HV	0,48	ECY 206	–	20
FYKC 30 NTR/VE495	FYKC 506 N	YAR 206-2RFG/VE495	0,48	ECY 206	–	20
FYL 35 THR	FYL 507	YAR 207-2RFGR/HV	0,67	ECL 207	ECL 207 B	29
FYL 35 TR/VE495	FYL 507	YAR 207-2RF/VE495	0,67	ECL 207	ECL 207 B	29
FYKC 35 NTH	FYKC 507 N	YAR 207-2RF/HV	0,66	ECY 207	–	22
FYKC 35 NTR/VE495	FYKC 507 N	YAR 207-2RFG/VE495	0,66	ECY 207	–	22
FYL 40 THR	FYL 508	YAR 208-2RFGR/HV	0,91	ECL 208	ECL 208 B	33,5
FYL 40 TR/VE495	FYL 508	YAR 208-2RF/VE495	0,91	ECL 208	ECL 208 B	33,5
FYKC 40 NTH	FYKC 508 N	YAR 208-2RF/HV	0,87	ECY 208	–	23,5
FYKC 40 NTR/VE495	FYKC 508 N	YAR 208-2RFG/VE495	0,87	ECY 208	–	23,5

Flanged Y-bearing units with a housing with a square flange for the food industry, inch shafts
d 3/4 – 1 1/2 in

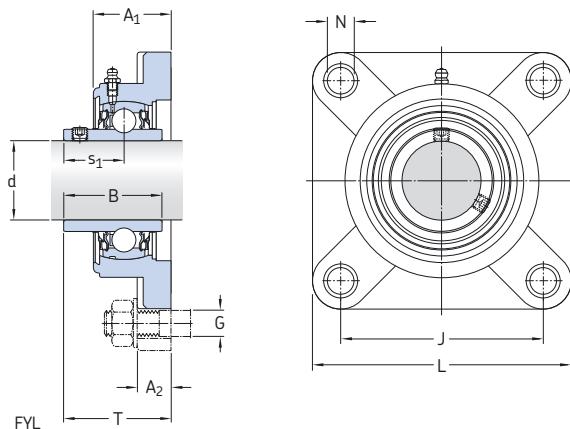

Dimensions	d	A ₁	A ₂	B	J	L	N	G	s ₁	T	Basic load ratings		Fatigue load limit P _u	Limiting speed with shaft tolerance	Designation Bearing unit
											dynamic C	static C ₀			
in/mm															
3/4 19,05	1.09 27,8	0.53 13,4	1.22 31	2.50 63,5	3.39 86	0.43 11	3/8 10	0.72 18,3	1.43 36,3	2 430 10,8	1 470 6,55	60 0,28	5 000	FYL 3/4 THR	
1 25,4	1.10 28	0.56 14,3	1.34 34,1	2.76 70	3.74 95	0.43 11	3/8 10	0.78 19,8	1.44 36,7	2 680 11,9	1 760 7,8	80 0,335	4 300	FYL 1. THR	
1 1/4 31,75	1.37 34,8	0.61 15,5	1.69 42,9	3.62 92	4.65 118	0.51 13	1/2 12	1.00 25,4	1.85 46,9	4 860 21,6	3 440 15,3	150 0,655	3 200	FYL 1.1/4 THR	
1 1/2 38,1	1.48 37,5	0.67 17	1.94 49,2	4.02 102	5.12 130	0.55 14	1/2 12	1.19 30,2	2.09 53,2	5 560 24,7	4 280 19	180 0,8	2 800	FYL 1.1/2 THR	

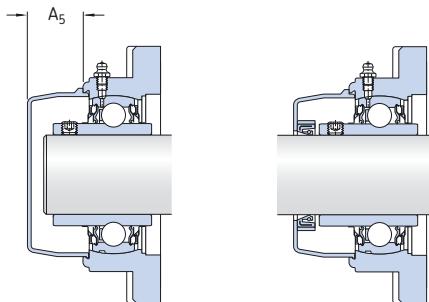


ECL

ECL .. B


Designations Bearing unit	Separate components		Mass Bearing unit	Appropriate covers		Dimension A ₅
	Housing	Bearing		Designations	End cover closed	
–	–		lb/kg	–	in/mm	
FYL 3/4 THR	FYL 504	YAR 204-012-2RFGR/HV	0.60 0,28	ECL 204	ECL 204-012 B	0.81 20,5
FYL 1. THR	FYL 505	YAR 205-100-2RFGR/HV	0.75 0,34	ECL 205	ECL 205-100 B	0.87 22
FYL 1.1/4 THR	FYL 507	YAR 207-104-2RFGR/HV	1.60 0,73	ECL 207	ECL 207-104 B	1.13 29
FYL 1.1/2 THR	FYL 508	YAR 208-108-2RFGR/HV	2.10 0,95	ECL 208	ECL 208-108 B	1.31 33,5

**Flanged Y-bearing units with a housing with an oval flange for the food industry, metric shafts
d 20 – 40 mm**

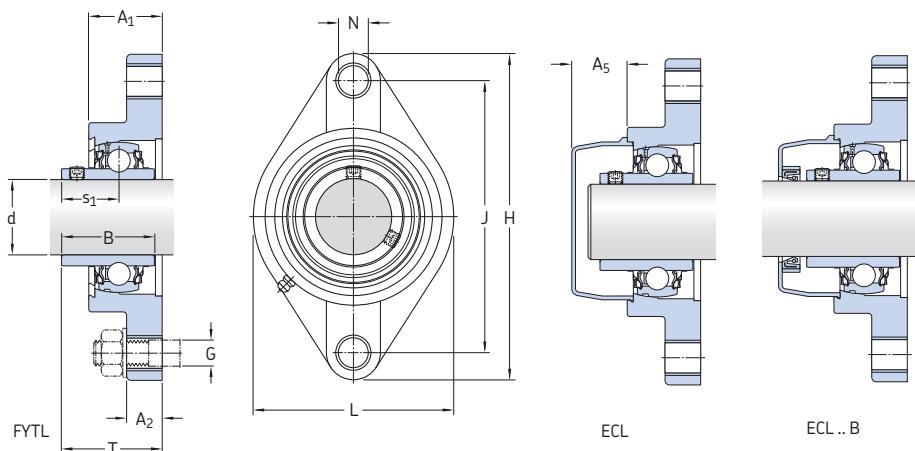

Dimensions

d	A ₁	A ₂	B	D _a	H	J	L	N	G	s ₁	T	Basic load ratings		Fatigue load limit P _u	Designation Bearing unit
												C	C ₀		
mm															
20	26,5	11,4	31	—	113	90	65	11	10	18,3	33,3	10,8	6,55	0,28	FYTL 20 THR
	26,5	11,4	31	—	113	90	65	11	10	18,3	33,3	12,7	6,55	0,28	FYTL 20 TR/VE495
	29,5	15	31	50,8	112	90	60,5	12	10	18,3	37,3	10,8	6,55	0,28	FYTAKC 20 NTH
	29,5	15	31	50,8	112	90	60,5	12	10	18,3	37,3	12,7	6,55	0,28	FYTAKC 20 NTR/VE495
25	29,1	13,5	34,1	—	130	99	70	11	10	19,8	35,8	11,9	7,8	0,335	FYTL 25 THR
	29,1	13,5	34,1	—	130	99	70	11	10	19,8	35,8	14	7,8	0,335	FYTL 25 TR/VE495
	30	15	34,1	63,5	124	99	70	12	10	19,8	38,8	11,9	7,8	0,335	FYTAKC 25 NTH
	30	15	34,1	63,5	124	99	70	12	10	19,8	38,8	14	7,8	0,335	FYTAKC 25 NTR/VE495
30	30,5	13,3	38,1	—	148	117	80	11	10	22,2	40,2	16,3	11,2	0,475	FYTL 30 THR
	30,5	13,3	38,1	—	148	117	80	11	10	22,2	40,2	19,5	11,2	0,475	FYTL 30 TR/VE495
	33	15	38,1	76,2	142,5	116,5	83	12	10	22,2	42,2	16,3	11,2	0,475	FYTAKC 30 NTH
	33	15	38,1	76,2	142,5	116,5	83	12	10	22,2	42,2	19,5	11,2	0,475	FYTAKC 30 NTR/VE495
35	32,8	16,1	42,9	—	163	130	90	13	12	25,4	44,4	21,6	15,3	0,655	FYTL 35 THR
	32,8	16,1	42,9	—	163	130	90	13	12	25,4	44,4	25,5	15,3	0,655	FYTL 35 TR/VE495
	35	17	42,9	88,9	156	130	96	14,5	12	25,4	46,4	21,6	15,3	0,655	FYTAKC 35 NTH
	35	17	42,9	88,9	156	130	96	14,5	12	25,4	46,4	25,5	15,3	0,655	FYTAKC 35 NTR/VE495
40	37,5	20	49,2	—	176	144	100	14	12	30,2	51,2	24,7	19	0,8	FYTL 40 THR
	37,5	20	49,2	—	176	144	100	14	12	30,2	51,2	30,7	19	0,8	FYTL 40 TR/VE495

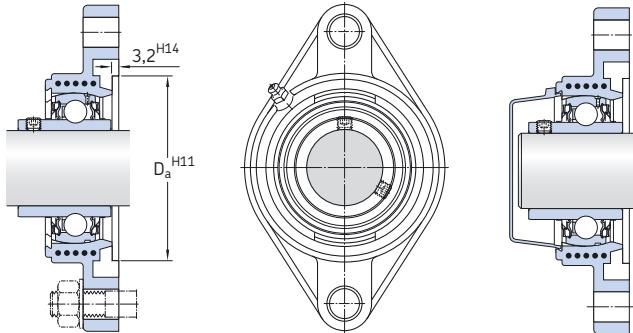


FYTL

ECY


6.9

Designations Bearing unit	Separate components Housing	Bearing	Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate covers Designations End cover closed	Cover open	Dimension A5
-	-	-	r/min	kg	-	-	mm
FYTL 20 THR	FYTL 504	YAR 204-2RFGR/HV	5 000	0,23	ECL 204	ECL 204 B	20,5
FYTL 20 TR/VE495	FYTL 504	YAR 204-2RF/VE495	5 000	0,23	ECL 204	ECL 204 B	20,5
FYTBK C 20 NTH	FYTBK C 504 N	YAR 204-2RF/HV	5 000	0,24	ECY 204	-	18,5
FYTBK C 20 NTR/VE495	FYTBK C 504 N	YAR 204-2RFG/VE495	5 000	0,24	ECY 204	-	18,5
FYTL 25 THR	FYTL 505	YAR 205-2RFGR/HV	4 300	0,28	ECL 205	ECL 205 B	22
FYTL 25 TR/VE495	FYTL 505	YAR 205-2RF/VE495	4 300	0,28	ECL 205	ECL 205 B	22
FYTBK C 25 NTH	FYTBK C 505 N	YAR 205-2RF/HV	4 300	0,29	ECY 205	-	18
FYTBK C 25 NTR/VE495	FYTBK C 505 N	YAR 205-2RFG/VE495	4 300	0,29	ECY 205	-	18
FYTL 30 THR	FYTL 506	YAR 206-2RFGR/HV	3 800	0,42	ECL 206	ECL 206 B	27
FYTL 30 TR/VE495	FYTL 506	YAR 206-2RF/VE495	3 800	0,42	ECL 206	ECL 206 B	27
FYTBK C 30 NTH	FYTBK C 506 N	YAR 206-2RF/HV	3 800	0,44	ECY 206	-	20
FYTBK C 30 NTR/VE495	FYTBK C 506 N	YAR 206-2RFG/VE495	3 800	0,44	ECY 206	-	20
FYTL 35 THR	FYTL 507	YAR 207-2RFGR/HV	3 200	0,58	ECL 207	ECL 207 B	29
FYTL 35 TR/VE495	FYTL 507	YAR 207-2RF/VE495	3 200	0,58	ECL 207	ECL 207 B	29
FYTBK C 35 NTH	FYTBK C 507 N	YAR 207-2RF/HV	3 200	0,61	ECY 207	-	22
FYTBK C 35 NTR/VE495	FYTBK C 507 N	YAR 207-2RFG/VE495	3 200	0,61	ECY 207	-	22
FYTL 40 THR	FYTL 508	YAR 208-2RFGR/HV	2 800	0,79	ECL 208	ECL 208 B	33,5
FYTL 40 TR/VE495	FYTL 508	YAR 208-2RF/VE495	2 800	0,79	ECL 208	ECL 208 B	33,5


Flanged Y-bearing units with a housing with an oval flange for the food industry, inch shafts
d 3/4 – 1 1/2 in

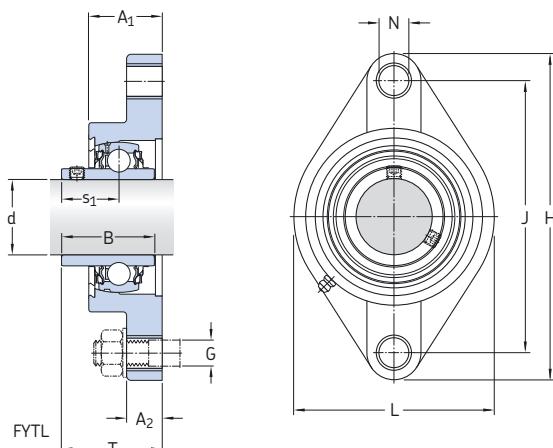

Dimensions	d	A ₁	A ₂	B	H	J	L	N	G	s ₁	T	Basic load ratings		Fatigue load limit P _u	Designation Bearing unit
												C	C ₀		
in/mm												lbf/kN	lbf/kN	–	
3/4 19,05	1.04 26,5	0.45 11,4	1.22 31	4.45 113	3.54 90	2.55 64,8	0.43 11	3/8 10	0.72 18,3	1.31 33,3		2 430 10,8	1 470 6,55	60 0,28	FYTL 3/4 THR
1 25,4	1.15 29,1	0.53 13,5	1.34 34,1	5.12 130	3.90 99	2.76 70	0.43 11	3/8 10	0.78 19,8	1.41 35,8		2 680 11,9	1 760 7,8	80 0,335	FYTL 1.THR
1 1/4 31,75	1.29 32,8	0.63 16,1	1.69 42,9	6.42 163	5.12 130	3.54 90	0.51 13	1/2 12	1.00 25,4	1.75 44,4		4 860 21,6	3 440 15,3	150 0,655	FYTL 1.1/4 THR
1 1/2 38,1	1.48 37,5	0.79 20	1.94 49,2	6.93 176	5.67 144	3.94 100	0.55 14	1/2 12	1.19 30,2	2.02 51,2		5 560 24,7	4 280 19	180 0,8	FYTL 1.1/2 THR




ECL




ECL.. B

Designations Bearing unit	Separate components		Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate covers		Dimension A5
	Housing	Bearing			Designations	End cover closed	
-	-	-	r/min	lb/kg	-	-	in/mm
FYTL 3/4 THR	FYTL 504	YAR 204-012-2RFGR/HV	5 000	0,51 0,23	ECL 204	ECL 204-012 B	0,81 20,5
FYTL 1. THR	FYTL 505	YAR 205-100-2RFGR/HV	4 300	0,62 0,28	ECL 205	ECL 205-100 B	0,87 22
FYTL 1.1/4 THR	FYTL 507	YAR 207-104-2RFGR/HV	3 200	1,41 0,64	ECL 207	ECL 207-104 B	1,13 29
FYTL 1.1/2 THR	FYTL 508	YAR 208-108-2RFGR/HV	2 800	1,85 0,84	ECL 208	ECL 208-108 B	1,31 33,5

Y-bearing take-up units for the food industry, metric shafts
d 20 – 40 mm

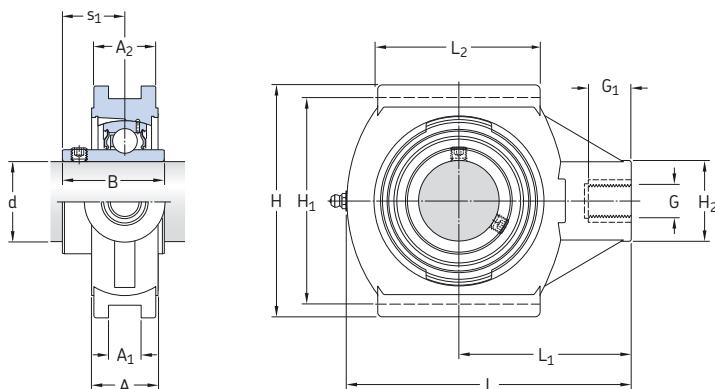

Dimensions	d	A	A ₁	A ₂	B	H	H ₁	H ₂	L	L ₁	L ₂	G	G ₁	s ₁	Basic load ratings		Fatigue load limit P _u	Designation Bearing unit	
															C	C ₀			
	mm															kN		kN	–
20	27,6	12	24,5	31	88	76	36	99	64	46	M 16	21	18,3	10,8	6,55	0,28	TUL 20 TH		
	27,6	12	24,5	31	88	76	36	99	64	46	M 16	21	18,3	12,7	6,55	0,28	TUL 20 TR/VE495		
25	27,5	12	24,5	34,1	88	76	36	99	64	46	M 16	21	19,8	11,9	7,8	0,335	TUL 25 TH		
	27,5	12	24,5	34,1	88	76	36	99	64	46	M 16	21	19,8	14	7,8	0,335	TUL 25 TR/VE495		
30	34,6	12	30	38,1	102	89	40	125	76	63,5	M 16	21	22,2	16,3	11,2	0,475	TUL 30 TH		
	34,6	12	30	38,1	102	89	40	125	76	63,5	M 16	21	22,2	19,5	11,2	0,475	TUL 30 TR/VE495		
35	34,6	12	30	42,9	102	89	40	125	76	63,5	M 16	21	25,4	21,6	15,3	0,655	TUL 35 TH		
	34,6	12	30	42,9	102	89	40	125	76	63,5	M 16	21	25,4	25,5	15,3	0,655	TUL 35 TR/VE495		
40	33,4	16	32	49,2	114	102	40	140	85	80	M 16	21	30,2	24,7	19	0,8	TUL 40 TH		
	33,4	16	32	49,2	114	102	40	140	85	80	M 16	21	30,2	30,7	19	0,8	TUL 40 TR/VE495		

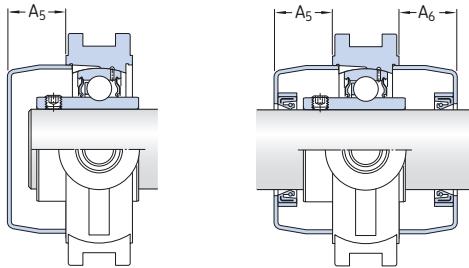


ECL


ECL .. B

Designations Bearing unit	Separate components		Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate covers		Dimension
	Housing	Bearing			Designations	End cover closed	
-			r/min	kg	-	mm	
TUL 20 TH	TUL 504	YAR 204-2RF/HV	5 000	0,32	ECL 204	ECL 204 B	16,5 20,5
TUL 20 TR/VE495	TUL 504	YAR 204-2RF/VE495	5 000	0,32	ECL 204	ECL 204 B	16,5 20,5
TUL 25 TH	TUL 505	YAR 205-2RF/HV	4 300	0,37	ECL 205	ECL 205 B	19 22
TUL 25 TR/VE495	TUL 505	YAR 205-2RF/VE495	4 300	0,37	ECL 205	ECL 205 B	19 22
TUL 30 TH	TUL 506	YAR 206-2RF/HV	3 800	0,60	ECL 206	ECL 206 B	21,5 27
TUL 30 TR/VE495	TUL 506	YAR 206-2RF/VE495	3 800	0,60	ECL 206	ECL 206 B	21,5 27
TUL 35 TH	TUL 507	YAR 207-2RF/HV	3 200	0,73	ECL 207	ECL 207 B	29 29
TUL 35 TR/VE495	TUL 507	YAR 207-2RF/VE495	3 200	0,73	ECL 207	ECL 207 B	29 29
TUL 40 TH	TUL 508	YAR 208-2RF/HV	2 800	0,88	ECL 208	ECL 208 B	33,5 33,5
TUL 40 TR/VE495	TUL 508	YAR 208-2RF/VE495	2 800	0,88	ECL 208	ECL 208 B	33,5 33,5

Y-bearing take-up units for the food industry, inch shafts
d 3/4 – 1 1/2 in

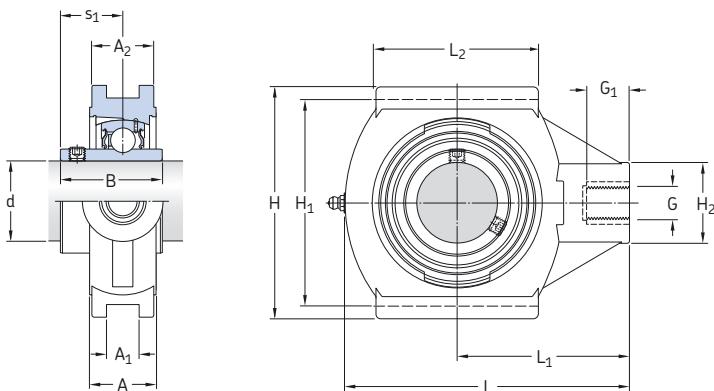

Dimensions	d	A	A ₁	A ₂	B	H	H ₁	H ₂	L	L ₁	L ₂	G	G ₁	s ₁	Basic load ratings		Fatigue load limit P _u	Designation Bearing unit
															C	C ₀		
in/mm																		
3/4 19,05	1.09 27,6	0.47 12	0.96 24,5	1.22 31	3.46 88	2.99 76	1.42 36	3.90 99	2.52 64	1.81 46	M 16 M 16	0.83 21	0.72 18,3	2 430 10,8	1 470 6,55	60 0,28	TUL 3/4 TH	
1 25,4	1.08 27,5	0.47 12	0.96 24,5	1.34 34,1	3.46 88	2.99 76	1.42 36	3.90 99	2.52 64	1.81 46	M 16 M 16	0.83 21	0.78 19,8	2 680 11,9	1 760 7,8	80 0,335	TUL 1. TH	
1 1/4 31,75	1.36 34,6	0.47 12	1.18 30	1.69 42,9	4.02 102	3.50 89	1.57 40	4.92 125	2.99 76	2.50 63,5	M 16 M 16	0.83 21	1.00 25,4	4 860 21,6	3 440 15,3	150 0,655	TUL 1.1/4 TH	
1 1/2 38,1	1.31 33,4	0.63 16	1.26 32	1.94 49,2	4.49 114	4.02 102	1.57 40	5.51 140	3.35 85	3.15 80	M 16 M 16	0.83 21	1.19 30,2	5 560 24,7	4 280 19	180 0,8	TUL 1.1/2 TH	

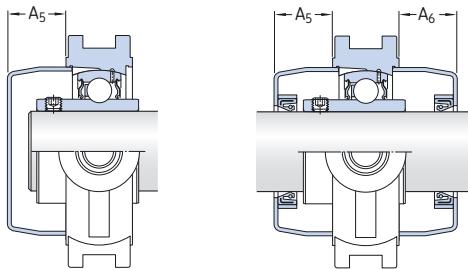

ECL ..

ECL .. B

Designations Bearing unit	Separate components		Limiting speed with shaft tolerance h6	Mass Bearing unit	Appropriate covers		Dimension	
	Housing	Bearing			Designations	End cover closed	Cover open	A ₅
-			r/min	lb/kg	-			in/mm
TUL 3/4 TH	TUL 504	YAR 204-012-2RF/HV	5 000	0.73 0,33	ECL 204	ECL 204-012 B	0.65 16,5	0.81 20,5
TUL 1. TH	TUL 505	YAR 205-100-2RF/HV	4 300	0.82 0,37	ECL 205	ECL 205-100 B	0.75 19	0.87 22
TUL 1.1/4 TH	TUL 507	YAR 207-104-2RF/HV	3 200	1.74 0,79	ECL 207	ECL 207-104 B	1.13 29	1.13 29
TUL 1.1/2 TH	TUL 508	YAR 208-108-2RF/HV	2 800	2.05 0,93	ECL 208	ECL 208-108 B	1.31 33,5	1.31 33,5



Other related SKF products

SKF ConCentra roller bearing units	302
Collar mounted roller bearing units for inch shafts.....	303
Two-bearing units	304
Bearing housings	305
Bearing greases	306
Products for maintenance	306
Condition monitoring	307
SKF technology and service solutions	307
Condition monitoring products.....	307

SKF ConCentra roller bearing units

The standard product line of SKF ConCentra roller bearing units with the SKF ConCentra locking technology includes SYNT plummer (pillow) block units and FYNT flanged housing units for metric shafts ranging from 35 to 100 mm diameter. To be able to truly meet the needs of each application, they are available:

- with low friction double lip seals, heavy duty garter spring seals as well as non-contact labyrinth seals
- as locating (held) or non-locating (free) bearing units

To complement the standard metric range, SKF ConCentra roller bearing units are also available for inch shafts ranging from 1 7/16 to 4 inch as:

- plummer block units in the SYR .. N, SYE .. N and FSYE .. N series
- flanged housing units in the FYR...N and FYRP...N series

These units are dimensionally interchangeable with other inch dimension products.

For additional information about SKF ConCentra roller bearing units with a plummer block housing, refer to the catalogue *SKF ConCentra roller bearing units* or the *SKF Interactive Engineering Catalogue*, available online at www.skf.com.



The boundary dimensions of SKF ConCentra roller bearing units match those of the respective competitors' products as follows:

- Plummer block units in the SYR series match those in the P2B-SN 2000, ZA as well as P(E)-B22400 H series.
- Plummer block units in the SYE and FSYE series match those in the E, EP-B22400H or EPB22400FH and ZEP series.

Collar mounted roller bearing units for inch shafts

In addition to SKF ConCentra roller bearing units, the SKF bearing unit range also includes collar mounted:

- plummer block units in the SYR, SYE and FSYE series
- flanged units in the FYE, FYR and FYRP series
- take-up units in the TBR series

These bearing units are held in place with a locking collar and two grub (set) screws that grip the shaft through drilled holes in the inner ring.

For additional information, refer to the *Interactive SKF Engineering Catalogue*, available online at www.skf.com.



The boundary dimensions of SKF collar mounted roller bearing units match those of the respective competitors' products as follows:

- Plummer block units in the SYR series match those in the PB24400H, S2000 and ZA series.
- Plummer block units in the SYE and FSYE series match those in the E, EPB22400H or EPB22400FH and ZEP series.
- Flanged units in the FYR series match those in the ZB, FB22400H and S2000 E series.
- Flanged units in the FYRP series match those in the ZBR, FCB22400H and S2000E series.
- Take-up units in the TBR series match those in the ZT2000, ZT5000, TB22400H and S2000 E series.

Two-bearing units

Two-bearing units have several advantages over the more conventional bearing arrangements where two bearings are mounted in separate plummer block housings. These include:

- a more compact design, because there is only one housing
- improved running accuracy, because stiff bearings can be used
- quiet operation, because the bearings supporting the shaft are contained in a single housing and bearing alignment is accurate
- easy installation, because it is only necessary to bolt the unit to its support surface and the other components need only be mounted on the already finished shaft ends, virtually eliminating the risk of contaminating or otherwise damaging the bearings during installation

Additional benefits include the cost savings associated with fewer components to order, stock and replace.

The trend toward higher flows in fan applications involves increasing shaft speeds, and this tends to increase axial loads. To accommodate these heavier axial loads, the SKF standard range also includes two-bearing units incorporating two bearings on the locating side.

For additional information, refer to the *SKF Interactive Engineering Catalogue*, available online at www.skf.com.



Bearing housings

If the application or operating conditions exceed the capabilities of bearing units, standard bearing housings containing self-aligning ball or roller bearings can be used. These cost-effective housings and bearings can provide reliable performance, even under extreme conditions.

As a leading supplier of rolling bearings, SKF produces housings in a wide range of designs and sizes that are based on experience collected in all industrial areas. Among others, SKF housings have the following advantages:

- large assortment of design and sizes
- high quality of design and manufacture
- worldwide availability

Plummer (pillow) block housings in the SNL 2, 3, 5, 6, 30, 31, 32 and 40 series are the most common housings and have additional advantages:

- short delivery times
- long term supply stability
- no minimum order quantities
- simplified ordering and stocking

For additional information, refer to the SKF *Interactive Engineering Catalogue*, available online at www.skf.com.

Other bearing housings in the SKF standard range, include:

- split plummer block housings
- one-piece plummer block housings
- flanged housings
- take-up housings

For detailed information about these housings, contact the SKF application engineering service.



Bearing greases

Whatever the bearing arrangement, it consists of more than just a bearing or bearing unit. There are components like the shaft, seals, holding devices and the lubricant that must all work together in order for the bearing to realize maximum service life. The lubricant is an extremely important factor in the equation for long service life – which is why SKF offers a wide variety of bearing greases, each designed and formulated for a particular type of application or environment. For applications running under “normal” conditions, most ball and roller bearing units can be relubricated using one of the following SKF greases:

- LGWA grease for a wide temperature range
- LGMT 2 and LGMT 3 multi-purpose greases
- LGEP 2 high-pressure grease
- LGFP 2 food-grade grease

For detailed information about SKF bearing greases, refer to the catalogue *SKF Maintenance and Lubrication Products* or visit www.mapro.skf.com.



Products for maintenance

In addition to bearings and seals, SKF also carries a full line of maintenance and lubrication tools and supplies such as:

- hook spanners with an external tab, HN series
- spanner sets for sleeve nuts, TMHN series
- grease guns
- grease meters
- automatic lubricators



For detailed information about SKF products for mounting and maintenance, refer to the catalogue *SKF Maintenance and Lubrication Products* or visit www.mapro.skf.com.

Condition monitoring

The thorough understanding of machine components, systems and related processes, enables SKF to create and provide realistic solutions for optimum machine and process reliability and productivity.

Close working partnerships with customers worldwide has provided SKF with an extensive knowledge of applications in virtually every industry. As a result, SKF has learned to apply the most relevant of today's emerging technologies to industry-specific applications.

SKF technology and service solutions

SKF Reliability Systems offers the most important services and products to provide solutions to the real-life application conditions. The goal is to help customers reduce total machine-related costs, enhance productivity and strengthen profitability. Whatever the requirements, SKF offers the knowledge, services and products needed to achieve specific business goals.

For detailed information about the SKF Reliability Systems programme, refer to publication *The Guide to Asset Efficiency Optimization for Improved Profitability* or visit www.skfreliability.com to see the latest information on strategies and services.

Condition monitoring products

At the core of the SKF product range are the vibration detection, analysis and diagnostic products, which enable process monitoring as an added benefit. More information about SKF condition monitoring products is available online at www.skf.com.

Besides products for vibration detection, the SKF range of products includes all instruments needed to:

- measure temperature, speed or noise level
- align shafts or pulleys
- check oil contamination

This product line includes small hand-held devices as well as complex monitoring systems for stationary installation and continuous monitoring in combination with preventive maintenance.





Product index

The product range listed in this catalogue includes almost 1 000 Y-bearings, Y-bearing units, Y-bearing housings, rubber seating rings, end covers and adapter sleeves. In order to enable the user to quickly find the technical data for a product known only by its designation, the products are listed by designation in alphanumerical order in this index. Each entry lists the page number on which the product can be found and gives a brief description of the product.

Product index

Designation	Product	Product table No.	Page
17262..	Y-bearing with a standard inner ring	2.4	106
17263..	Y-bearing with a standard inner ring	2.4	106
ECL 2..	End cover for the food industry	6.6	280
	End cover for the food industry	6.7	284
	End cover for the food industry	6.8	288
	End cover for the food industry	6.9	292
	End cover for the food industry	6.10	296
ECL 2.. B	Open cover for the food industry	6.6	280
	Open cover for the food industry	6.7	284
	Open cover for the food industry	6.8	288
	Open cover for the food industry	6.9	292
	Open cover for the food industry	6.10	296
ECY 2..	End cover	3.1	120
	End cover	3.2	122
	End cover	3.3	134
	End cover	4.1	174
	End cover	4.2	176
	End cover	4.3	178
	End cover	4.4	188
	End cover	4.6	200
	End cover	4.7	208
	End cover	5.1	238
	End cover	5.2	244
	End cover	6.6	280
	End cover	6.8	288
	End cover	6.9	292
FY .. FM	Flanged Y-bearing unit with a cast housing with a square flange and eccentric locking collar	4.4	188
FY .. RM	Flanged Y-bearing unit with a cast housing with a square flange and grub screws	4.3	184
FY .. TF	Flanged Y-bearing unit with a cast housing with a square flange and grub screws	4.3	178
FY .. TR	Flanged Y-bearing unit with a cast housing with a square flange and grub screws	4.3	178
FY .. TF/VA201	Flanged Y-bearing unit for extreme temperatures with a cast housing with a square flange and grub screws	6.3	260
FY .. TF/VA228	Flanged Y-bearing unit for extreme temperatures with a cast housing with a square flange and grub screws	6.3	260
FY .. WF	Flanged Y-bearing unit with a cast housing with a square flange and eccentric locking collar	4.4	188
FY 5.. M	Flanged housing with a square flange, cast iron	4.3	178
FY 5.. U	Flanged housing with a square flange, cast iron	4.4	188
	Flanged housing with a square flange, cast iron	4.3	182
	Flanged housing with a square flange, cast iron	4.4	190
FYC .. TF	Flanged Y-bearing unit with a cast housing with a round flange and grub screws	4.9	218
FYC 5..	Flanged housing with a round flange, cast iron	4.9	218
FYJ .. KF	Flanged Y-bearing unit with a cast housing with a square flange and tapered bore	4.5	194
FYJ .. TF	Flanged Y-bearing unit with a cast housing with a square flange and grub screws	4.3	178
FYJ 5..	Flanged housing with a square flange, cast iron	4.3	178
	Flanged housing with a square flange, cast iron	4.5	194
FYK .. TF	Flanged Y-TECH unit with a housing with a square flange and grub screws	4.1	174
FYK .. TR	Flanged Y-TECH unit with a housing with a square flange and grub screws	4.1	174
FYK 5..	Flanged Y-TECH housing with a square flange, composite material	4.1	174
FYKC .. NTH	Flanged Y-bearing unit for the food industry with a composite housing with a square flange and grub screws	6.8	288
FYKC .. NTR/VE495	Flanged Y-bearing unit for the food industry with a composite housing with a square flange and grub screws	6.8	288
FYKC 5.. N	Flanged housing for the food industry with a square flange, composite material	6.8	288
FYL .. THR	Flanged Y-bearing unit for the food industry with a composite housing with a square flange and grub screws	6.8	288
FYL .. TR/VE495	Flanged Y-bearing unit for the food industry with a composite housing with a square flange and grub screws	6.8	288
FYL 5..	Flanged housing for the food industry with a square flange, composite material	6.8	288
FYM .. TF	Flanged Y-bearing unit with a cast housing with a square flange and grub screws	4.3	184
FYT .. FM	Flanged Y-bearing unit with a cast housing with an oval flange and eccentric locking collar	4.7	210
FYT .. RM	Flanged Y-bearing unit with a cast housing with an oval flange and grub screws	4.6	202
FYT .. TF	Flanged Y-bearing unit with a cast housing with an oval flange and grub screws	4.6	202
FYT .. TF/VA201	Flanged Y-bearing unit for extreme temperatures with a cast housing with an oval flange and grub screws	6.4	262

Designation	Product	Product table No.	Page
FYT .. TF/VA228	Flanged Y-bearing unit for extreme temperatures with a cast housing with an oval flange and grub screws	6.4 ..	262
FYT 5.. U	Flanged housing with an oval flange, cast iron	4.6 ..	202
	Flanged housing with an oval flange, cast iron	4.7 ..	210
FYTB .. FM	Flanged Y-bearing unit with a cast housing with an oval flange and eccentric locking collar	4.7 ..	208
FYTB .. TF	Flanged Y-bearing unit with a cast housing with an oval flange and grub screws	4.6 ..	200
FYTB .. TR	Flanged Y-bearing unit with a cast housing with an oval flange and grub screws	4.6 ..	200
FYTB .. WF	Flanged Y-bearing unit with a cast housing with an oval flange and eccentric locking collar	4.7 ..	208
FYTB 5.. M	Flanged housing with an oval flange, cast iron	4.6 ..	200
	Flanged housing with an oval flange, cast iron	4.7 ..	208
FYTBK .. TF	Flanged Y-TECH unit with a housing with an oval flange and grub screws	4.2 ..	176
FYTBK .. TR	Flanged Y-TECH unit with a housing with an oval flange and grub screws	4.2 ..	176
FYTBK 5..	Flanged Y-TECH housing with an oval flange	4.2 ..	176
FYTBKC .. NTH	Flanged Y-bearing unit for the food industry with a composite housing with an oval flange and grub screws	6.9 ..	292
FYTBKC .. NTR/VE495	Flanged Y-bearing unit for the food industry with a composite housing with an oval flange and grub screws	6.9 ..	292
FYTBKC 5.. N	Flanged housing for the food industry with an oval flange, composite material	6.9 ..	292
FY TJ .. KF	Flanged Y-bearing unit with a cast housing with an oval flange and adapter sleeve	4.8 ..	214
FY TJ .. TF	Flanged Y-bearing unit with a cast housing with an oval flange and grub screws	4.6 ..	200
FY TJ 5..	Flanged housing with an oval flange, cast iron	4.6 ..	200
	Flanged housing with an oval flange, cast iron	4.8 ..	214
FYTL .. THR	Flanged Y-bearing unit for the food industry with a composite housing with an oval flange and grub screws	6.9 ..	292
FYTL .. TR/VE495	Flanged Y-bearing unit for the food industry with a composite housing with an oval flange and grub screws	6.9 ..	292
FYTL 5..	Flanged housing for the food industry with an oval flange, composite material	6.9 ..	292
H 23	Adapter sleeve	3.4 ..	142
	Adapter sleeve	4.5 ..	194
	Adapter sleeve	4.8 ..	214
HA 23	Adapter sleeve	3.4 ..	144
	Adapter sleeve	4.5 ..	196
	Adapter sleeve	4.8 ..	216
HE 23	Adapter sleeve	3.4 ..	144
	Adapter sleeve	4.5 ..	196
	Adapter sleeve	4.8 ..	216
HE 23 .. B	Adapter sleeve	3.4 ..	144
HS 23	Adapter sleeve	3.4 ..	144
	Adapter sleeve	4.5 ..	196
P .. FM	Y-bearing plummer block unit with a pressed steel housing and eccentric locking collar	3.8 ..	158
P .. RM	Y-bearing plummer block unit with a pressed steel housing and grub screws	3.7 ..	152
P .. TF	Y-bearing plummer block unit with a pressed steel housing and grub screws	3.7 ..	152
P .. TR	Y-bearing plummer block unit with a pressed steel housing and grub screws	3.7 ..	152
P .. WF	Y-bearing plummer block unit with a pressed steel housing and eccentric locking collar	3.8 ..	158
P	Plummer block housing, pressed steel	3.7 ..	152
	Plummer block housing, pressed steel	3.8 ..	158
PF .. FM	Flanged Y-bearing unit with a pressed steel housing with a round flange and eccentric locking collar	4.11 ..	228
PF .. RM	Flanged Y-bearing unit with a pressed steel housing with a round flange and grub screws	4.10 ..	220
PF .. TF	Flanged Y-bearing unit with a pressed steel housing with a round flange and grub screws	4.10 ..	220
PF .. TR	Flanged Y-bearing unit with a pressed steel housing with a round flange and grub screws	4.10 ..	220
PF .. WF	Flanged Y-bearing unit with a pressed steel housing with a round flange and eccentric locking collar	4.11 ..	228
PF	Flanged housing with a round flange, pressed steel	4.10 ..	220
	Flanged housing with a round flange, pressed steel	4.11 ..	228
PFD .. FM	Flanged Y-bearing unit with a pressed steel housing with a triangular flange and eccentric locking collar	4.11 ..	228
PFD .. RM	Flanged Y-bearing unit with a pressed steel housing with a triangular flange and grub screws	4.10 ..	220
PFD .. TF	Flanged Y-bearing unit with a pressed steel housing with a triangular flange and grub screws	4.10 ..	220
PFD .. TR	Flanged Y-bearing unit with a pressed steel housing with a triangular flange and grub screws	4.10 ..	220
PFD .. WF	Flanged Y-bearing unit with a pressed steel housing with a triangular flange and eccentric locking collar	4.11 ..	228
PFD	Flanged housing with a triangular flange, pressed steel	4.10 ..	220
	Flanged housing with a triangular flange, pressed steel	4.11 ..	228

Product index

Designation	Product	Product table No.	Page
PFT .. FM ..	Flanged Y-bearing unit with a pressed steel housing with an oval flange and eccentric locking collar	4.11 ..	228
PFT .. RM ..	Flanged Y-bearing unit with a pressed steel housing with an oval flange and grub screws	4.10 ..	220
PFT .. TF ..	Flanged Y-bearing unit with a pressed steel housing with an oval flange and grub screws	4.10 ..	220
PFT .. TR ..	Flanged Y-bearing unit with a pressed steel housing with an oval flange and grub screws	4.10 ..	220
PFT .. WF ..	Flanged Y-bearing unit with a pressed steel housing with an oval flange and eccentric locking collar	4.11 ..	228
PFT ..	Flanged housing with an oval flange, pressed steel	4.10 ..	220
	Flanged housing with an oval flange, pressed steel	4.11 ..	228
RIS 2..	Rubber seating ring	3.7 ..	152
	Rubber seating ring	3.8 ..	158
SY .. FM ..	Y-bearing plummer block unit with a cast housing and eccentric locking collar	3.3 ..	134
SY .. PF ..	SKF ConCentra ball bearing plummer block unit with a cast housing	6.5 ..	270
SY .. TF ..	Y-bearing plummer block unit with a cast housing and grub screws	3.2 ..	122
SY .. TF/VA201 ..	Y-bearing plummer block unit for extreme temperatures with a cast housing and grub screws	6.2 ..	256
SY .. TF/VA228 ..	Y-bearing plummer block unit for extreme temperatures with a cast housing and grub screws	6.2 ..	256
SY .. TR ..	Y-bearing plummer block unit with a cast housing and grub screws	3.2 ..	122
SY .. WF ..	Y-bearing plummer block unit with a cast housing and eccentric locking collar	3.3 ..	134
SY 5.. M ..	Plummer block housing, cast iron	3.2 ..	122
	Plummer block housing, cast iron	3.3 ..	134
	Plummer block housing, cast iron	6.5 ..	270
SY 5.. U ..	Plummer block housing, cast iron	3.2 ..	126
	Plummer block housing, cast iron	3.3 ..	136
	Plummer block housing, cast iron	6.5 ..	272
SYF .. FM ..	Y-bearing plummer block unit with a cast housing and eccentric locking collar	3.6 ..	150
SYF .. TF ..	Y-bearing plummer block unit with a cast housing and grub screws	3.5 ..	148
SYF 5..	Plummer block housing, short base, cast iron	3.5 ..	148
	Plummer block housing, short base, cast iron	3.6 ..	150
SYFJ .. TF ..	Y-bearing plummer block unit with a cast housing and grub screws	3.5 ..	148
SYFJ 5..	Plummer block housing, short base, cast iron	3.5 ..	148
SYFL .. TH ..	Y-bearing plummer block unit for the food industry with a composite housing, short base and grub screws	6.7 ..	284
SYFL .. TR/VE495 ..	Y-bearing plummer block unit for the food industry with a composite housing, short base and grub screws	6.7 ..	284
SYFL 5..	Plummer block housing for the food industry, short base, composite material	6.7 ..	284
SYH .. FM ..	Y-bearing plummer block unit with a cast housing and eccentric locking collar	3.3 ..	136
SYH .. TF ..	Y-bearing plummer block unit with a cast housing and grub screws	3.2 ..	126
SYH .. WF ..	Y-bearing plummer block unit with a cast housing and eccentric locking collar	3.3 ..	136
SYH 5.. U ..	Plummer block housing, cast iron	3.2 ..	126
	Plummer block housing, cast iron	3.3 ..	136
SYJ .. KF ..	Y-bearing plummer block unit with a cast housing and tapered bore	3.4 ..	142
SYJ .. TF ..	Y-bearing plummer block unit with a cast housing and grub screws	3.2 ..	122
SYJ 5..	Plummer block housing, cast iron	3.2 ..	122
	Plummer block housing, cast iron	3.4 ..	142
SYK .. TF ..	Y-TECH plummer block unit with grub screws	3.1 ..	120
SYK .. TR ..	Y-TECH plummer block unit with grub screws	3.1 ..	120
SYK 5..	Y-TECH plummer block housing	3.1 ..	120
SYKC .. NTH ..	Y-bearing plummer block unit for the food industry with a composite housing and grub screws	6.6 ..	280
SYKC .. NTR/VE495 ..	Y-bearing plummer block unit for the food industry with a composite housing and grub screws	6.6 ..	280
SYKC 5.. N ..	Plummer block housing for the food industry, composite material	6.6 ..	280
SYL .. TH ..	Y-bearing plummer block unit for the food industry with a composite housing and grub screws	6.6 ..	280
SYL .. TR/VE495 ..	Y-bearing plummer block unit for the food industry with a composite housing and grub screws	6.6 ..	280
SYL 5..	Plummer block housing for the food industry, composite material	6.6 ..	280
SYM .. TF ..	Y-bearing plummer block unit for air handling systems with a cast housing and grub screws	3.2 ..	128
SYM 5.. U ..	Plummer block housing, cast iron	3.2 ..	128
TU .. FM ..	Y-bearing take-up unit with a cast housing and eccentric locking collar	5.2 ..	244
TU .. TF ..	Y-bearing take-up unit with a cast housing and grub screws	5.1 ..	238
TU 5.. M ..	Take-up housing, cast iron	5.1 ..	238
	Take-up housing, cast iron	5.2 ..	244
TU 5.. U ..	Take-up housing, cast iron	5.1 ..	240

Designation	Product	Product table No.	Page
TUJ .. TF ..	Y-bearing take-up unit with a cast housing and grub screws	5.1	238
TUJ 5..	Take-up housing, cast iron	5.1	238
TUL .. TH ..	Y-bearing take-up unit for the food industry with a composite housing and grub screws	6.10	296
TUL .. TR/VE495 ..	Y-bearing take-up unit for the food industry with a composite housing and grub screws	6.10	296
TUL 5..	Take-up housing for the food industry, composite material	6.10	296
VAR 2.. -2F ..	Y-bearing with grub screws	2.1	92
VAR 2.. -2FW/VA201 ..	Y-bearing with grub screws for extreme temperatures	6.1	254
VAR 2.. -2FW/VA228 ..	Y-bearing with grub screws for extreme temperatures	6.1	254
VAR 2.. -2RF ..	Y-bearing with grub screws	2.1	92
VAR 2.. -2RF/HV ..	Stainless steel Y-bearing with grub screws	2.1	92
VAR 2.. -2RF/VE495 ..	Y-bearing with grub screws for the food industry	2.1	92
YAT 2..	Y-bearings with grub screws	2.1	92
YEL 2.. -2F ..	Y-bearing with eccentric locking collar	2.2	98
YEL 2.. -2RF ..	Y-bearing with eccentric locking collar, rubberized flinger	2.2	98
YET 2..	Y-bearing with eccentric locking collar	2.2	98
YHC 2..	Y-bearing with a hexagonal bore	2.5	108
YSA 2.. -2FK ..	Y-bearing with a tapered bore	2.3	102
YSP 2.. 2F ..	Y-bearing for SKF ConCentra ball bearing unit	6.5	270



skf.com